



2P

CR 86212

**HUGHES**

HUGHES AIRCRAFT COMPANY

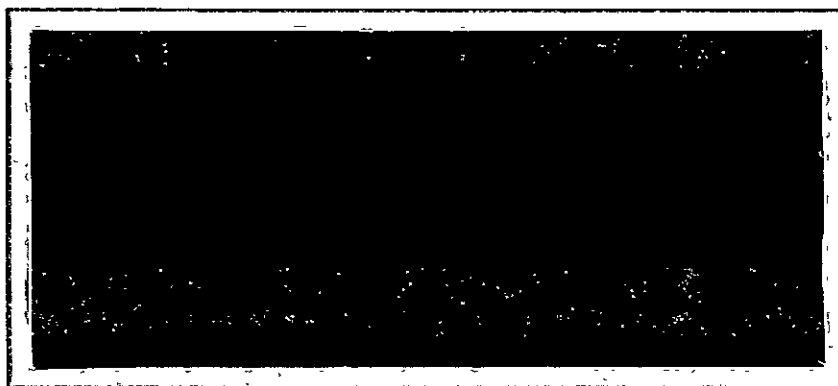

**ELECTRON DYNAMICS DIVISION**

POST OFFICE BOX 2999 • TORRANCE, CALIFORNIA • 90509

Reproduced by  
**NATIONAL TECHNICAL  
INFORMATION SERVICE**  
Springfield, Va. 22151

|                            |   |                  |
|----------------------------|---|------------------|
| STANDARD FACILITY FORM 602 | <b>N69-35791</b>                              |                  |
|                            | (ACCESSION NUMBER)                            | (THRU)           |
|                            | 172<br>(PAGES)                                | 1<br>(CODE)      |
|                            | NASACR 86212<br>(NASA CR OR TMX OR AD NUMBER) | 16<br>(CATEGORY) |

HUGHES AIRCRAFT COMPANY  
ELECTRON DYNAMICS DIVISION  
3100 WEST LOMITA BOULEVARD  
Torrance, California 90509

W-2845

INTERIM REPORT  
RESEARCH DIRECTED TOWARD PERFECTING  
A DESIGN FOR A SPACE QUALIFIED He-Ne LASER

NASA CONTRACT NAS 12-579

INTERIM REPORT

NASA CONTRACT NAS 12-579

RESEARCH DIRECTED TOWARD PERFECTING  
A DESIGN FOR A SPACE QUALIFIED He-Ne LASER

January 1969

PREPARED BY

WILLIAM P. KOLB

ELECTRON DYNAMICS DIVISION  
HUGHES AIRCRAFT COMPANY

SPONSORED BY

ELECTRONICS RESEARCH CENTER  
NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

## ABSTRACT

The research and development toward perfecting a space-qualified 5 mW He-Ne laser is reported. The laser and power supply, which are integrated into a single package, provide a rugged, lightweight, compact unit. The design details of the unit are presented. The laser design data that was presented at the end of the initial phase of this contract is also included in its entirety as an Appendix. The results of special studies conducted in cold cathode geometry and lifetests; internal mirrors; mirror and window seals; and environmental testing are reported. Results obtained in testing the first discharge tube of the modified design are also included.

## TABLE OF CONTENTS

| <u>Section</u>   | <u>Page No.</u> |
|--|-----------------|
| I. Introduction  | 1               |
| II. Space Qualified Laser Design   | 3               |
| A. Discharge Tube Design   | 3               |
| B. Optical Cavity Design   | 7               |
| C. Power Supply Design   | 8               |
| D. Package Design  | 12              |
| E. Reliability Prediction  | 15              |
| III. Special Tests and Evaluations   | 20              |
| A. Cathode Studies and Lifetests   | 20              |
| B. Mirror Studies  | 23              |
| C. Mirror and Window Seals   | 27              |
| D. Environmental Testing   | 30              |
| E. Discharge Tube Number One   | 31              |
| IV. Plans for the Completion of the Program                                | 35              |
| References   | 36              |
| <hr/>  |                 |
| APPENDIX A - New Technology  |                 |
| APPENDIX B - Specifications for Space Qualified<br>Laser (He-Ne), Phase II |                 |
| APPENDIX C - Design for a Space Qualified Laser<br>Oral Presentation Data  |                 |

## LIST OF ILLUSTRATIONS

| <u>Figure No.</u>  | <u>Page No.</u> |
|--|-----------------|
| II-1. Metal ceramic tube cross sectional view.   | 4               |
| II-2. Detailed view of differential screw tuning mechanism.  | 6               |
| II-3. Block diagram of SQL power supply.   | 9               |
| II-4. Solar cell characteristics.  | 11              |
| II-5. Telemetry circuit for monitoring laser output power.   | 12              |
| II-6. Laser/power supply package.  | 13              |
| II-7. Output window/beam splitter assembly.  | 14              |
| II-8. Reliability diagram.   | 15              |
| II-9. Reliability as a function of time for MIL Spec parts and high reliability parts.                         | 17              |
| III-1. Cathode geometry evaluation lifetest data.  | 22              |
| III-2. Glass tube used for internal mirror tests.  | 24              |
| III-3. Measured $TEM_{00}$ power output for a short (9 in.) bore 3083H with different radius internal mirrors. | 25              |
| III-4. Measured $TEM_{00}$ power output for a short (9 in.) bore 3083H with external mirrors.                  | 26              |
| III-5. Output mirror and window design.  | 28              |
| III-6. Output window test assembly.  | 29              |
| III-7. Measured $TEM_{00}$ power output for discharge tube number one.   | 33              |
| III-8. Sketch of output modes observed with optical spectrum analyzer.   | 34              |

## SECTION I INTRODUCTION

This document summarizes work performed by the Hughes Aircraft Company, Electron Dynamics Division for the National Aeronautics and Space Administration under Contract NAS-12-579, "Research Directed Toward Perfecting a Design for a Space-Qualified Laser." It is intended to cover the results of the contractual study performed in Phase I and the interim of Phase II. The text of this report covers the interim of Phase II, while Phase I is covered in Appendix C, "Design for a Space Qualified Laser - Oral Presentation Data," which is a summary of the pertinent data presented verbally by Hughes personnel to NASA/ERC personnel at Cambridge, Massachusetts, on 1 February 1968.

The objectives of Phase I are outlined in Section I of Appendix C. The objectives of Phase II of the program are best set forth in the Statement of Work:

"The Contractor shall supply the necessary personnel, facilities, services, and materials to accomplish the work set forth below:"

### PHASE II

#### Item 3

Modify the design perfected under Item 1, to comply with the several specifications outlined in Exhibit A, attached hereto and made a part hereof (included as Appendix B).

#### Item 4

Upon approval by the Contract Monitor of the design developed under Item 3, and in accordance therewith, fabricate four laser plasma tubes, two power supplies in packages, and laser mounts. This fabrication shall include, but is not limited to, the following:

- a. The operation of these laser plasma tubes in the so-called "burn-in" mode.
- b. The performance of environmental testing on subassemblies and the complete unit to establish the design in accordance with Exhibit A.
- c. The analysis and correction of failures occurring at any point.
- d. The generation of sufficient and adequate documentation to permit an orderly transition to the subsequent procurement of fully space-qualified lasers.
- e. The implementation of special or separate testing of critical items in the laser design. This can include cathode life tests on dummy tubes, assessment of UV damage to internal mirrors in test fixtures, etc.

#### Item 5

Upon completion of Items 3 and 4, an oral presentation and review will be held at NASA/ERC, Cambridge, Massachusetts. Five (5) copies of all pertinent data shall be made available to the contract monitor one week before said review. This shall include all the documentation generated on the program as well as a cost and delivery schedule for possible future procurement of fully space-qualified lasers. Two of the laser packages developed and tested under this contract shall be delivered to NASA/ERC at the time of the oral presentation and review.

Item 3 of the Statement of Work, as given previously, has been fulfilled. The modified design of a Space Qualified Laser (SQL) required under Item 3 is presented in Section II of this document. The results of special tests and evaluations of critical items of the laser design are covered in Section III.



## SECTION II

### SPACE QUALIFIED LASER DESIGN

In this section are presented the details of the laser design developed under the present contract. This basic design, which was presented at the end of Phase I (Appendix C), has been modified to incorporate the results of the special test and evaluations which are documented in Section III.

#### A. DISCHARGE TUBE DESIGN

The construction details of the metal-ceramic discharge tube are shown in Figure II-1 along with the optical cavity support and adjustment structure. This design is basically the same as discussed in Section II-A of Appendix C. A prototype discharge tube of this design has been fabricated with no unexpected difficulties. The items shown in Figure II-1 are named in Table II-1 and are described below.

High purity  $\text{Al}_2\text{O}_3$  is used for the ceramic bore (7). The active bore dimensions for the prototype tube are 10 in by 1.5 mm i.d. The bore is metallized and sealed to the internal bore support (9) and the end bore supports (21) and (22). The cathode vacuum jacket (6) with ends (21) and (22) form a gas reservoir with approximately  $350 \text{ cm}^3$  volume. The cathode consists of two processed tantalum cylinders (30) with end caps (29) slipped inside the vacuum envelope (6). A dielectric separator (8) made of  $\text{Al}_2\text{O}_3$  ceramic is held in place by three stainless steel pins (23) which are heliarced to the cathode vacuum jacket cylinder (6).

The anodes of this dual discharge design are formed by the snouts on the flange adapter (25) which extend into the bellows (13) at each end of the discharge tube. Each bellows is brazed to an adapter ring (12)

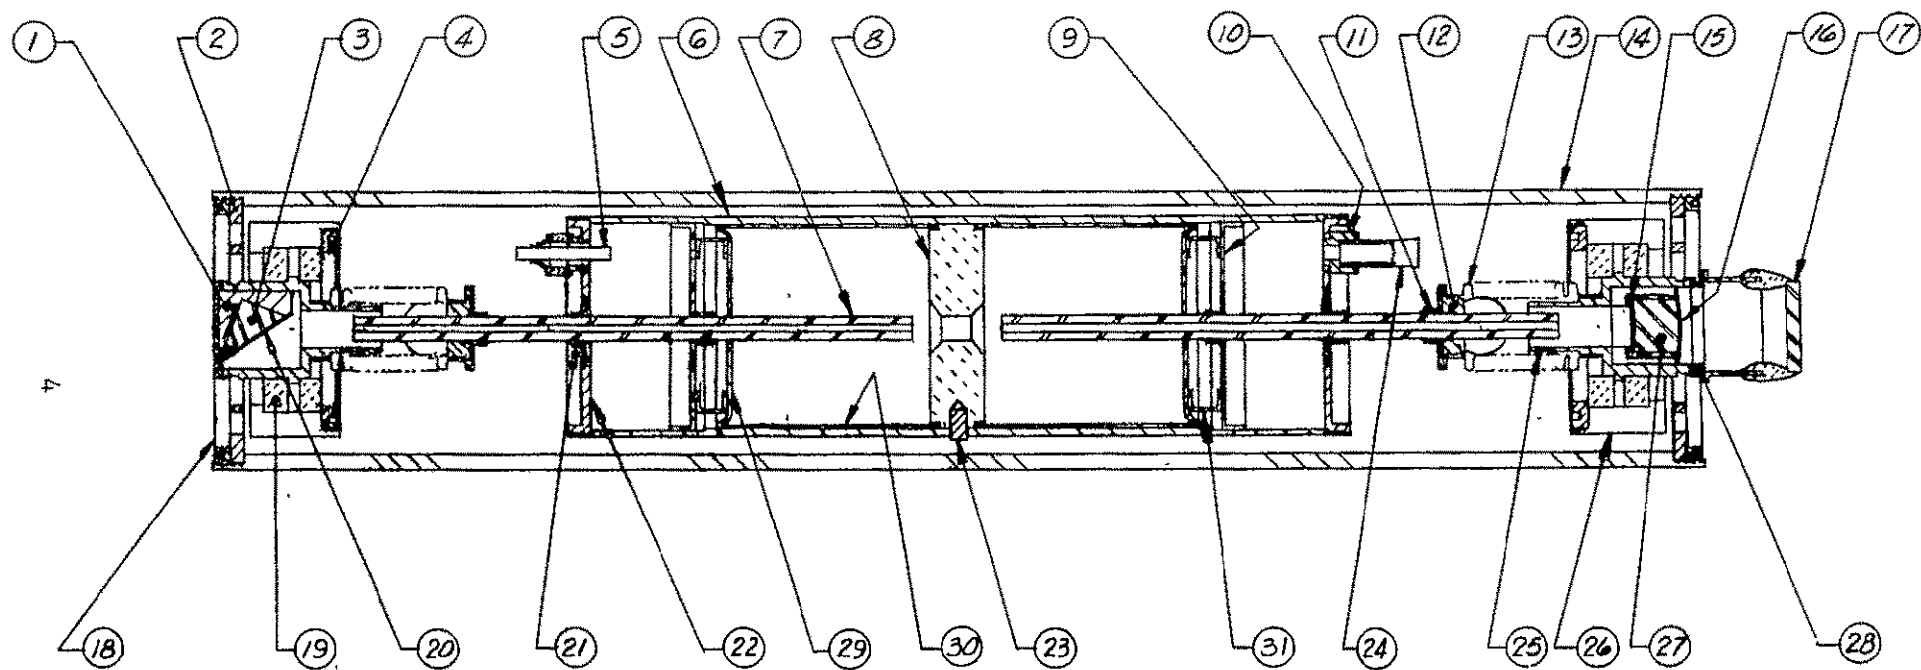


Figure II-1 Metal-ceramic tube cross sectional view.

TABLE II-1      Legend for Figure II-1

1. Prism Holder
2. Mirror Support
3. Brewster's Angle Reflectance Prism
4. Mirror Mount Retainer
5. Getter Feed Thru Assembly
6. Cathode Vacuum Jacket
7. Ceramic Bore
8. Dielectric Separator
9. Internal Bore Support
10. Pumpout Adapter
11. Heliarc Flange Adapter
12. Bellows Adapter
13. Bellows
14. Cavity Support Cylinder
15. Output Mirror Holder
16. Mirror Clamp
17. Output Window Assembly
18. Mirror Support Retainer
19. Insulator
20. Prism Clamp
21. Adapter End Cap
22. Cathode Bore Support
23. Separator Pin
24. Pinch-off Tube
25. Flange Adapter
26. Adjusting Mirror Support
27. Output Mirror
28. Output Window Flange Adapter
28. Cathode End Cap
30. Processed Tantalum Cathode
31. Cathode Loading Spring

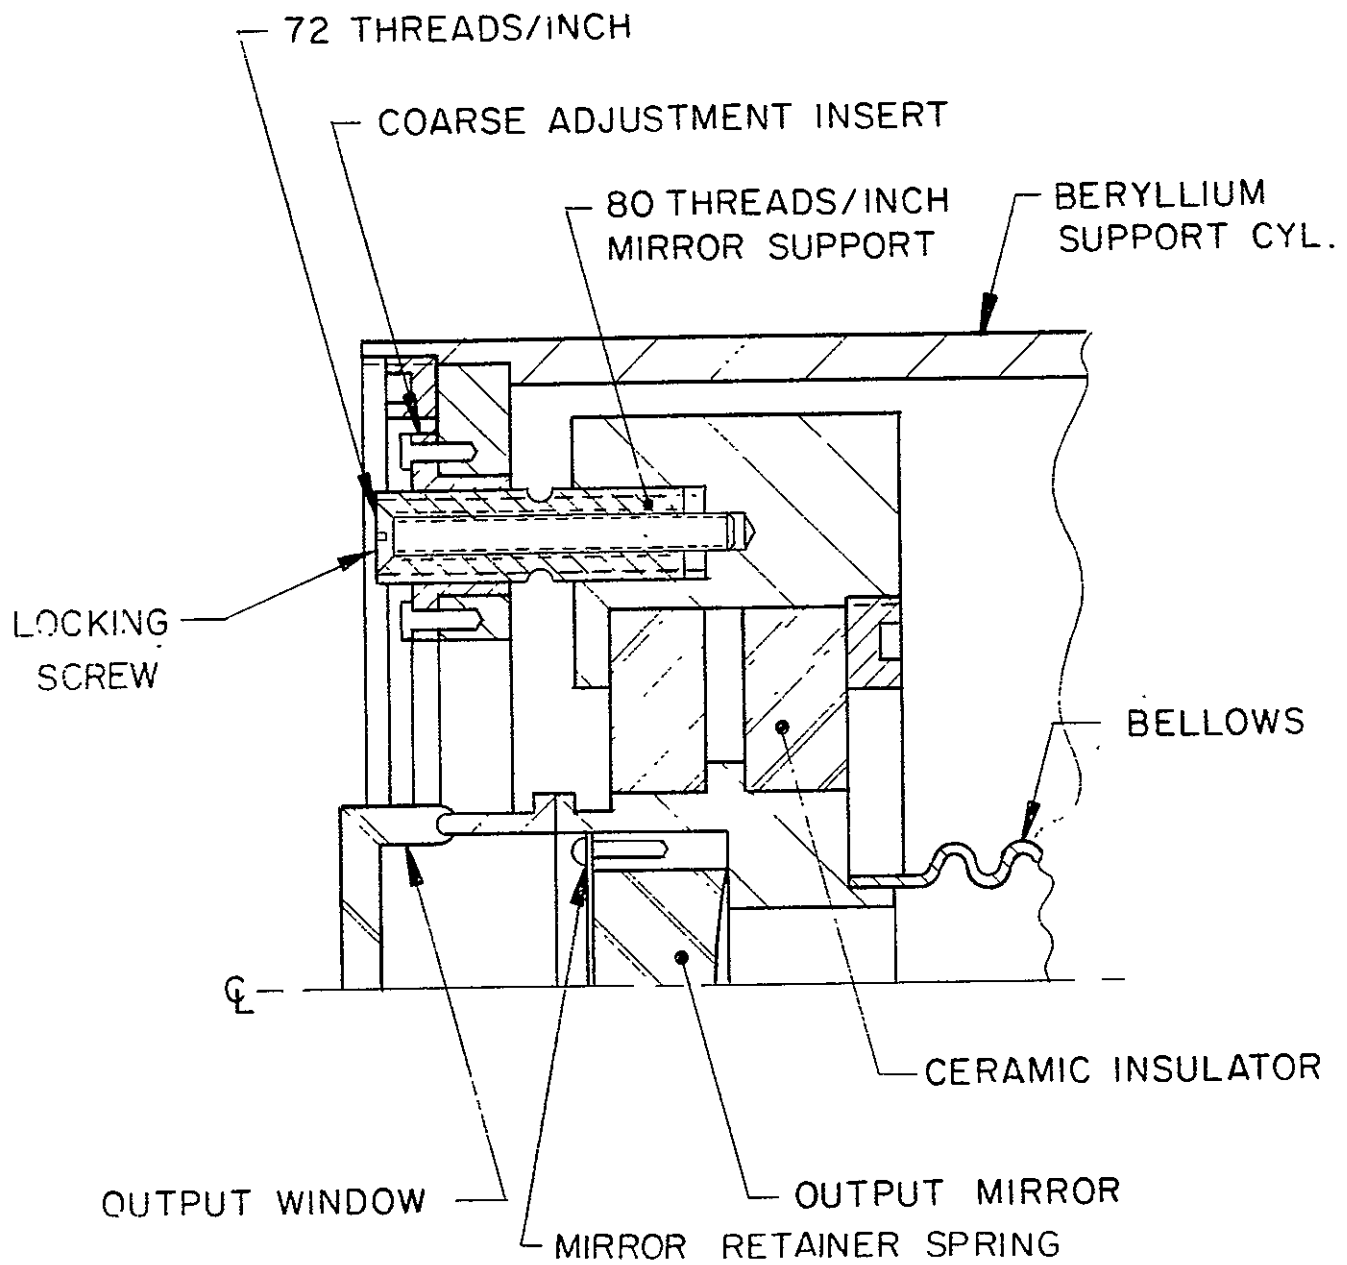


Figure II-2 Detailed view of differential screw tuning mechanism.

which is, in turn, heliarced to the flange (11) brazed to the metallized ceramic bore. The vacuum envelope is completed by the prism holder (1) and the output window assembly (17). The Brewster's angle prism (3) is held mechanically in part (1) by a clamping mask-spring (20). The output mirror (27) is also held mechanically in the mirror holder (5) by a clamp (16).

Electrical connection to the getter is made through a ceramic feed-through insulator (5). The vacuum tipoff (24) is made by pinching the copper vacuum pump out tube.

#### B. OPTICAL CAVITY DESIGN

The optical cavity support structure is shown in the cross sectional drawing in Figure II-1. It consists of a simple beryllium cylinder (14) that is 2.50 inches in diameter with a .125 inch wall thickness and 13.50 inches long. The vacuum envelope (6) is held rigidly to the optical cavity support cylinder (14) with a layer of potting compound suitable for use in spacecraft. The mirrors are held rigidly with respect to the outer cylinder by adjustable mounts (See Figure II-2). The mirror holder assemblies are held in the adjusting mirror supports (26) via insulators (19), necessary to allow the optical support structure to remain at ground (cathode) potential while the mirror holder floats at anode potential. The adjusting mirror support (26) is positioned with respect to the support structure end plate by differential screw mechanisms.

The cavity support tube is held over the central 4.00 inches in an aluminum mounting bracket which is dip brazed to the bottom and one side of the laser/power supply package. This mounting bracket provides both mechanical support and a thermal path to the heat sink (spacecraft).

The optical cavity is basically a long radius-flat configuration. The output mirror (27) has a spherical radius of 200 cm and is coated for 1.0% transmission at 6328 Å. A coated Brewster's angle half prism (3) is used for the high reflectance flat mirror. The prism also provides the polarization reference for the beam. The mirror spacing is 33 cm.

### C. POWER SUPPLY DESIGN

The detailed design of the laser power supply is presented in Section II-D of Appendix C. The prototype power supply which was constructed during Phase I of the present contract has been tested to verify this design. In addition, this unit has been life tested for over 5,500 hours with absolutely no problems.

Figure II-3 shows a block diagram of the dual power supply which is made up of the following seven subcircuits:

- Control logic
- Current regulator
- Dc to dc converter
- High voltage filter
- Current sensing
- Starting circuitry
- Telemetry monitoring circuitry

With the exception of the starting circuitry and telemetry monitoring circuitry no major design changes or additions have been made except for the use of MIL Spec or equivalent parts. These changes are detailed below.

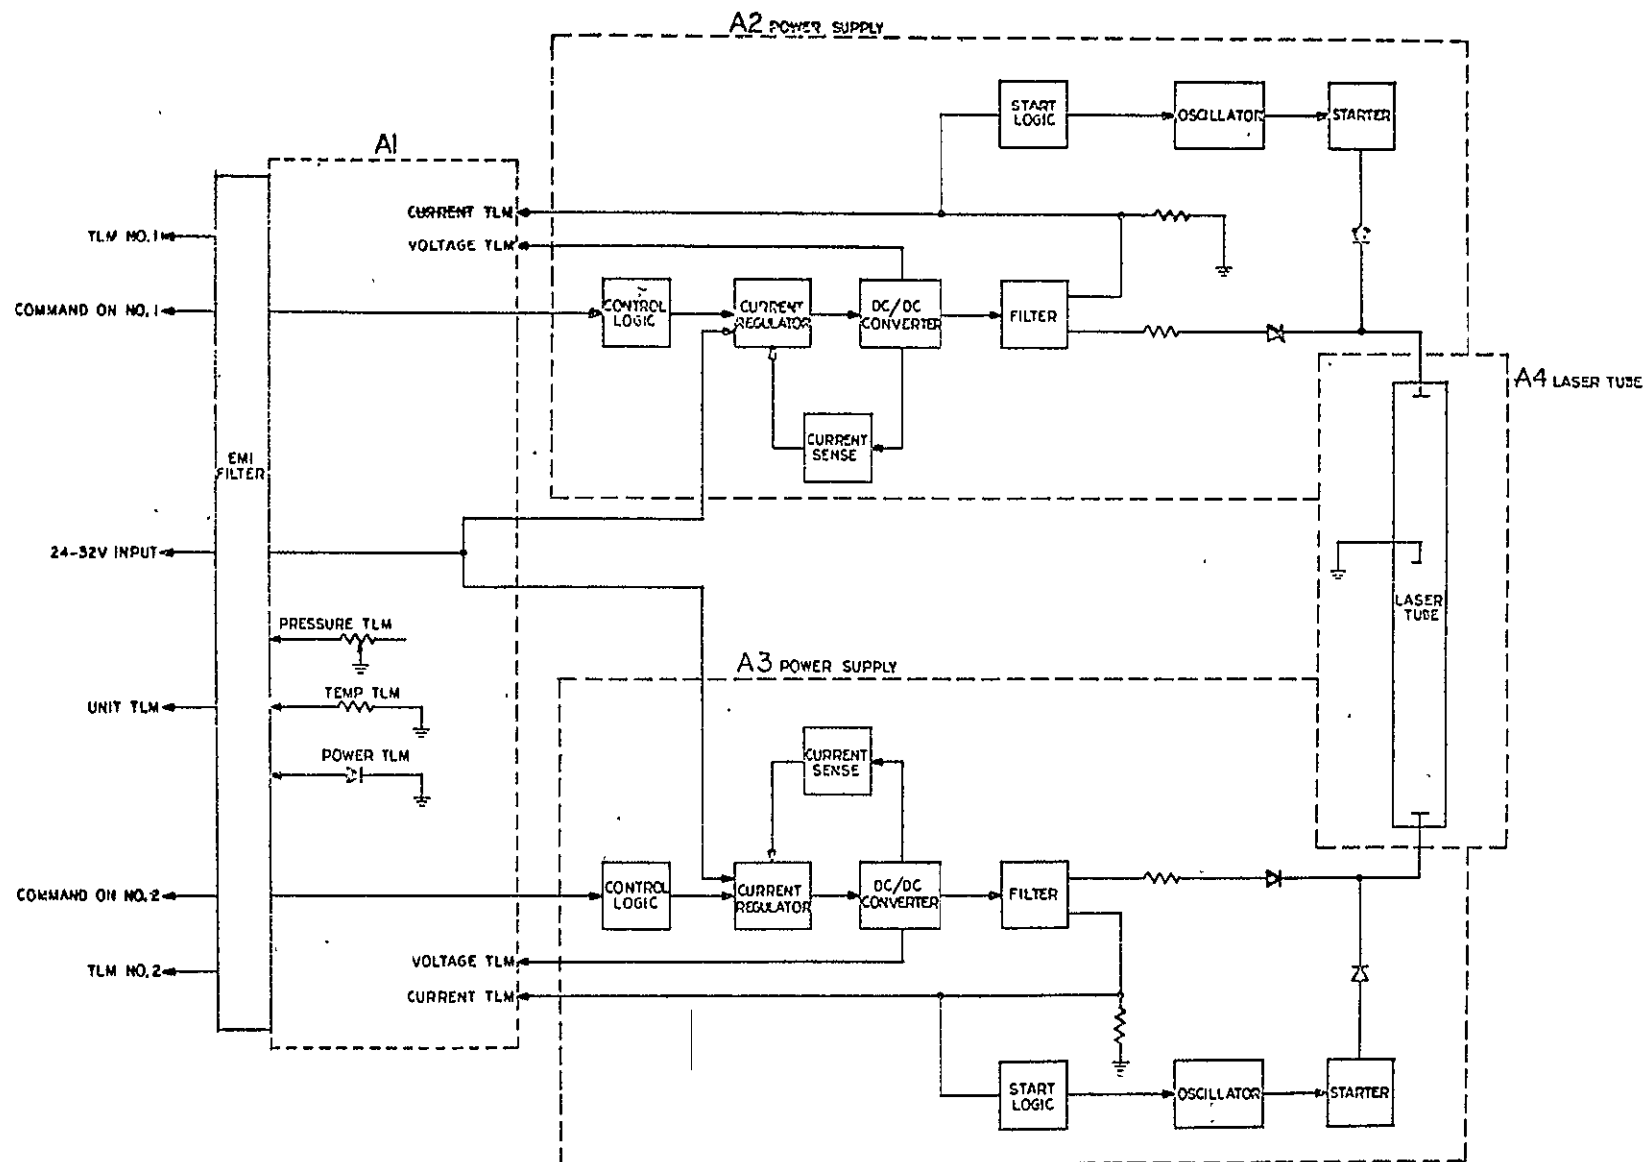


Figure II-3 Block diagram of SQL power supply.

## 1. Starting Circuitry

The initial starting circuit design employed a silicon control rectifier which was switched allowing a capacitor to discharge through the primary of the trigger transformer to provide the starting voltage pulse to the anode of the discharge tube. However, SCR's are not generally space approved components. A design change is being considered to replace the SCR with a transistor switching circuit.

## 2. Telemetry

Standard telemetry outputs (0 - 5 VDC) are provided for monitoring both anode voltages and currents as well as the package pressure, laser temperature and laser output power. The following changes or additions have been made in the telemetry circuitry. A solar cell was tested and found to have sufficient output to use as a laser output power detector. The characteristics of this solar cell are shown in Figure II-4. An operational amplifier circuit to provide the 0 - 5 volt telemetry output is shown in Figure II-5. The solar cell has a temperature coefficient of approximately 0.1% current change per degree centigrade with a constant light input.

A pressure sensor has been selected for monitoring the package pressure. It is manufactured by Bourns Instrument and has been tested to or above the required environmental specifications for the SQL. This device provides a resistance that varies linearly with the absolute pressure. An operational amplifier will be used with this sensor to obtain the proper level output.

A thermistor has been selected as the temperature sensor. It too will be used in conjunction with an operational amplifier. This will be used to monitor the laser mounting bracket temperature.



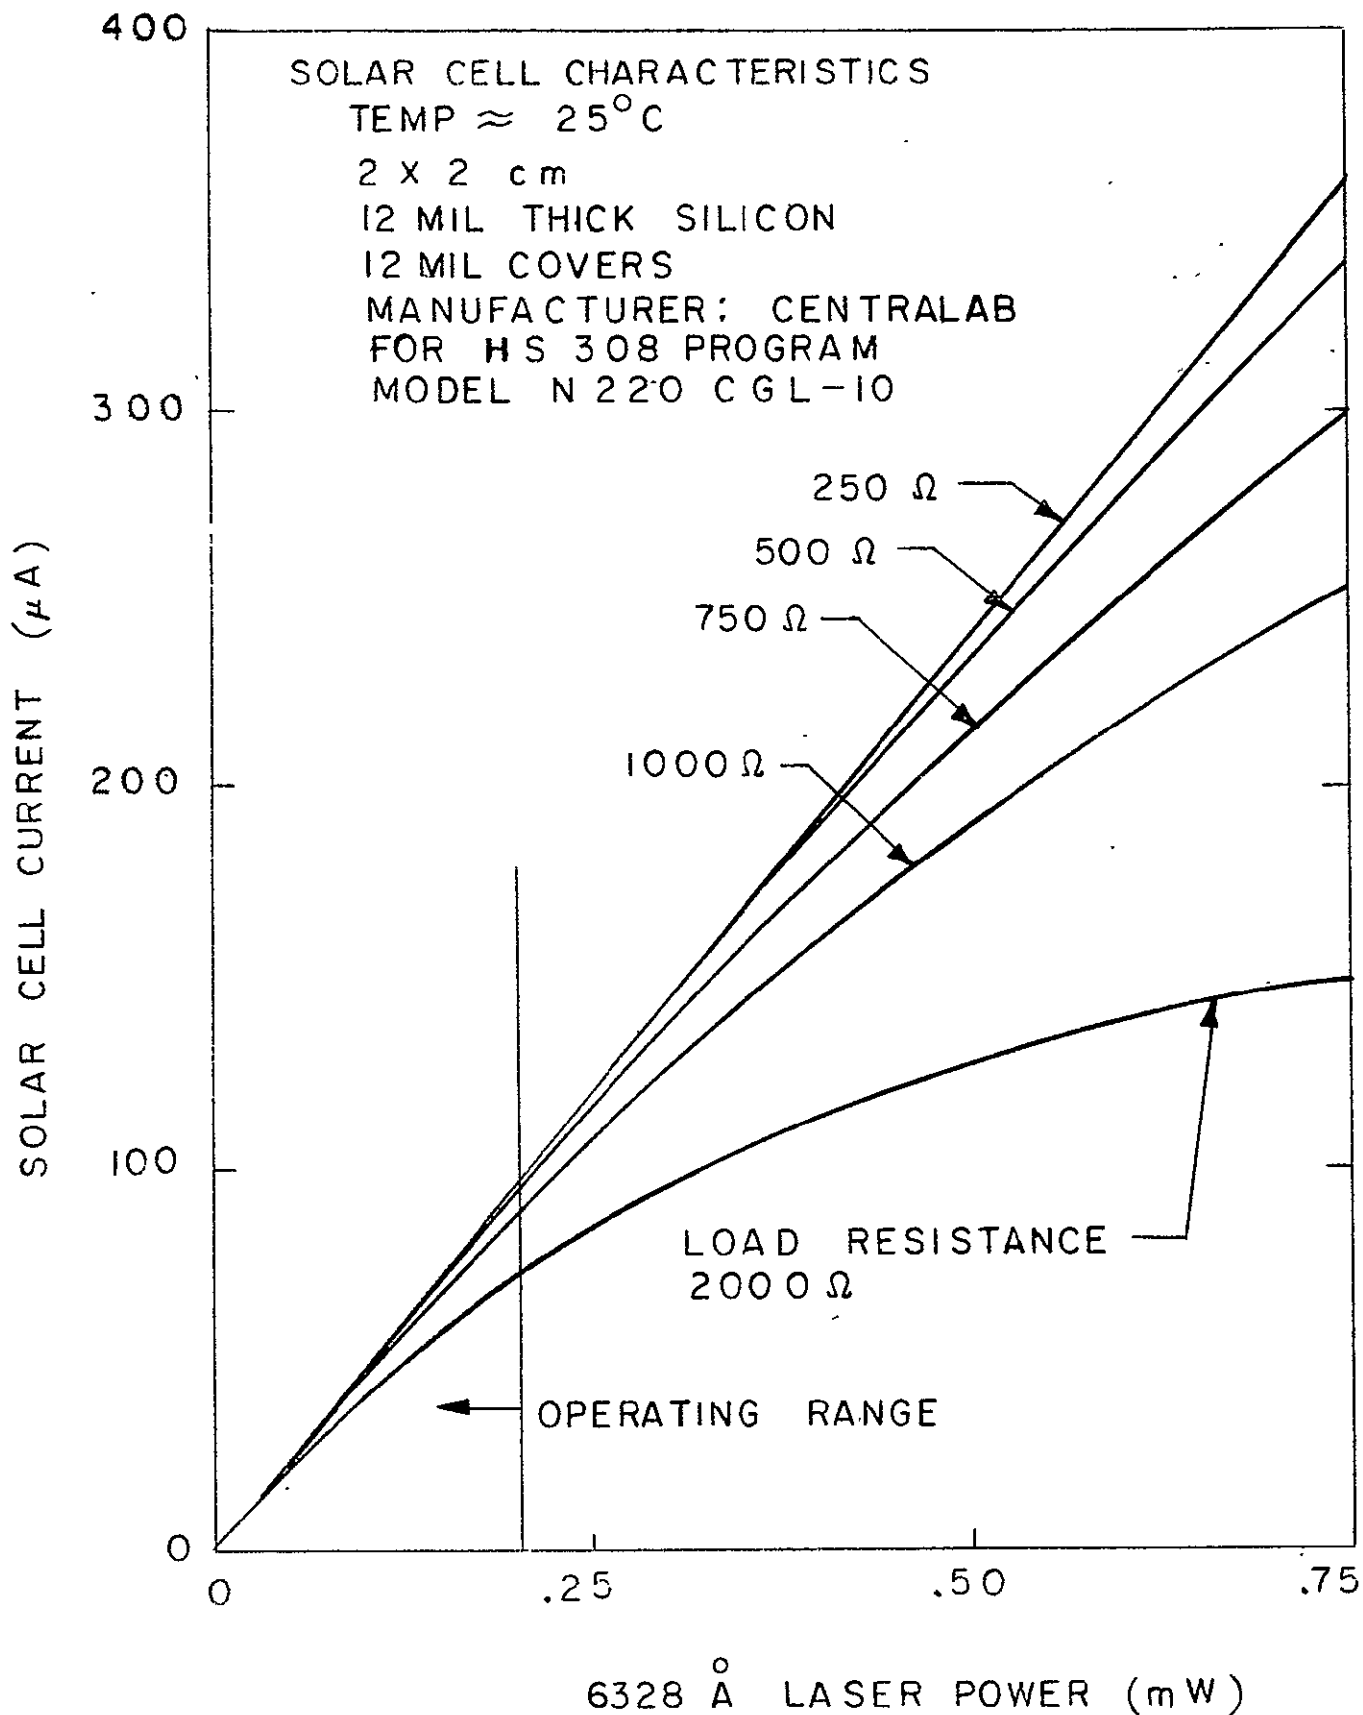


Figure II-4 Solar cell characteristics.

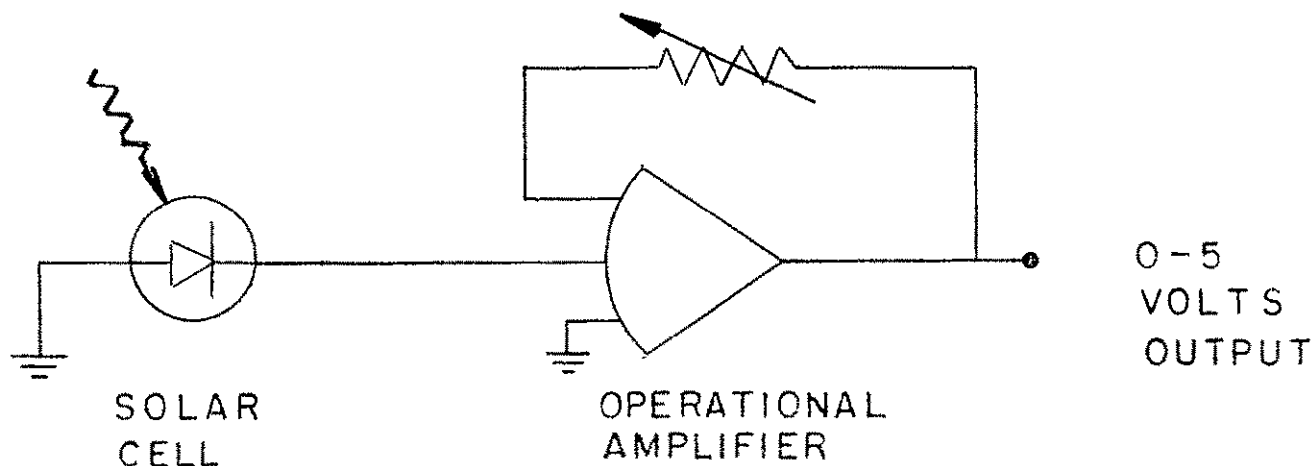


Figure II-5 Telemetry circuit for monitoring laser output power.

#### D. PACKAGE DESIGN

The integrated laser/power supply package design is shown in Figure II-6. This hermetically sealed helium-filled package is made of aluminum alloy (6061-T6) parts dip brazed together. The electrical connector for the 28 V prime power and the telemetry is a helium-leak tight assembly that is soldered to the package. The output window/beam splitter assembly is shown in Figure II-7. The output window will be sealed with a butyl rubber "O" ring. The assembly housing is dip brazed to the package. A pressure relief valve is provided for evacuating and back filling. A channel which is located around the top of the package, holds a gasket to which the top is sealed. This gasket seal can be used repeatedly if necessary.

An adjustable precision edge is provided for beam alignment. The two independently adjustable surfaces will both be aligned parallel to the beam axis. The surfaces are made of hardened tool steel ground to the required flatness.

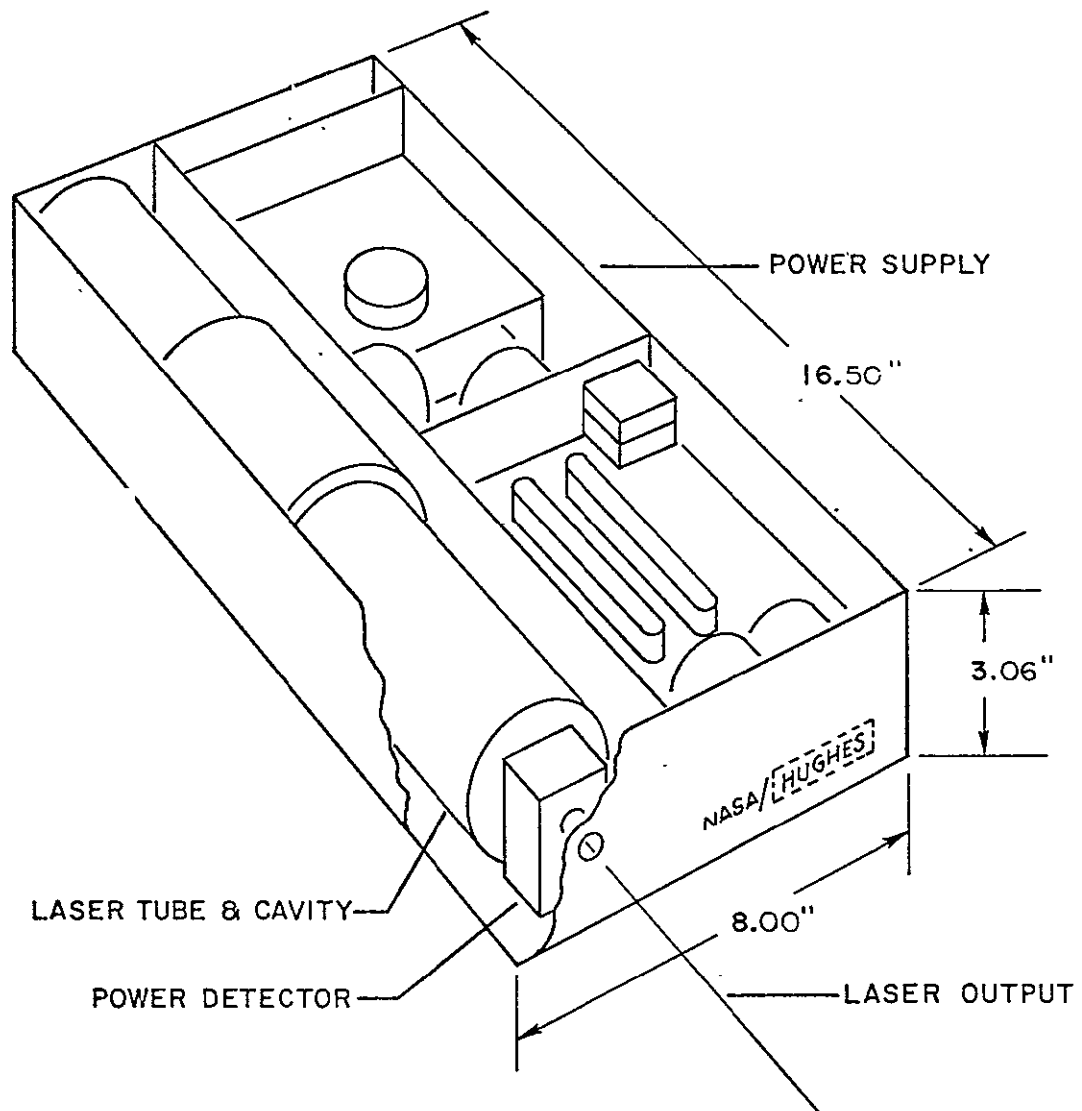


Figure II-6 Laser/power supply package

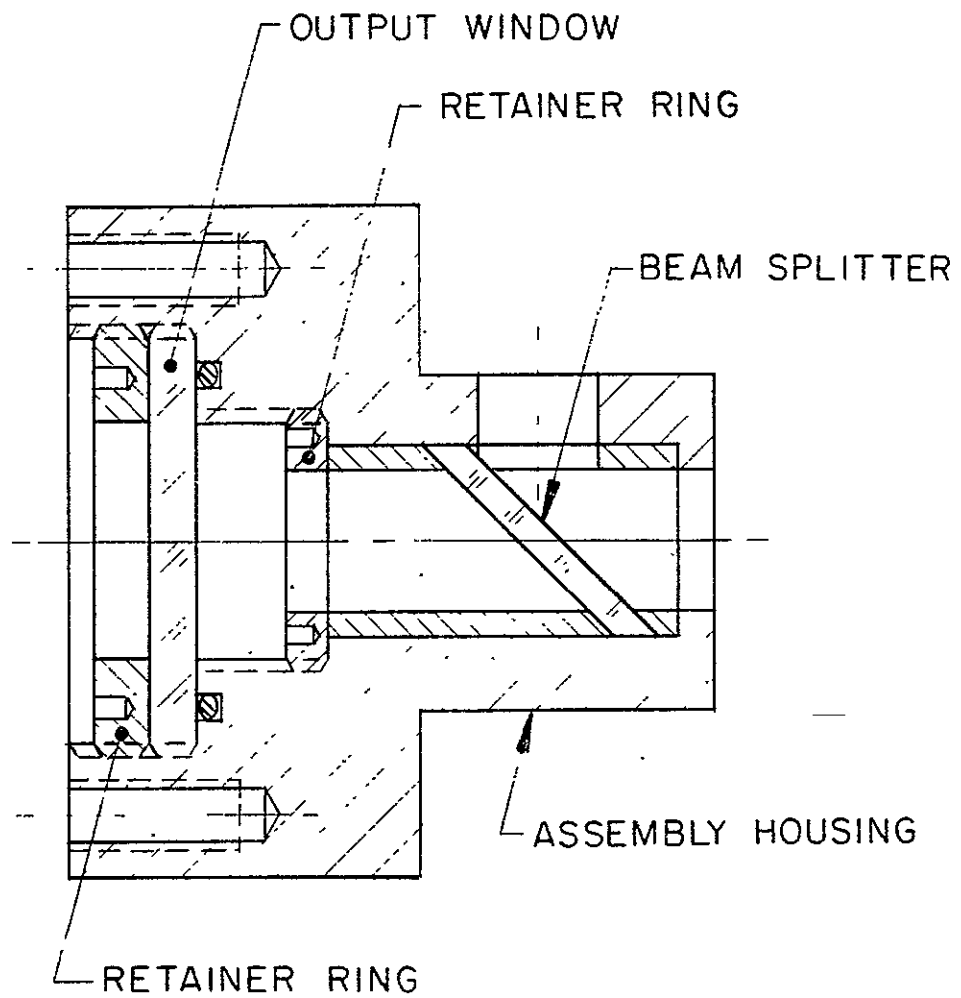


Figure II-7 Output window/beam splitter assembly.

## E. RELIABILITY PREDICTION

This prediction updates the prediction of Section J of Appendix C. The reliability of the integrated laser and power supplies is expressed as the product of the probability of mission success for each of its sub-assemblies. The reliability model of Phase I remains valid as the overall laser unit has two discharge sections within a common metal-ceramic envelope. Each section has separate power supplies which provide the anode and starting voltages and required telemetry circuits. The model is expressed as a series-parallel model and is diagrammed in Figure II-8. This model recognizes two modes of operation. One mode is the probability that the integrated laser provides full power output of 5 mW (i.e., no failures). The probability of success for mode 1 may be expressed by equation 1, which assumes that all subassemblies operate.

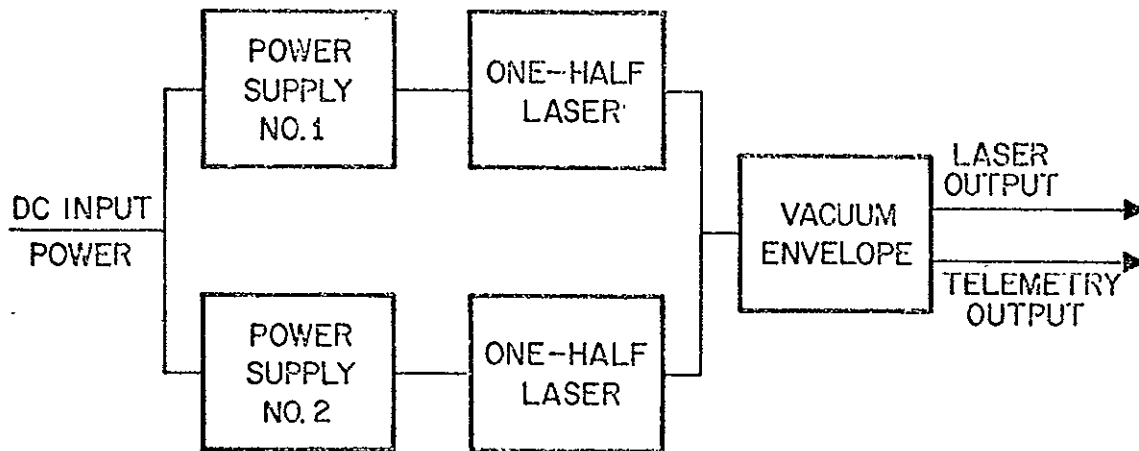


Figure II-8 Reliability diagram.

$$R_{\text{laser}} = R_{\text{PS}}^2 \times R_{\text{LDS}}^2 \times R_{\text{VEP}} \quad (1)$$

where

$R_{\text{laser}}$  = Reliability of the integrated laser and its power supplies (probability everything works).  
 $R_{\text{PS}}$  = Reliability of one power supply  
 $R_{\text{LDS}}$  = Reliability of one discharge section  
 $R_{\text{VEP}}$  = Reliability of the common laser tube vacuum envelope and package.

The second mode for which the probability of success is evaluated allows performance at approximately 35% of the power output; that is, mode 2 assumes the failure of one power supply or discharge element. The probability of success for mode 2 operation is expressed by equation 2.

$$R_{\text{DL}} = 1 - (1 - R_{\text{PS}} R_{\text{LDS}})^2 R_{\text{VEP}} \quad (2)$$

The predicted reliability of the integrated laser unit is shown in Figure II-9. This figure shows the reliability for no failures (5 mW output) and for the degraded mode of operation which provides 35% of the power output.

In addition, curves are provided for the effect on reliability using MIL-spec parts (Phase II) and the use of high reliability parts which will be utilized on the flight unit program (Phase III). This analysis of reliability is based upon actual Hughes laser life test experience and failure rate data of electronic parts selected from MIL-HDBK-217A, "Reliability Stress and Failure Rate Data for Electronic Equipment".

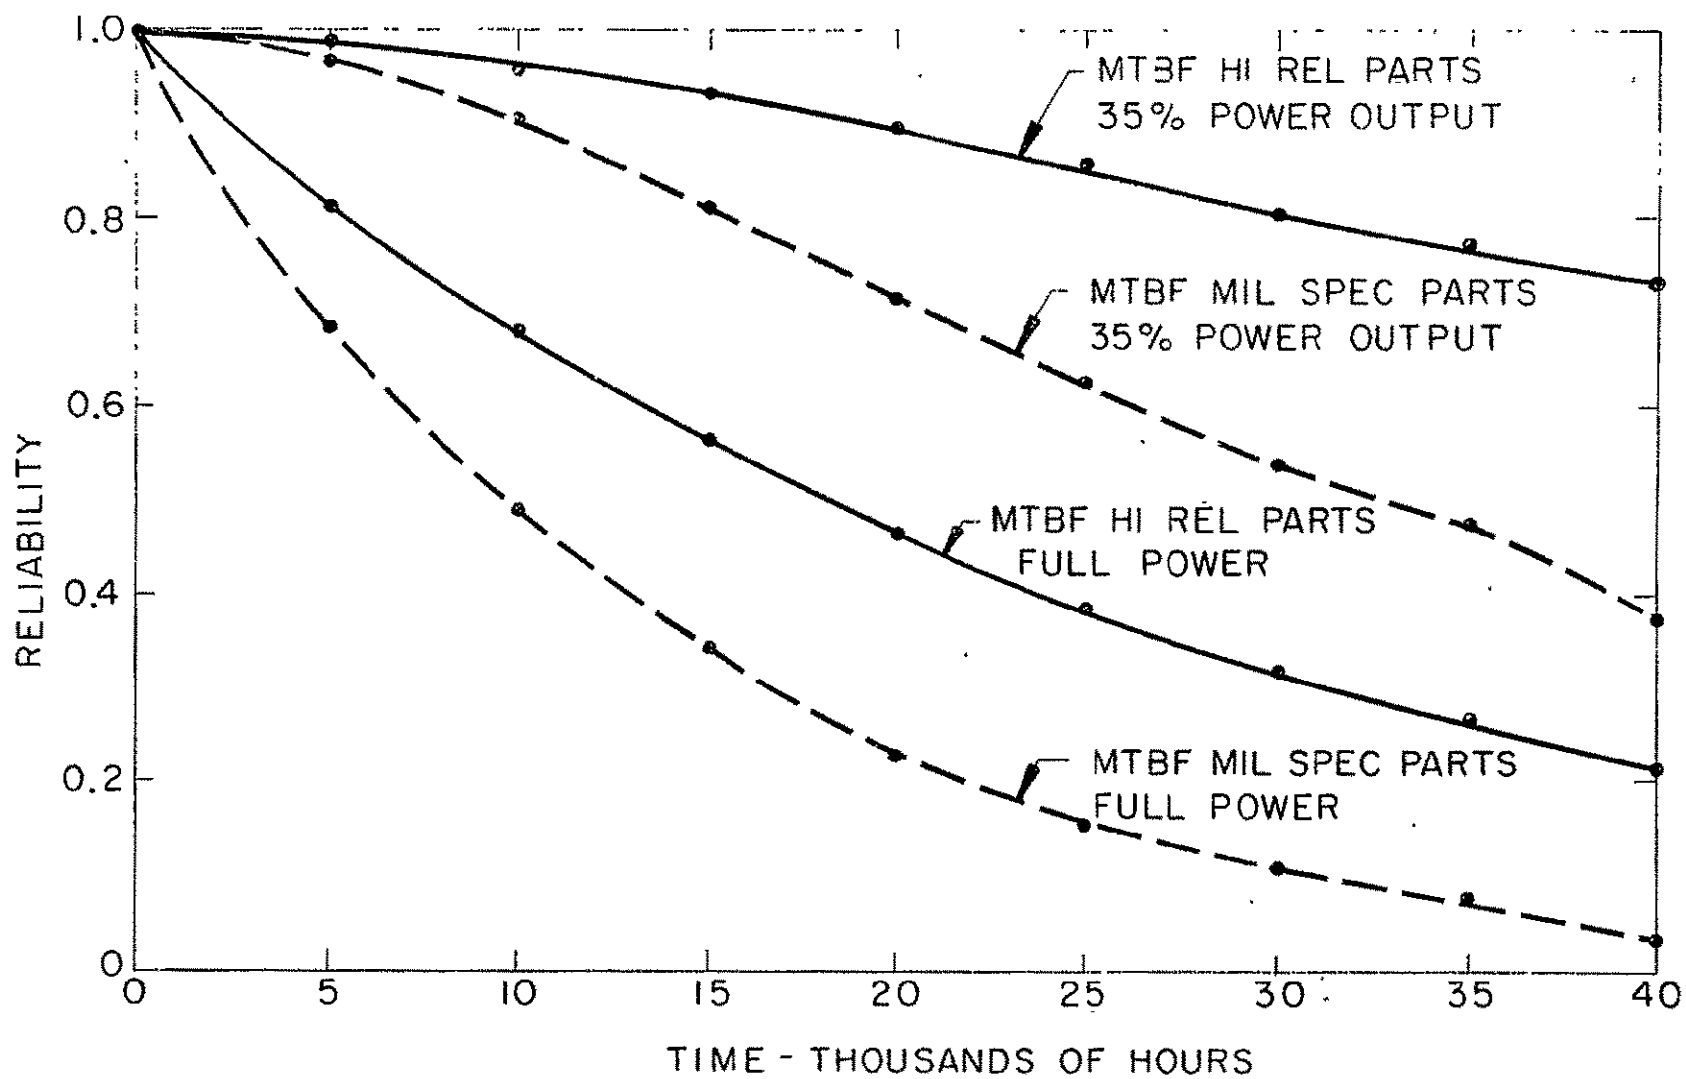


Figure II-9 Reliability as a function of time for MIL Spec parts and high reliability parts.

Hughes Electron Dynamics Division has accrued over 55,200 hours of life test operation on the cold cathode 3082H and 3083H He-Ne (CW) family of lasers. These data indicate to date a demonstrated MTBF of 27,600 hours with two failures. This statement of laser MTBF is only limited by the amount of data accrued to date. As little as ten months ago, Hughes Aircraft Company, Electron Dynamics Division had demonstrated for this family of He-Ne lasers of MTBF of 15,000 hours and was conservatively estimating the actual MTBF to be in the range of 25,000 hours. In the subsequent ten month period the Electron Dynamics Division had demonstrated the actual MTBF to be almost 2 times greater than demonstrated ten months ago. All this points up the rapidly changing state of the art and the rapidly increasing confidence in the He-Ne lasers built at the Electron Dynamics Division. As a comparison, the initial predicted levels for the Hughes medium power traveling-wave tubes were 20,000 hours MTBF based upon similar limited test data. Subsequent life tests have shown that these metal ceramic tubes exhibit an inherent MTBF of greater than 1.5 million hours.

Many of the techniques used in these high reliability space traveling-wave tubes are used in this metal ceramic He-Ne laser. For example, the Hughes metal ceramic seal techniques used in the space traveling-wave tubes will be used for the laser vacuum envelope. This type of vacuum seal has accrued over 1.5 million hours of failure free performance on such space programs as Surveyor, Syncom, ATS, Early Bird, Intelsat, Pioneer and Lunar Orbiter. Therefore, for this estimate the laser MTBF is conservatively estimated to be 50,000 hours.



The reliability parts count prediction for each power supply is contained in Table II-2. The reliability prediction for each power supply does not include the telemetry circuits. The telemetry portion of the laser and power supply is designed to be failsafe; i.e. failure of any telemetry point will not cause a catastrophic failure of the power supply or laser and therefore will not alter the mission success of the integrated power supply and laser.

Table II-2 Power supply parts count and failure rate data  
(one power supply).

| PART TYPE               | QTY | MIL SPEC<br>$\lambda/10^{-6}$ | HIGH RELIABILITY<br>$\lambda/10^{-6}$ |
|-------------------------|-----|-------------------------------|---------------------------------------|
| <u>Transistor</u>       |     |                               |                                       |
| NPN, Power              | 4   | 1.76                          | .4                                    |
| NPN, G.P.               | 1   | .56                           | .015                                  |
| NPN, G.P.               | 8   | 1.75                          | .304                                  |
| <u>Diode</u>            |     |                               |                                       |
| G.P.                    | 24  | 5.03                          | .120                                  |
| Hi Voltage              | 2   | .66                           | .036                                  |
| Power                   | 4   | 1.46                          | .072                                  |
| Zener                   | 3   | 1.64                          | .06                                   |
| <u>Resistors</u>        |     |                               |                                       |
| Metal Film              | 11  | 1.77                          | .027                                  |
| Power W-W               | 4   | .072                          | .032                                  |
| Carbon Corp.            | 16  | .064                          | .032                                  |
| <u>Capacitors</u>       |     |                               |                                       |
| Ceramic                 | 4   | .044                          | .004                                  |
| Solid Tant.             | 14  | .67                           | .067                                  |
| Feed Thru               | 2   | .4                            | .2                                    |
| <u>Magnets</u>          | 7   | 1.4                           | .14                                   |
| TOTAL $\lambda/10^{-6}$ |     | 17.55                         | 1.52                                  |

## SECTION III

### SPECIAL TESTS AND EVALUATIONS

There were several problem areas which existed at the end of Phase I of the present contract. The results of special tests which have been conducted to investigate these problems are documented in this section.

#### A. CATHODE STUDIES AND LIFE TESTS

A continuing company supported cold cathode lifetest program is the basis of the SQL cold cathode design. This program began almost three years ago at Hughes Research Laboratories. Early experiments were made with oxidized aluminum, following Hochuli<sup>1</sup> but this approach was abandoned in favor of oxidized tantalum also built as a hollow structure. Tantalum has more desirable properties as a vacuum tube material and the layer of  $Ta_2O_5$  formed by proper processing should, in theory, have even higher sputtering resistance than  $Al_2O_3$ , because of the higher heat of sublimation of  $Ta_2O_5$ .

The results of the initial cold cathode life tests for the dual bore design of the SQL discharge tube is discussed on page 46 of Appendix C.

These life tests, which were performed during Phase I of this program, all failed due to gas clean up caused by cathode sputtering. This problem was initially thought to be due to improper oxidation of the inside of the tantalum cathode in the area where the current density is the highest. More recent tests indicate that the sputtering problem is also associated with the cathode geometry. These tests were conducted on discharge tubes that differed only in cathode geometry. One tube, "A", was identical to SQL, Serial Number 2 and 6 except the cathode was processed by a method which insured proper oxidation of the inside surfaces.

The other tube, "B", had a dielectric septum in the center of the cathode between the two bores which causes an electric field configuration that insures a more uniform current density distribution... This cathode more nearly duplicates the conditions that exist in the 3082H cathode. Both tubes were initially filled to 1.5 torr. Tube "A" failed after 1187 hours, while tube "B" did not fail until it had operated 4120 hours. End of life was determined when the tube pressure reached 1.10 torr. The pressure versus time curve from tube "B" is shown in Figure III-1.

Hochuli<sup>2</sup> has shown that this pressure time curve can be approximated by

$$\frac{P}{P_0} = \left(1 - \frac{t}{\tau}\right)^{1/x}, \quad 0 \leq t \leq \tau$$

where  $\frac{P}{P_0}$  is the pressure at time  $t$  divided by the initial pressure. The exponent  $x$  and lifetime  $\tau$  for a given cathode material and surface treatment must be determined experimentally. These parameters were determined for tube "B" and are given in Figure III-1 along with the approximate possible time curve.

Once these parameters  $x$  and  $\tau$  are known we can determine, for the same cathode geometry, gas volume and current density, a new lifetime  $\tau_2$  for any initial pressure  $P_2$ . Doing this for an initial pressure of 2.0 torr, which is about optimum for the SQL, results in a pressure of 1.58 torr after 10,000 hours operation. Thus it would appear that the new cathode geometry will be capable of lifetimes in excess of the 10,000 hour requirement.

This extrapolation is substantiated by the life test results thus far obtained for the metal ceramic prototype discharge tube number 1 which has operated over 5500 hours and is still operating. This cathode design, shown in Figure II-2 of Appendix C, is basically the same as tube "A"

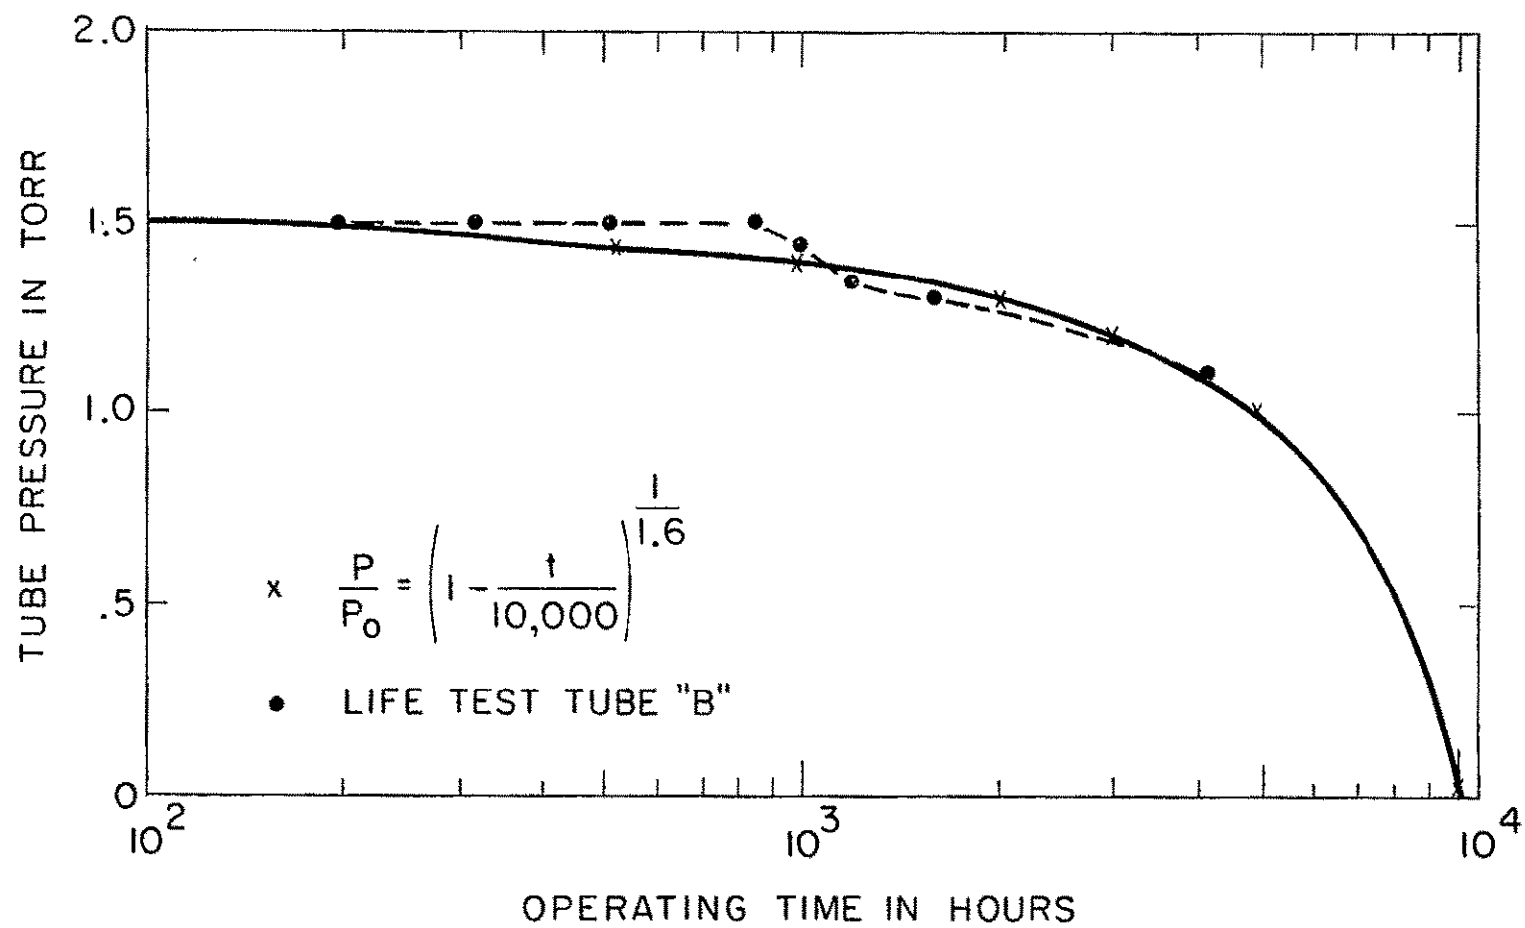


Figure III-1 Cathode geometry evaluation lifetest data.

except it is 1.8 inches in diameter whereas tube "A" was only 1.4 inches. The higher cathode current density results in a lower expected lifetime  $\tau$ . The new cathode geometry for the SQL should therefore be much superior to that used in prototype discharge tube number 1 since the cathode diameters are the same.

Lifetests are continuing on Hughes Model 3082H tubes which are being manufactured for Keuffel and Esser Company for use in an alignment laser, see Table III-2, page 49 of Appendix C. Tube numbers 5, 25, and 27 are still operating of 14,740, 7,827 and 8,853 hours respectively. Number 43 failed after only 950 hours due to a vacuum leak. These results again demonstrate the long life capability of this cold cathode design.

#### B. MIRROR STUDIES

An extensive mirror evaluation program was conducted during Phase I of this contract. The results of this program are presented in Section III-G of Appendix C. In so far as this evaluation was conducted on an external mirror laser, additional tests were required to determine if any problems existed when these same mirror coatings were used internally.

During Phase I a discharge tube, shown in Figure III-2, was constructed with a split bore, common cathode and two anodes. Bellows were attached to the anodes and mirrors were then epoxied to the bellows. The results of these tests are shown in Figure III-3. The results from an identical tube which had Brewster windows and external mirrors is shown in Figure III-4. Thus it was determined that both Optical Coating Labs and Spectra-Physics mirror coatings yielded equivalent results when used internally and substantially more power than was obtained externally.

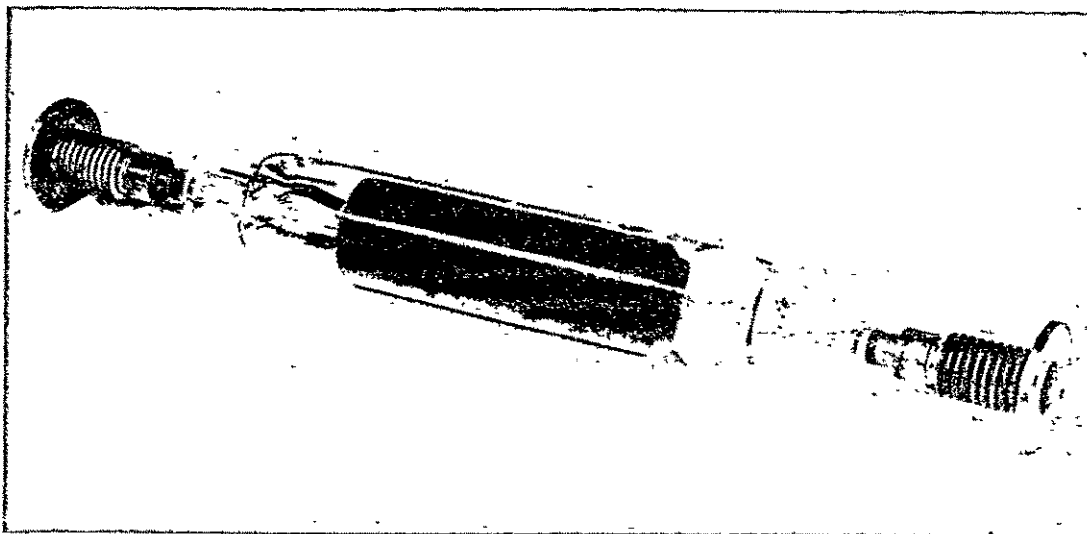


Figure III-2 Glass tube used for internal mirror tests.

Internal mirror lifetests were started to investigate the possibility of long term mirror coating deterioration. Two glass laser discharge tubes were constructed with a pre-aligned flat high reflecting mirror epoxied on one end and a Brewster angle window on the other end. This design makes possible the use of various external output mirrors which can be readily adjusted. The high reflecting flats were obtained from Optical Coating Labs and Spectra Physics to compare the two different coatings. Both lasers have been running for over 5300 hours with no signs of deterioration and both have essentially the same output power as a comparable external mirror laser. These mirrors are epoxied near the anode of the tube at approximately the same distance as in the SQL design. This is to insure the detection of any mirror degradation due to the deposition of sputtered anode material or particle bombardment that could occur in the SQL design.

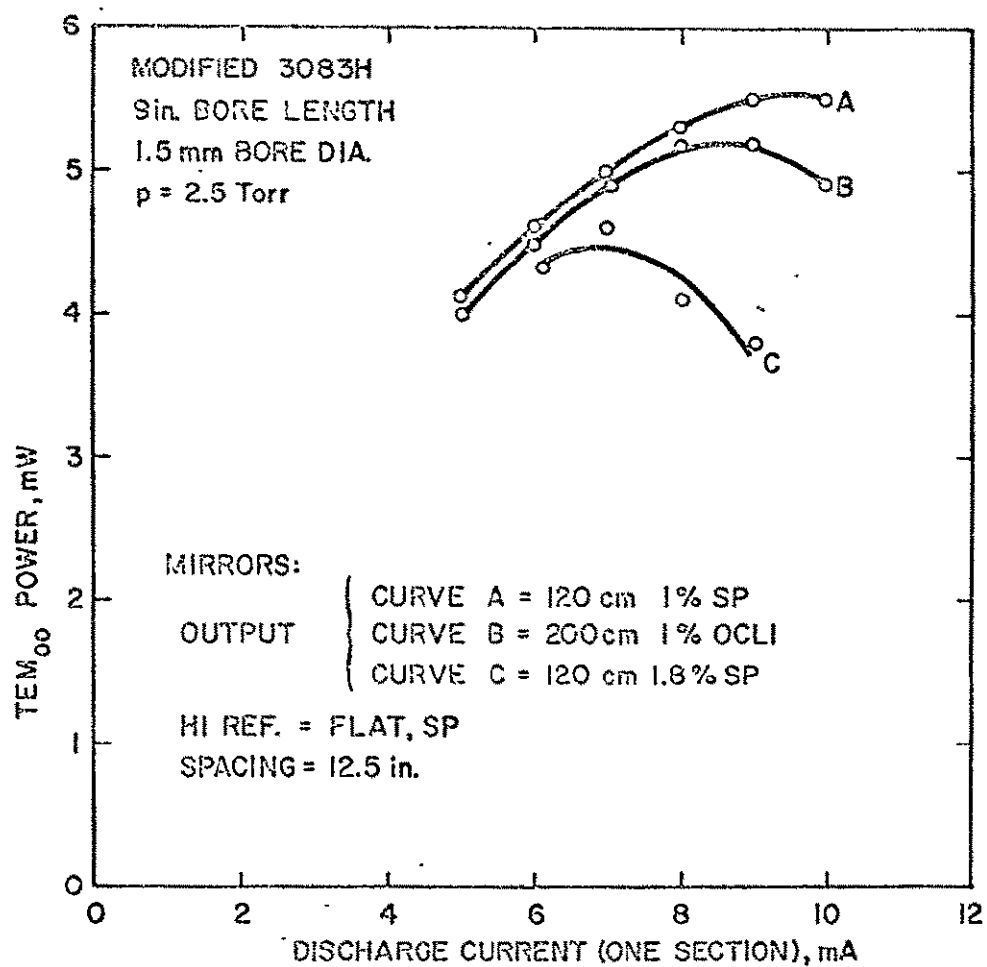


Figure III-3 Measured TEM<sub>00</sub> power output for a short (9 in.) bore 3083H with different radius internal mirrors.

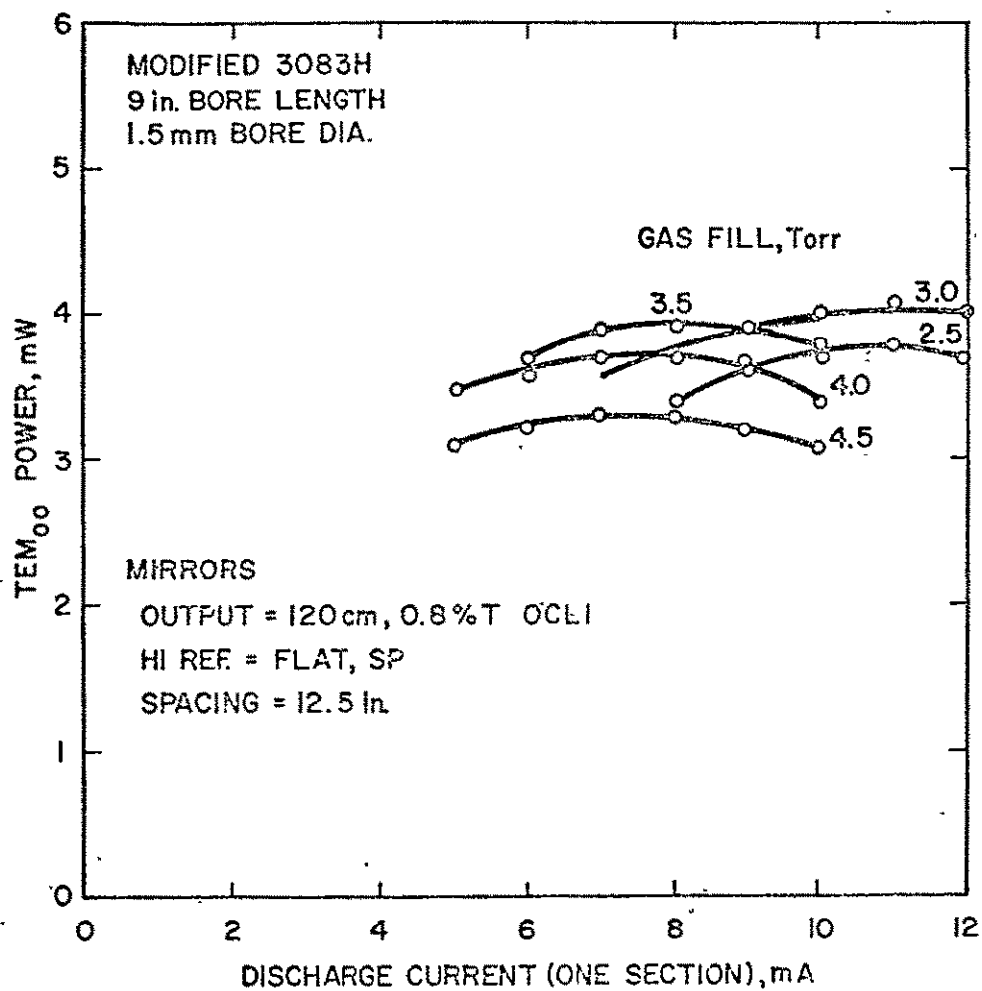


Figure III-4 Measured TEM<sub>00</sub> power output for a short (9 in.) bore 3083H with external mirrors.



### C. MIRROR AND WINDOW SEALS

During Phase I a method was worked out for sealing the output mirror onto the laser without the need for epoxy or other cement. This technique is described in Section III-4 of Appendix B.

Upon careful inspection of these glass to metal mirrors fabricated and coated during the initial phase of the program, small vacuum leaks were found in the glass to metal interface. Since the leaks were not discovered until after the mirrors were heliarced to the discharge tube they were initially thought to be caused by thermal stresses set up during heliarcing. However, careful helium leak checking revealed leaks in all the glass to metal mirrors fabricated. These glass to metal mirrors apparently did not leak before grinding, polishing, and coating. Therefore it is believed that these operations may have been the cause of the problem. The reliability of any part of the SQL design should be proven wherever possible. Thus the glass to metal mirrors were dropped in favor of a somewhat space consuming but much more reliable design.

This alternate design, shown in Figure III-5, employs an internal output mirror coated on a fused quartz substrate which will be mechanically mounted. The output beam passes from this mirror through a more conventional optical flat output window. The output window is sealed to a short section of glass tubing which is sealed to a Kovar heliarc flange. This technique is quite straight forward and these seals have proven to be very reliable and are widely used in vacuum viewing ports. Several of the output window assemblies have been fabricated with no problems. The central 3/8 inch aperture remains free of distortion after sealing. A heliarc weld test has been performed on one assembly. This unit shown in Figure III-6 was then subjected to a typical bakeout temperature cycle (ambient to 450°C for 24 hours and back to ambient). The assembly was still leak tight after these tests.

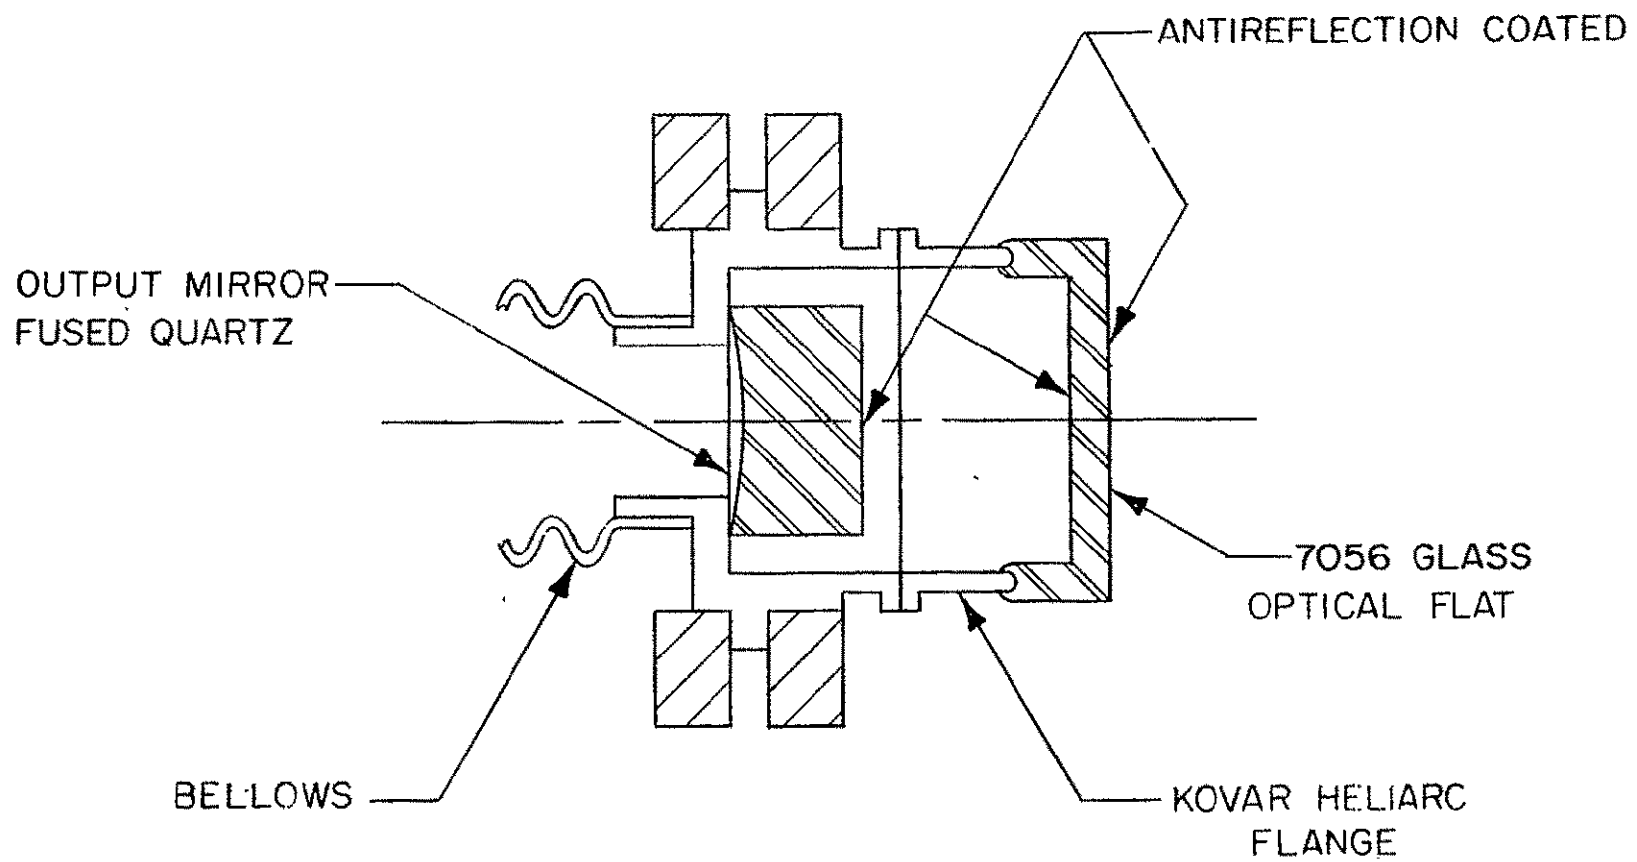


Figure III-5 Output mirror and window design.

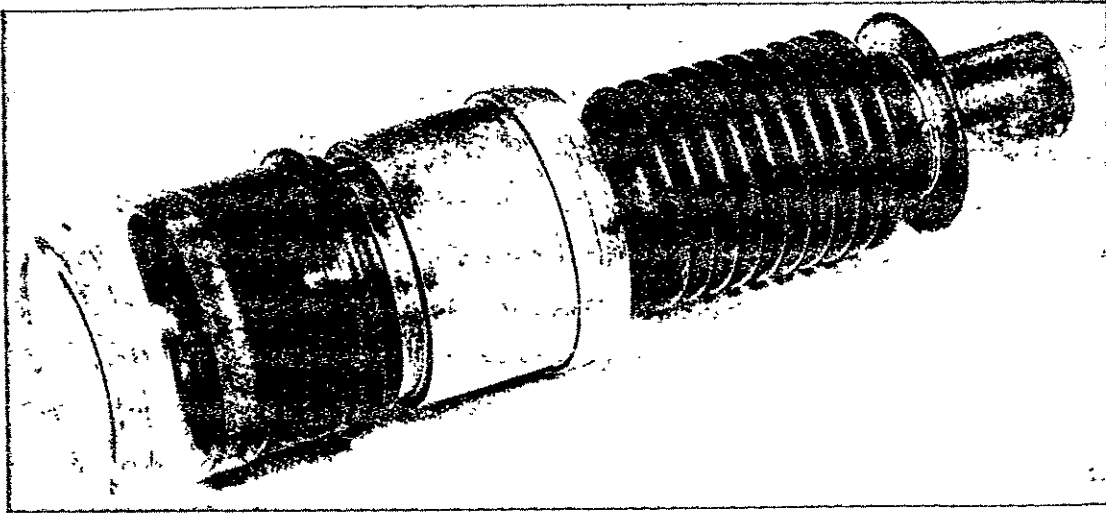


Figure III-6 Output window test assembly..

There are no problems associated with putting an antireflection coating on the outside surface of this window assembly.. Since the inside surface is somewhat masked by the kovar flange this may present a problem.. However, a maximum reflection of 1.0% total for both surfaces (over a  $3/8$  inch aperture) seems achievable.. These AR coatings have been tested by the manufacturer and are not degraded by the bakeout temperature..

#### D. ENVIRONMENTAL TESTING

Two prototype metal ceramic laser discharge tubes of the design shown in Figure II-2 of Appendix C were constructed during Phase I of this program. The second of these units, prototype discharge tube number 2, was processed and packaged. This laser was then subjected to the sinusoidal vibration test per page 96 in Appendix C. A resonance was noted at 1100 Hz and the forces measured on the ends of the mirror support cylinder reached 120 g's. Although the unit did not suffer permanent failure, the mirrors did misalign. This was determined to be due to movement of the mirror support ((19) of Figure II-2, Appendix C) which was held by four screws to the mirror support cylinder. In the modified design shown in Figure II-1 the mirror support is held in place by a threaded retainer ring which should prevent any movement. It is also instructive to note that the resonant frequency of the mirror support cylinder, which is proportional to  $(E/\rho)^{1/2}$  where E is the modulus of elasticity and  $\rho$  the density, would have been approximately 2800 Hz had it been made of beryllium rather than aluminum. Thus the resonance noted would have been above the 5 to 2000 Hz frequency range of the test and since the modified design is shorter the resonance will be well above this range.

This unit was also subjected to part of the shock test per page 96 of Appendix C. It was shocked three times in each of the two axes mutually perpendicular to the long axes. Again the only problem was misaligned mirrors due to movement of the mirror support. Since an expensive fixture would have been required for shock testing this unit along the long axis it did not seem feasible to conduct the test but rather to wait and test the modified design later in the program.

#### E. DISCHARGE TUBE NUMBER ONE

The first discharge tube of the modified design (Figure II-1) has been constructed and tested. No problems were encountered in the fabrication of the various subassemblies. The time required during final assembly to align the two ceramic bores was greater than anticipated. This can be rectified in future construction with proper fixturing.

The tube was then placed in a vacuum bakeout station. It was baked out at 350°C maximum for approximately 20 hours. The tube was pumped with a vac-ion pump system during bakeout.

After bakeout the tube was valved off under vacuum and placed in a test cavity support structure. It was then connected to an oil diffusion pump vacuum station for back filling and testing.

The discharge was extremely clean and free of contamination but all efforts to get lasing action failed. The prism was then removed by grinding down the heliarc weld flanges and replaced with a high reflectance flat mirror which was epoxied in place. Lasing action was obtained but the output power was low; the best obtained was only 1.7 mW. Both mirrors were then removed and upon careful inspection the output mirror was found to be crazed, apparently from the temperature cycling during bakeout. The prism coating which had also gone through the bakeout appeared to be unaltered. Both the mirror and prism were checked in an external mirror laser, the prism was unchanged (both were tested in this manner before the tube was assembled) but the output mirror appeared lossy, apparently due to the crazed coating. The output mirror had been coated by Optical Coating Labs and the prism by Spectra-Physics. It is interesting to note that OCLI coats with a substrate temperature of 300°C while SP uses 350°C. As we reported previously, except for this crazing problem, both of these manufacturers' mirrors have been evaluated

and determined to be of equal quality. Although the lossy output mirror, which was crazed, explains the low power it does not explain the non-lasing seen when the prism was used. This problem was apparently due to difficulties experienced in mirror alignment when a prism is used.

Spectra-Physics mirrors were then epoxied on discharge tube number 1. An output power of 4.8 mW was obtained. This was in the  $TEM_{01}$  trans-mode due to the use of a 120 cm radius output mirror selected because it was a stock item and readily available from SP. Although slightly less power would be expected in the  $TEM_{00}$  mode, the above data was taken with  $He^4$  rather than  $He^3$  and between 10% and 20% more power can be expected with the  $He^3$  isotope.

The flat high reflectance mirror was then removed and replaced by a Brewster's angle prism. This was epoxied to an extension that increased the mirror spacing by 1.0 cm. Data taken with  $He^3$  isotope is shown in Figure III-7. This appears to be almost all  $TEM_{00}$  as shown in Figure III-8, which is a sketch of the laser output modes observed with a Spectra-Physics Model 420 optical spectrum analyzer.

Plans call for this laser to be subjected to environmental testing in order to verify the modified mirror support design.

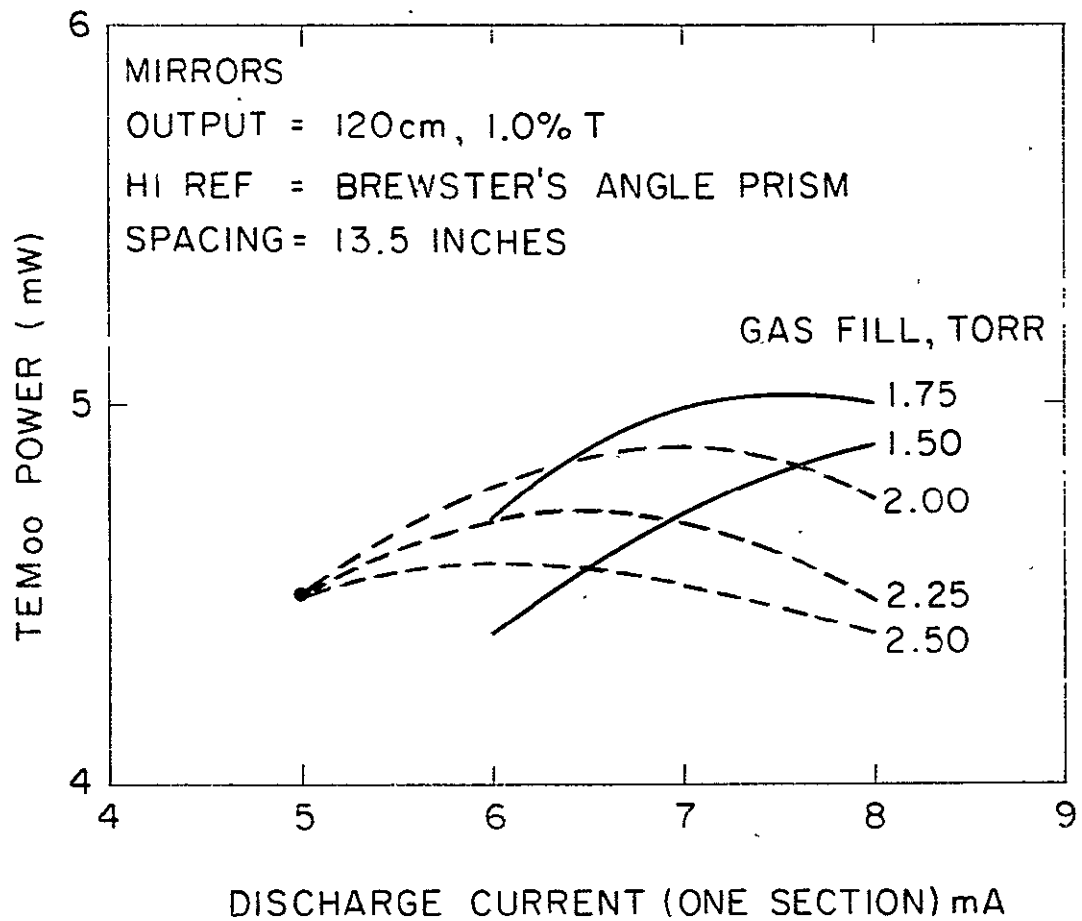


Figure III-7 Measured TEM<sub>00</sub> power output for discharge tube number one.

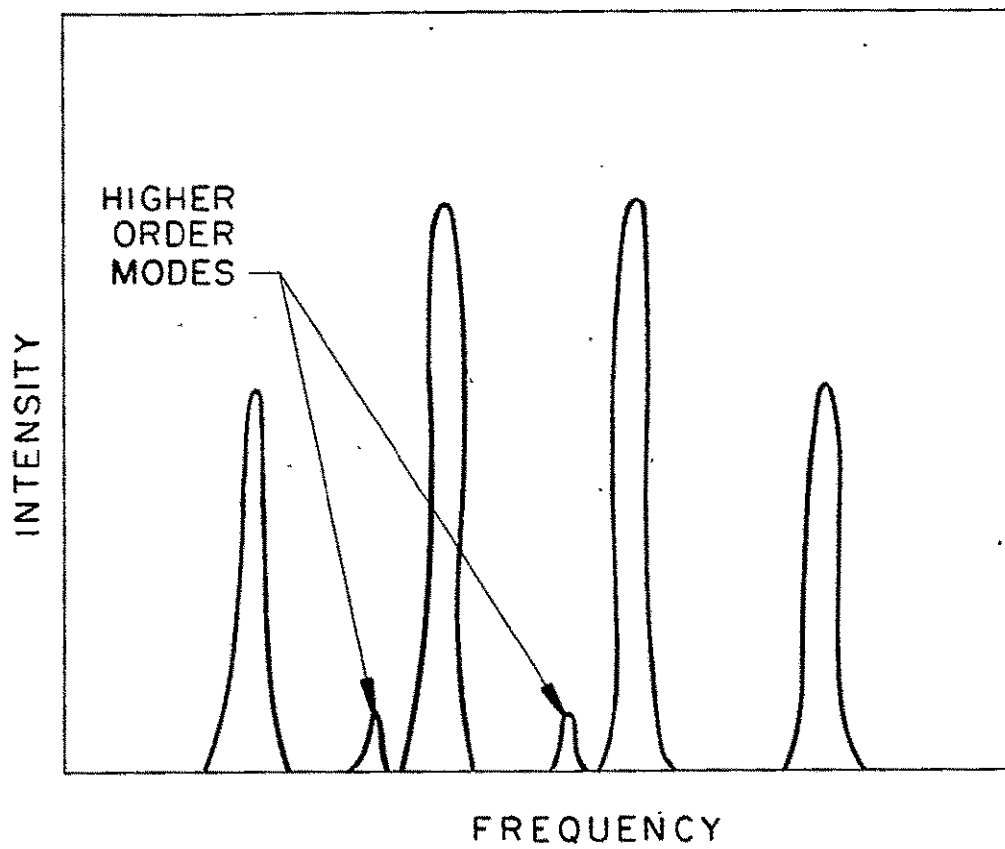


Figure III-8 Sketch of output modes observed with optical spectrum analyzer.



## SECTION IV

### PLANS FOR THE COMPLETION OF THE PROGRAM

The remainder of the program is essentially the fabrication and testing phase for the final units. Two units are now being constructed. These units will be subjected to the Qualification Reliability Test Plan (pages 91 - 98 of Appendix C). Special tests and evaluations will be continued until completion.

#### REFERENCES

1. U. Hochuli and P. Haldemann, "Cold Cathodes for Possible use in 6328 Å Single Mode He-Ne Gas Lasers," Rev. Sci Instr. 36, 1493 (1965).
2. U. Hochuli, P. Haldemann, and D. Hardwich, "Cold Cathodes for He-Ne Gas Lasers," presented at 1967 IEEE Conference on Laser Engineering and Applications, Washington, D. C., June 1967.

## APPENDIX A

### NEW TECHNOLOGY

After a diligent review of the work performed under this contract, no new innovation, discovery, improvement or invention was made.

## APPENDIX B

### SPECIFICATIONS FOR SPACE QUALIFIED LASER (He-Ne), PHASE II

#### GENERAL

The work under Space Qualified Laser (He-Ne), Phase II is intended to initiate and carry to completion development work on a laser design reported in Hughes "Design for a Space Qualified Laser - Oral Presentation Data" (SQLOP) of February 1968.

The laser designation shall be Model 3072H He-Ne Laser.

The Model 3072H He-Ne Laser is to be of metal-ceramic construction mounted integrally with the solid state power supply. Cooling is to be accomplished by conduction to a heat sink through one surface of the package. The optical output is to be accurately referenced to one edge of the package to provide alignment during installation. The laser is to use a cold cathode and internal mirrors. Two separate power supplies and laser discharge structures are to be provided for redundancy and to allow operation at approximately one-third power output upon command. Seven active telemetry outputs and their associated transducers are to be provided.

The development work will conform to the SQLOP design unless otherwise noted herein. No changes or deviations of any significance are to be made without prior approval of the contract technical monitor. It is the desire of NASA/ERC that problem areas be promptly brought to its attention in order to fully utilize the combined resources of the two organizations in problem solutions.

MIL Spec Electronic or equivalent parts are to be used in this phase with the exception of magnetics.

The funds provided for documentation purposes are intended mainly to support direct laser and power supply exigencies. The major portion certainly should go for Process Specification, Process Instruction, and Assembly Instruction documentation.

The laser plasma tubes built in this phase shall be assembled in a Class 100,000 clean room as defined in NASA and MIL Specs.

The parts and materials used will conform to the list below unless during the development phase other components are found to be more reliable or to provide a simpler, better overall laser package. NASA concurrence of such changes must be obtained from the contract technical monitor.

- High Alumina Ceramic Bore
- Stainless Steel 327, 302, and 304
- Kovar
- Vacuum Melted Iron
- OFHC Copper
- Tantalum
- Beryllium
- Nickel Grade A
- Tantalloy
- Fused Quartz
- Gold-Copper Braze Alloy
- Corning 7052 Glass
- Aluminum
- Dow Chemical Sylgard 185 (Potting Material)
- Barium Getter
- Helium Gas
- Neon Gas
- Space Qualified Black Paint
- Electrical Components

The desired reliability for the specified three year laser life shall be 85% or greater, although recognizing that MIL Spec. parts are used in this phase for reasons of economy. The 85% figure is a projected one for a later phase when the combination of a fully proven laser head is integrated with a power supply incorporating high reliability parts. The design and selection of components shall be governed by this requirement. A recalculation of the expected reliability shall be made for the Interim Scientific Report and again for the final Design Review.

The provisions of NASA Contract NAS 12-579 modification document of February 19, 1968, submitted by L. J. Smith of Hughes shall apply to this phase except as noted herein.

The contractor shall exercise adequate Quality Assurance requirements and maintain Quality Control to the degree required for this development program. Parts, materials and assemblies shall receive adequate inspection and test. For the follow-on contract qualification phase the contractor's selected procurement sources should be able to comply with applicable requirements on NPC-200-2-3 and the contractor and his suppliers are subject to evaluation, review, and inspection by NASA/ERC or its designated representatives to determine that:

- a. The Quality Assurance and Control continuously meets contractual requirements.
- b. Articles, materials, and related services satisfy contractual requirements and are of satisfactory quality to meet the intended design.

A system shall be incorporated to ensure control of documents affecting the design, reliability, and overall quality and for the incorporation of changes in such documents. These documents include engineering drawings, specifications and procedures, QA and test control, and similar documents.

#### OPTO-ELECTRICAL SPECIFICATIONS

1. To operate at  $6328 \text{ \AA}$  with He-Ne.
2. To operate in a single transverse mode,  $\text{TEM}_{00q} \text{ TEM}_{00q} + j$ .
3. To operate at an initial output power level not less than five (5) milliwatts, CW. Measurement point to be outside of laser package.
4. The operating/shelf life shall be three (3) years as a design objective, the operating portion of which shall be not less than 10,000 hours. The output power shall not drop below 3 mW at 7000 hours operating time and 2 mW at 10,000 hours operating time. These values shall be attained for any combination of operating/shelf times.
5. To operate a polarized output, linear to one part in 1000. The plane of polarization shall be specified to within one (1) degree.
6. To operate with a beam diameter not greater than two (2) millimeters as measured to the  $1/e^2$  points, at a location 2" from the output aperture. The beam shall be essentially parallel at this location.
7. To operate with a beam divergence consistent with the diffraction limit for gaussian or modified gaussian beams of the selected beam diameter. The beam is to be round.
8. To operate with no detectable lasing at the  $3.39 \text{ \mu}$  and  $1.15 \text{ \mu}$  wavelengths.
9. To operate without liquid cooling.

10. To operate within a light-tight enclosure except for an exit window. Spontaneous radiation from laser to be minimized (by apertures, window coating, etc.)
11. To provide a design analysis of magnetic field leakage. Ten gammas or less magnetic field at any point more than 6 inches from the case will be a design objective.
12. To operate normally in space vacuum environments after rocket launch.
13. To operate with a minimum angular deviation of the beam axis as a function of temperature, time, vehicle spin, laser age, magnetic fields, etc. A single mission deviation of less than two (2) arc-seconds is desired.
14. To operate with a minimum of discharge and mode noise in the output radiation. An rms noise level of .3% and 5 mW as measured in a 0 - 3 MHz frequency range with a 1 KC bandwidth is provisionally acceptable.

#### PHYSICAL SPECIFICATIONS

1. The laser, its power supply, the power monitor, the telemetry transducer, etc., will all be integrated into a single metal-body case or package. This package shall be approximately 16" X 5" X 5" in dimensions, exclusive of any necessary protuberation for input/output connections. The case shall be pressurized at approximately one (1) atmosphere with dry He gas. The center of gravity (C of G) shall be as low as possible, and its location shall be approximately specified on a suitable drawing. The total target weight will be ten (10) pounds.



2. The laser output beam will be parallel to within ten (10) seconds of the nearest long edge of the case and will be some predetermined distance from it to within 0.002" in both X and Y axes.
3. The case is intended to mount to a flat heat sink on one 16" X 5" surface, and means for accomplishing this will be provided. This surface must allow for metal-to-metal contact. All other major surfaces should be made black by painting or anodizing.
4. A set of three (3) or four (4) tapered holes is to be provided and disposed symmetrically about the laser beam axis on the 5" X 5" end plate, for mounting auxiliary optical equipment as needed. A standard diameter and tap size shall be used if a standard exists; otherwise the base circle diameter can be 2.5".
5. The case cover shall be sealed by "O" rings or other semi-permanent means. The sealing method must be compatible with the lifetime requirements.
6. The materials used must be compatible with NASA requirements for Manned and Unmanned space flights.

#### INPUT-OUTPUT SPECIFICATIONS

1. The laser will operate normally for supply voltages in the range of 24 - 32 VDC and over a base plate temperature range of  $-10^{\circ}\text{C}$  +  $50^{\circ}\text{C}$  in any combination.
2. The power drain will not exceed 33 W for any condition of temperature, laser age, etc.

3. The laser turn-on period will be shorter than ten (10) seconds. Both "semi-lasers" are to be simultaneously or sequential start-able.
4. The current drain in the laser "OFF" situation is to be less than 5 mA, exclusive of the telemetry drain.
5. The power supply design, insofar as possible, must provide against catastrophic bus drain due to failure of any component.
6. A total of nine telemetry outputs shall be provided for; these are the seven (7) listed on page 95 of SQLOP and two (2) spare positions. The interface connectors to the case exterior will conform to NASA telemetry usage.

#### APPLICABLE DOCUMENTS

The following documents of the revision in effect on the date of issue of this exhibit are applicable to the extent specified herein. Should conflicting requirements exist, the requirements listed in other paragraphs in Exhibit A and Exhibit B shall govern. Documents listed here but not specified elsewhere shall be used for information only in program planning and documentation.

1. MIL-STD-810 - Environmental Test Methods for Aerospace and Ground Equipment.
2. MIL-I-6181 - Electromagnetic Interference Requirements and Test Levels.
3. NPC-200-4 - NASA Requirements for Soldering of Electrical Connections.

4. MIL-STD-785 - Requirements for Reliability Programs.
5. NPC-200-3 - Inspection System Provisions.
6. MIL-W-5008 - Wiring.
7. MIL-STD-202 - Test Methods for Electronic and Electrical Components.
8. MIL-STD-781 - Reliability Test and Exponential Distribution.
9. MIL Handbook-217A - Reliability Stress and Failure Rate Data for Electronic Equipment.
10. NASA-RA-006-013-1A - Procedure for Failure Mode, Effect, and Criticality Analysis.

#### ENVIRONMENTAL SPECIFICATIONS

For the purposes of testing any assembly, part, substructure or complete package the following environmental conditions shall prevail. When a sequence of tests is to be performed, the ordering of page 94 of SQLOP shall be used. The Group I tests will be performed as developmental tests. All tests will not necessarily be performed on the same unit.

##### Group 1

1. Sinusoidal Vibration: As on page 96 of SQLOP except that, whenever possible the laser shall be energized to aid in determination of any failure point as evidenced by loss of radiation.
2. Random Vibration: As on page 96 of SQLOP with same qualification as above.

3. Shock: As on page 96 of SQLOP.
4. Temperature Cycling: As on page 96 of SQLOP.
5. Acceleration: As on page 96 of SQLOP.
6. Thermal-Vacuum: As on page 97, item 6.2 of SQLOP except that lower temperature shall be  $-10^{\circ}\text{C}$ .

It is expected that the laser package will have been exposed to and can fully meet these (Group 1) environmental specifications at the end of Phase II work.

#### Group 2

1. Acoustical Noise: Per the profile outlined below 1/3 octave band acoustical specification  $P_c 2 \times 10^{-4}$  Dynes/cm<sup>2</sup>. Test duration - three minutes minimum.

| <u>1/3 Octave Band<br/>Geom. Mean Freq. (cps)</u> | <u>dB Level</u> |
|---|-----------------|
| 5.0   | 138.5           |
| 6.3   | 140.0           |
| 10.0  | 142.5           |
| 25.0  | 146.0           |
| 40 - 60   | 146.0           |
| 100   | 143.0           |
| 160   | 136.0           |
| 200   | 132.5           |
| 250   | 130             |
| 500   | 121             |
| 1000  | 112             |
| 1600  | 105.5           |

|       |       |
|-------|-------|
| 2000  | 102.5 |
| 3150  | 95.5  |
| 4000  | 92.0  |
| 5000  | 89.0  |
| 6300  | 85.0  |
| 8000  | 81.0  |
| 10000 | 78.0  |

Overall 156.5 + 4 dB  
- 0 dB

1/3 octave band sound pressure levels + 4 dB  
- 0 dB

2. Humidity: Ten days of accelerated humidity.
3. Oxygen Atmosphere: The equipment shall be capable of operating in a pure oxygen atmosphere at 5 psia pressure.
4. Explosive Atmosphere Test: Per MIL-STD-810A.
5. Electromagnetic Compatibility: In accordance with MIL-I-6181.

These Group 2 tests shall be regarded as design objectives, to the end that the laser package may ultimately be subjected to any or all of these. The contractor is required to become familiar with these tests and provide at the contract oral review his best estimate of the laser package performance thereunder.

APPENDIX C

DESIGN FOR A SPACE QUALIFIED LASER  
ORAL PRESENTATION DATA

Prepared by:

W. B. Bridges

Hughes Research Laboratories  
Division of Hughes Aircraft  
Malibu, California

DESIGN FOR A SPACE QUALIFIED LASER —  
ORAL PRESENTATION DATA

Contract No. NAS 12-579

February 1968

Prepared by

Hughes Research Laboratories  
Division of Hughes Aircraft Company  
Malibu, California

## TABLE OF CONTENTS

|      |  |    |
|------|--|----|
|      | LIST OF ILLUSTRATIONS . . . . .  | v  |
| I.   | INTRODUCTION . . . . .   | 1  |
| II.  | SPACE-QUALIFIED LASER DESIGN . . . . .   | 5  |
|      | A. Metal-Ceramic Tube Design . . . . .   | 6  |
|      | B. Optical Cavity Support Structure<br>Design . . . . .                              | 12 |
|      | C. Package Design . . . . .  | 15 |
|      | D. Power Supply Design . . . . .   | 20 |
|      | E. Reliability and Quality Assurance<br>Provisions, Phase II . . . . .               | 25 |
| III. | PHASE I SUBTASKS . . . . .   | 27 |
|      | A. Calculation of Critical Laser Design<br>Parameters . . . . .                      | 27 |
|      | B. Measurement of Critical Laser Design<br>Parameters . . . . .                      | 34 |
|      | C. Literature Review and State-of-the-Art<br>Summary . . . . .                       | 38 |
|      | D. Summary of Visits to NASA Facilities . . . . .                                    | 42 |
|      | E. Contacts with Non-NASA Personnel . . . . .  | 45 |
|      | F. Life Tests and Cathode Studies . . . . .  | 46 |
|      | G. Mirror Measurements and Fabrication<br>Techniques . . . . .                       | 49 |
|      | H. Power Supply Tests Results . . . . .  | 55 |
|      | I. Prototype Laser Unit . . . . .  | 59 |
|      | J. Reliability Prediction and Stress Analysis<br>for 3072H Laser . . . . .           | 68 |
|      | REFERENCES . . . . .   | 89 |
|      | APPENDIX A -- Qualification-Reliability Test<br>Plan, 3072H Space Qualified<br>Laser |    |
|      | APPENDIX B -- Reliability Program, Phase II,<br>3072H Space Qualified Laser          |    |
|      | APPENDIX C -- HAC/EDD Quality Assurance<br>System                                    |    |



PRECEDING PAGE BLANK NOT FILMED.

# LIST OF ILLUSTRATIONS

|             |   |    |
|-------------|---|----|
| Fig. II-1.  | Photograph of completed metal-ceramic tube . . . . .  | 7  |
| Fig. II-2.  | Metal-ceramic tube cross sectional view . . . . .   | 8  |
| Fig. II-3.  | Proposed composite mirror support structure . . . . .   | 13 |
| Fig. II-4.  | Over-all view of cavity support structure and mounting bracket for 3072H laser . . . . .                | 16 |
| Fig. II-5.  | Package arrangement alternative 1 . . . . .   | 18 |
| Fig. II-6.  | Package arrangement alternative 2 . . . . .   | 19 |
| Fig. II-7.  | View showing package mounting flange and alignment edge . . . . .                                       | 21 |
| Fig. II-8.  | Block diagram of SQL power supply . . . . .   | 23 |
| Fig. III-1. | Power output as a function of loss parameter $\alpha$ for a 12 in. tube length . . . . .                | 30 |
| Fig. III-2. | Optimum mirror transmission as a function of loss parameter $\alpha$ for a 12 in. tube length . . . . . | 31 |
| Fig. III-3. | Power output as a function of loss parameter $\alpha$ for a 9 in. tube length . . . . .                 | 32 |
| Fig. III-4. | Optimum mirror transmission as a function of loss parameter $\alpha$ for a 9 in. tube length . . . . .  | 33 |
| Fig. III-5. | Measured power output as a function of discharge current for a 3083H glass tube (No. 1) . . . . .       | 35 |
| Fig. III-6. | Measured power output as a function of discharge current for a 3083H glass tube (No. 2) . . . . .       | 36 |
| Fig. III-7. | Measured output power for $TEM_{00}$ , $TEM_{01}^*$ , $TEM_{10}$ modes for tube 3083H (No. 1) . . . . . | 37 |
| Fig. III-8. | Measured $TEM_{00}$ power output for a short (9 in.) bore 3083H . . . . .                               | 39 |

|              |   |    |
|--------------|---|----|
| Fig. III-9.  | Measured TEM <sub>00</sub> power output for a short (9 in.) bore 3083H with different radius mirrors . . . . .        | 40 |
| Fig. III-10. | Measured TEM <sub>00</sub> output from a short (9 in.) bore 3083H at 0.63 $\mu$ , 1.15 $\mu$ , and 3.39 $\mu$ . . . . | 41 |
| Fig. III-11. | Hughes Model 3082H discharge tube . . . . .   | 47 |
| Fig. III-12. | Hughes Model 3083H discharge tube . . . . .   | 48 |
| Fig. III-13. | Output power as a function of mirror transmission (tube SQL S/N 1) . . . . .  | 52 |
| Fig. III-14. | Mirror test laser used at beginning of program . . . . .  | 53 |
| Fig. III-15. | Relative output for several mirrors and coated Brewster angle half-prisms . . . . .                                   | 54 |
| Fig. III-16. | Cross section sketch and photograph of metal-to-metal mirror developed under present program . . . . .                | 56 |
| Fig. III-17. | Fixture to test welding procedures and vacuum properties of metal-to-metal mirrors . . . . .                          | 57 |
| Fig. III-18. | Cross sectional view of alternative mirror sealing technique using a compressed metal V-ring . . . . .                | 58 |
| Fig. III-19. | Load current variation for input line voltages in the range 24 to 32 V dc . . . . .                                   | 60 |
| Fig. III-20. | Load current variations for load resistances in the range 130 k $\Omega$ to 160 k $\Omega$ . . . . .                  | 61 |
| Fig. III-21. | Load current variations for temperatures in the range -20 to +50°C with a resistive load . . . . .                    | 62 |
| Fig. III-22. | Load current variations for temperatures in the range -20 to +50°C with a 3083H laser as load . . . . .               | 63 |

|              |   |    |
|--------------|---|----|
| Fig. III-23. | Photograph of prototype SQL demonstration unit . . . . .  | 64 |
| Fig. III-24. | Photograph of prototype SQL interior showing laser mirror support structure and power supply circuit boards . . . . . | 65 |
| Fig. III-25. | Dimensions of prototype unit . . . . .  | 66 |
| Fig. III-26. | Reliability diagram, degraded mode 2 operation . . . . .  | 69 |
| Fig. III-27. | Reliability as a function of time for Mil Spec parts and High Reliability parts . . . . .                             | 71 |

## SECTION I

### INTRODUCTION

This document summarizes work performed by the Hughes Aircraft Company, Research Laboratories and Electron Devices Divisions, for the National Aeronautics and Space Administration under Contract NAS 12-579, "Research Directed Toward Perfecting a Design for a Space-Qualified Laser." It is intended to cover, in outline form, the pertinent data presented verbally by Hughes personnel to NASA/ERC personnel at Cambridge, Massachusetts, on 1 February 1968.

The objectives of this program are best set forth in the Statement of Work:

"The Contractor shall supply the necessary personnel, facilities, services, and materials to accomplish the work as set forth below:

ITEM 1: Perfect a design for a space-qualified laser in accordance with the general specifications outlined in Exhibit A, attached hereto and made a part hereof. This shall include, but is not limited to, the following:

- a. Calculations of the interaction of all critical parameters.
- b. Laboratory experiments intended to support calculations of critical parameters.
- c. Literature review
- d. Investigation of the state-of-the art in commercial lasers, including foreign ones.
- e. Visits to NASA centers for elucidation of the spacecraft configurations and environmental conditions.
- f. Visits to universities or non-NASA government laboratories for information exchange purposes.

ITEM 2: Upon completion of Item 1 an oral presentation and review will be held at NASA/ERC, Cambridge, Massachusetts. Four (4) copies of all pertinent data shall be made available to the contract monitor one week before said review. This shall include a set of design specification requirements which meet all the performance environment needs, and a list of materials.

Monthly Technical Reports are required and shall be prepared in accordance with Contractor Report Exhibit, dated January 13, 1967, attached hereto and made a part of this contract. Quarterly Technical, Interim Scientific and Final Technical Reports are not required. "

The general specifications as set forth in Exhibit A are quoted from the contract:

"GENERAL SPECIFICATIONS FOR SPACE-QUALIFIED LASER

1. To operate at  $6328\text{\AA}$  with He-Ne.
2. To operate in a single transverse mode, ( $\text{TEM}_{00q} \rightarrow \text{TEM}_{00q+j}$ ).
3. To operate at an initial output power level not less than five (5) milliwatts, CW.
4. To demonstrate the capability of an operating/shelf life of three (3) years, the operating portion of which shall be not less than 10,000 hours. The output power shall not drop below 3 mW at 7000 hours operating time and 2 mW at 10,000 hours operating time.
5. To operate with a polarized output, linear to one part in 1000.
6. To operate with a beam diameter not greater than two (2) millimeters.
7. To operate with a beam divergence consistent with the diffraction limit for the selected beam diameter. The beam is to be round.
8. To operate with no detectable lasing at the  $3.39\mu$  or  $1.15\mu$  wavelengths.
9. To operate without liquid cooling.
10. To operate within a light-tight enclosure
11. To operate without any significant magnetic field leakage.
12. To operate normally in space vacuum environments after rocket launch

13. To operate with a minimum angular deviation of the beam axis as a function of temperature, time, vehicle spin, laser age, magnetic field, etc. Quantitative definition of this parameter will be made later before Phase II work begins.
14. To operate with a minimum of discharge and mode noise in the output radiation. The final specification of this parameter will be made consistent with the state-of-the-art at design freeze.
15. To operate with a power supply and control package developed on this contract along with the laser head and meeting identical environmental specifications. Minimum control functions would be: (a) turn on supplies, (b) start discharge, and (c) power check telemetry.
16. The mounting design shall be as nearly universal as possible, consistent with meeting all other objectives. The design shall permit beam axis alignment with associated apparatus in the satellite assembly phase.
17. The weight, size, and power demand shall be as low as possible consistent with meeting all other objectives.
18. The topics of resonator configuration, type of discharge, type of cathodes (if used), method for maintaining mirror alignment, need for magnetic shielding, dust protection, heat removal, etc. are to be determined in Phase I of this contract.
19. Particular lasers of this design may be converted to emit at  $1.15\mu$  or  $3.39\mu$  wavelengths. Minor consideration should be given to this desired capability.
20. The materials used must be compatible with generally accepted space practice."

The Statement of Work, as given above, has been fulfilled. The design of a Space Qualified Laser (SQL) required under Item I is presented in detail in Section II of this document. The results of our work on subtasks a through f under Item I are detailed in Section III, along with the results of additional subtasks undertaken at the contractor's option.

## SECTION II

### SPACE-QUALIFIED LASER DESIGN

In this section we present the details of the laser design developed under the present contract. The final design version, now designated Hughes type 3072H, is substantially the same as that described in our proposal dated May 1967. During the present contract we have confirmed by experiment those design features which represented new departures in laser construction: all metal-ceramic tube envelope; high-temperature window seals; high efficiency, all solid-state, regulated power supply. During the program we also confirmed our values for the basic parameters of the laser design: length, bore diameter, and cold-cathode operation. We have the highest confidence that lasers fabricated according to the design presented will meet or surpass all of the requirements given in "Exhibit A" (quoted in Section I), as well as those additional specifications which will be imposed by the particular mission requirements.

The outstanding features of our design are summarized below.

- Rugged all metal-ceramic construction, allowing high temperature bakeout and precision manufacture
- Long-life cold-cathode discharge, permitting highest operating efficiency and minimum heat generation within the optical cavity support structure
- Internal mirrors, reducing optical cavity losses and simplifying the dust-sealing requirements while retaining a polarized output
- Optimized optical cavity support structure, using materials and geometry to minimize the effects of thermal gradients, vibration, and external mechanical stresses
- Integrated tube and power supply package with a helium atmosphere, minimizing altitude-induced stresses on the optical cavity support structure, promoting component cooling, and minimizing corona problems
- All solid-state dual power supply with precision current regulation and space-proven circuitry.

The over-all weight of the proposed unit is approximately 11.6 lb, and the total power consumption is approximately 30 W from the 28 V dc line.

## A. METAL-CERAMIC TUBE

The reasons for our choice of a metal-ceramic laser tube envelope were discussed in detail in our proposal. The choice was based on years of experience in developing both glass and metal-ceramic microwave tubes and, more recently, glass, fused silica, and metal-ceramic lasers. All our experience indicates the ultimate superiority of metal-ceramic construction, particularly for applications requiring operation in unfavorable environments. A prototype metal-ceramic laser was fabricated during the present program with no unexpected difficulties, thus confirming the correctness of our choice. A photograph of this tube is shown in Fig. II-1.

Figure II-2 shows the construction details of the metal-ceramic prototype fabricated under the present program. The proposed design is identical to that shown in the figure, except that the over-all dimension is shortened to 14.75 in. (the metal and ceramic parts and sub-assemblies were ordered for the prototype before the final dimensions were fixed). Figure II-2 shows both the metal-ceramic discharge tube and the optical cavity support and adjustment structure. The items called out in the figure are named in Table II-1 and are described in further detail below.

High purity  $\text{Al}_2\text{O}_3$  is used for the ceramic bore (1). The active bore dimensions for the prototype tube are 14 in. by 2.5 mm i.d.; for the proposed tube these will become 10 in. by 1.5 mm. The bore is metallized and sealed to the internal bore support (2) and the end bore supports (3) and (10). The cantilever bore section shown in the figure will be reduced by 30% in the proposed design, materially increasing the resonant frequency of this section. Vibration tests (see Section III-F) performed on glass tubes with even larger cantilever sections have indicated that this is not a problem area.

The cathode support cylinders (8) with end (3) and (10) form a gas reservoir with approximately  $600 \text{ cm}^3$  volume in the present design, and  $400 \text{ cm}^3$  in the proposed design. The results of our life tests to date indicate this will be more than sufficient for 10,000 hours operating life. The cathode consists of a processed tantalum cylinder (23) with end caps (6) slipped inside the vacuum envelope (8). Life test data (discussed in Section III-F) indicate that this cathode type will also be suitable for 10,000 hours operation.

The anodes of this dual discharge design are formed by the metal bellows (12) on each end of the discharge tube. Each bellows is brazed to an adapter ring (11) which is, in turn, heliarced to the flange (4) brazed to the metallized ceramic bore. The vacuum envelope is completed by the prism holder (14) and mirror holder (15) (see View A



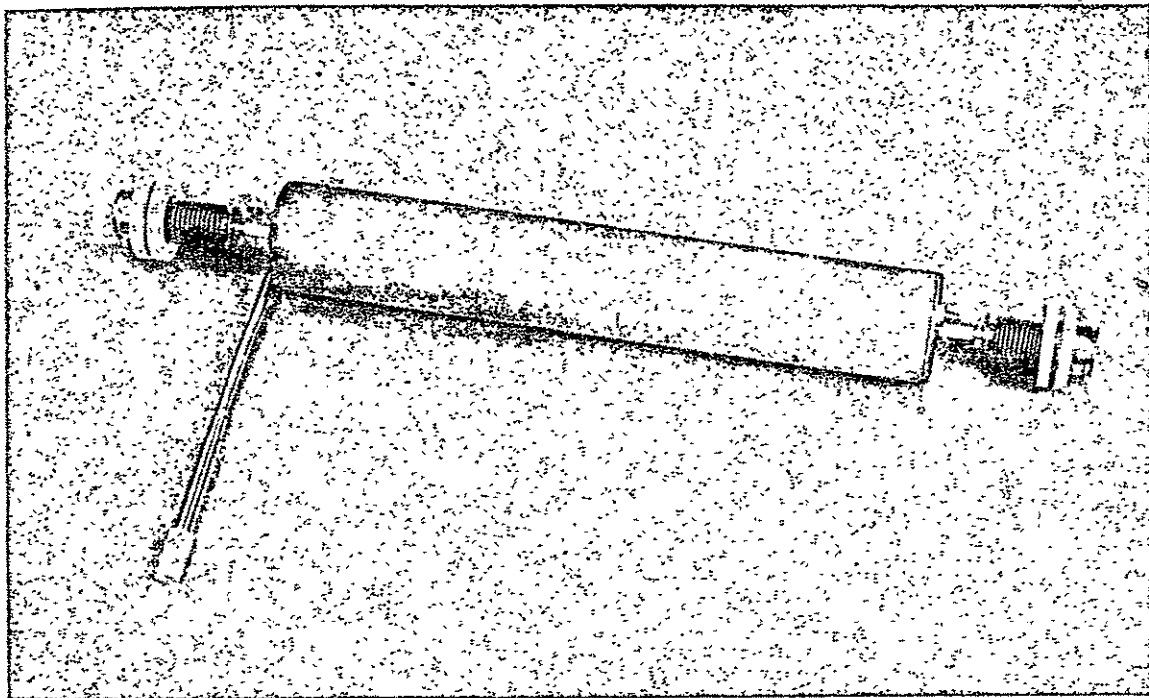


Fig. II-1. Photograph of completed metal-ceramic tube.

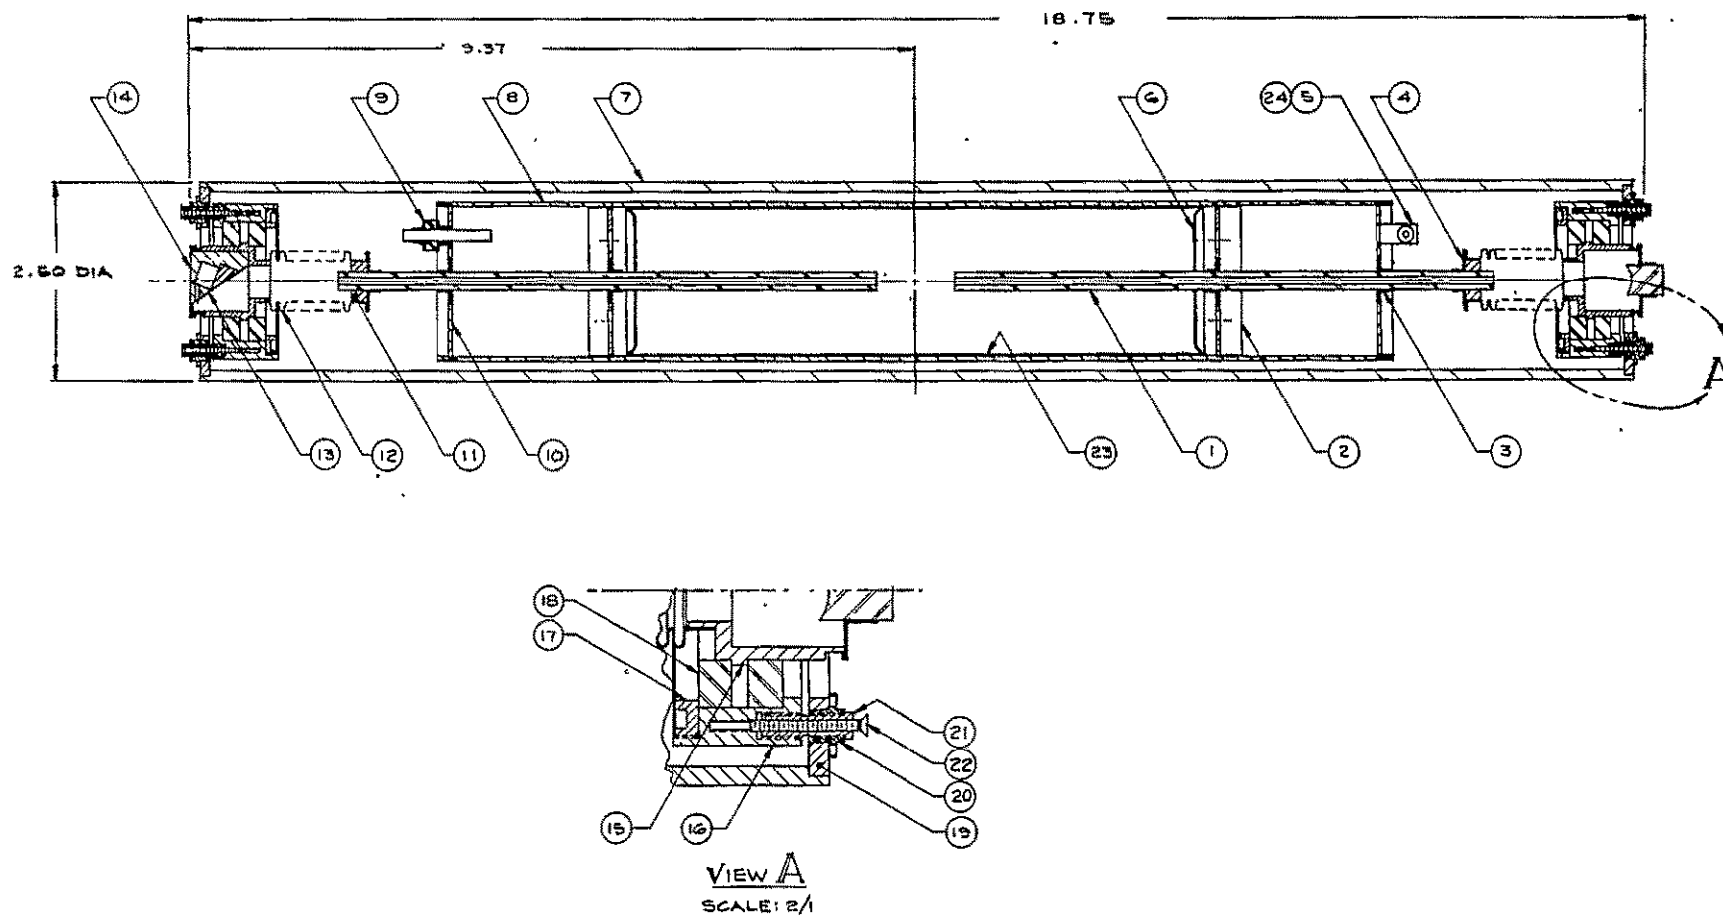


Fig. II-2. Metal-ceramic tube cross sectional view.

TABLE II-1

Legend for Figure II-2

|    |                            |
|----|----------------------------|
| 1  | Ceramic Bore               |
| 2  | Internal Bore Support      |
| 3  | Pumpout Bore Support       |
| 4  | Heliarc Flange Adapter     |
| 5  | Pumpout                    |
| 6  | Cathode End Cap            |
| 7  | Cavity Support Cylinder    |
| 8  | Cathode Vacuum Jacket      |
| 9  | Getter Feedthrough         |
| 10 | Getter Bore Support        |
| 11 | Bellows Adapter            |
| 12 | Bellows                    |
| 13 | Prism Clamp                |
| 14 | Prism Holder               |
| 15 | Mirror Holder              |
| 16 | Adjusting Mirror Support   |
| 17 | Retainer Ring              |
| 18 | Insulator                  |
| 19 | Mirror Support             |
| 20 | Coarse Adjustment          |
| 21 | Differential Screw         |
| 22 | Locking Screw              |
| 23 | Processed Tantalum Cathode |
| 24 | Tipoff                     |

for (15)). The coated Brewster's angle half prism used for the high reflectance mirror provides the polarization reference for the beam. This prism is held mechanically in part (14) and does not form a portion of the vacuum envelope. The output mirror attached to part (15) forms part of the vacuum envelope. The technique for making these metal-to-metal heliarc sealed mirrors was worked out during the present program and is described in detail in Section III-G.

Electrical connection to the getter is made through a ceramic feedthrough insulator (9). This connection is used only during initial tube processing. An alternate stacked ceramic disc seal was indicated in our proposal, but the feedthrough shown in (9) is simpler and has proven quite reliable on other metal-ceramic microwave tubes and in the Hughes EDD appendage ion vacuum pumps. The vacuum tipoff (24) is made by pinching the copper vacuum pumpout (5) in the usual vacuum tube fashion.

The vacuum envelope (8) is held rigidly to the optical cavity support cylinder (7) with a layer of potting compound suitable for use in spacecraft. The mirrors are held rigidly with respect to the outer cylinder by adjustable mounts (see View A, Fig. II-2). The mirror holder (14) or (15) is held in a retainer ring (17) via insulators (18), necessary to allow the optical support structure to remain at ground (cathode) potential while the mirror holder floats at anode potential. The retainer (17) is positioned with respect to the support structure end plate (19) by locking differential screw mechanisms (21), (22), and (23). These screw mechanisms are adaptations of the design now being used successfully in our airborne argon ion laser, and other Hughes military optical equipment.

Many considerations enter into the realization of a successful laser design. The tube design shown in Fig. II-2 is a consequence of several choices among alternative approaches. Detailed discussions of the engineering considerations involved in the choice of envelope materials, mirror geometry, cathode type, etc., were given in our original proposal. The conclusions reached in those discussions have been further borne out by our work during the present Phase I program. The arguments for the critical design choices made in arriving at the present proposed design are reviewed only briefly here.

#### 1. Choice of a Cold Cathode

The cold cathode design proposed originally and also incorporated in the present design has evolved from many experiments performed at Hughes. Although early cold-cathode tubes proved to have short life compared with simple hot-cathode versions, the pioneering work of Hochuli and Haldemann (Ref. II-1) with aluminum oxide films

suggested that practical cold-cathodes could be made. We made some early experiments with oxidized aluminum, following Hochuli, but abandoned this approach because of the relatively poor qualities of aluminum as a clean, bakable vacuum tube material. A better cathode material was then developed in the form of an oxidized tantalum surface, built as a hollow structure. The layer of  $Ta_2O_5$  formed by proper processing should, in theory, have even higher sputtering resistance than  $Al_2O_3$ , because of the higher heat sublimation of  $Ta_2O_5$  (although neither rate has been actually measured because of the extremely low yield for both materials).

The theory of cold-cathode emission through insulating layers and the appropriate cathode configuration was covered briefly in our proposal. Thin oxide films, although insulators, can be made to supply low emission densities by tunneling, in which the electron penetrates the insulating surface quantum mechanically. The emission density must be kept low so that the electric field causing the tunneling is not sufficiently high to punch through the film. The exact hollow cathode configuration used is also of great importance. A design with an objective life of >10,000 hours must have very uniform, low emission density; a localized high-emission region could produce orders of magnitude more sputtering than neighboring low emission regions. The uniformity of emission is controlled by the electrode and plasma configuration. The design proposed for the 3072H space-qualified laser is essentially a doubled version of that used in the 3082H alignment laser tube made by Hughes for Keuffel and Esser Co. Life tests on the 3082H tubes have gone over 7000 hours to date with unchanged discharge or laser characteristics. The details of these life test cathode studies on the 3072H type cathodes are given in Section III-F. We are confident that the cathode design proposed herein is suitable for a 10,000 hour tube life.

## 2. Choice of a Dual Bore Design

The proposed design utilizes a split discharge column employing two anodes and a common cathode. This choice was made not only to reduce the discharge voltage by a factor of two but also to provide operating redundancy. Either half of the tube may be operated independently provided separate power supplies are used. This allows the laser to be operated with approximately 35% of full power if desired. It also offers operation at 35% output if one power supply section should fail. In this design the mirror surfaces are far removed from the cathode region where sputtering (if any) occurs, thus affording maximum protection to the optical surfaces.

### 3. Choice of Internal Mirrors

The various factors entering into the choice of mirror coatings and cavity configuration were discussed in our original proposal. The decision to use "hard" coated mirrors in an internal mirror configuration, with a coated Brewster's angle half-prism to provide polarization, was borne out by our subsequent experiments, discussed in Section III-G. We found that "hard," ultraviolet-resistant coatings are available with losses equal to or smaller than the best commercial soft coatings (Spectra-Physics). We also found that a significant increase in power could be obtained by eliminating the Brewster's angle windows. A sealing technique was developed which will allow the fabrication of a bakable internal mirror tube (although with further development this same sealing technique could also be applied to Brewster's angle windows). The simplicity and compactness of the internal mirror design is also superior to an external mirror arrangement with separate hermetically sealed compartments between the windows and mirrors. We feel confident that this mirror configuration will result in the most practical tube for space use.

### B. OPTICAL CAVITY SUPPORT STRUCTURE DESIGN

The optical cavity support structure was shown in cross section in Fig. II-2 as a simple tubular member connecting the mirror adjustment mechanisms on either end. In our proposed design we intend to make this tubular member as a composite structure consisting of an inner and outer tube spaced apart by ribs or posts, as shown in Fig. II-3. The reduction of externally generated azimuthal temperature gradients around the inner tubular member (to which the end mirror retaining assemblies are attached) should greatly reduce the misalignment due to bending. We may think of the outer tube as "shorting out" the externally driven thermal gradients induced, for example, by asymmetry in the mounting bracket, as shown in Fig. II-3.

We have chosen beryllium as the material for the cavity support structure. While one might think that a lower-expansion material such as fused silica would be superior, a careful analysis of the problem shows this is not correct. The support structure must resist deformation caused by changes in mechanical stresses and by stress originating from thermal gradients. The resonant frequency of the mirror support assembly also must be maintained as high as possible in order to minimize the effects of spacecraft low frequency vibrations.

In Table II-2 the physical properties of materials pertinent to this discussion are listed for several possible candidates for the cavity support tube. The rigidity of a simply supported overhanging beam of

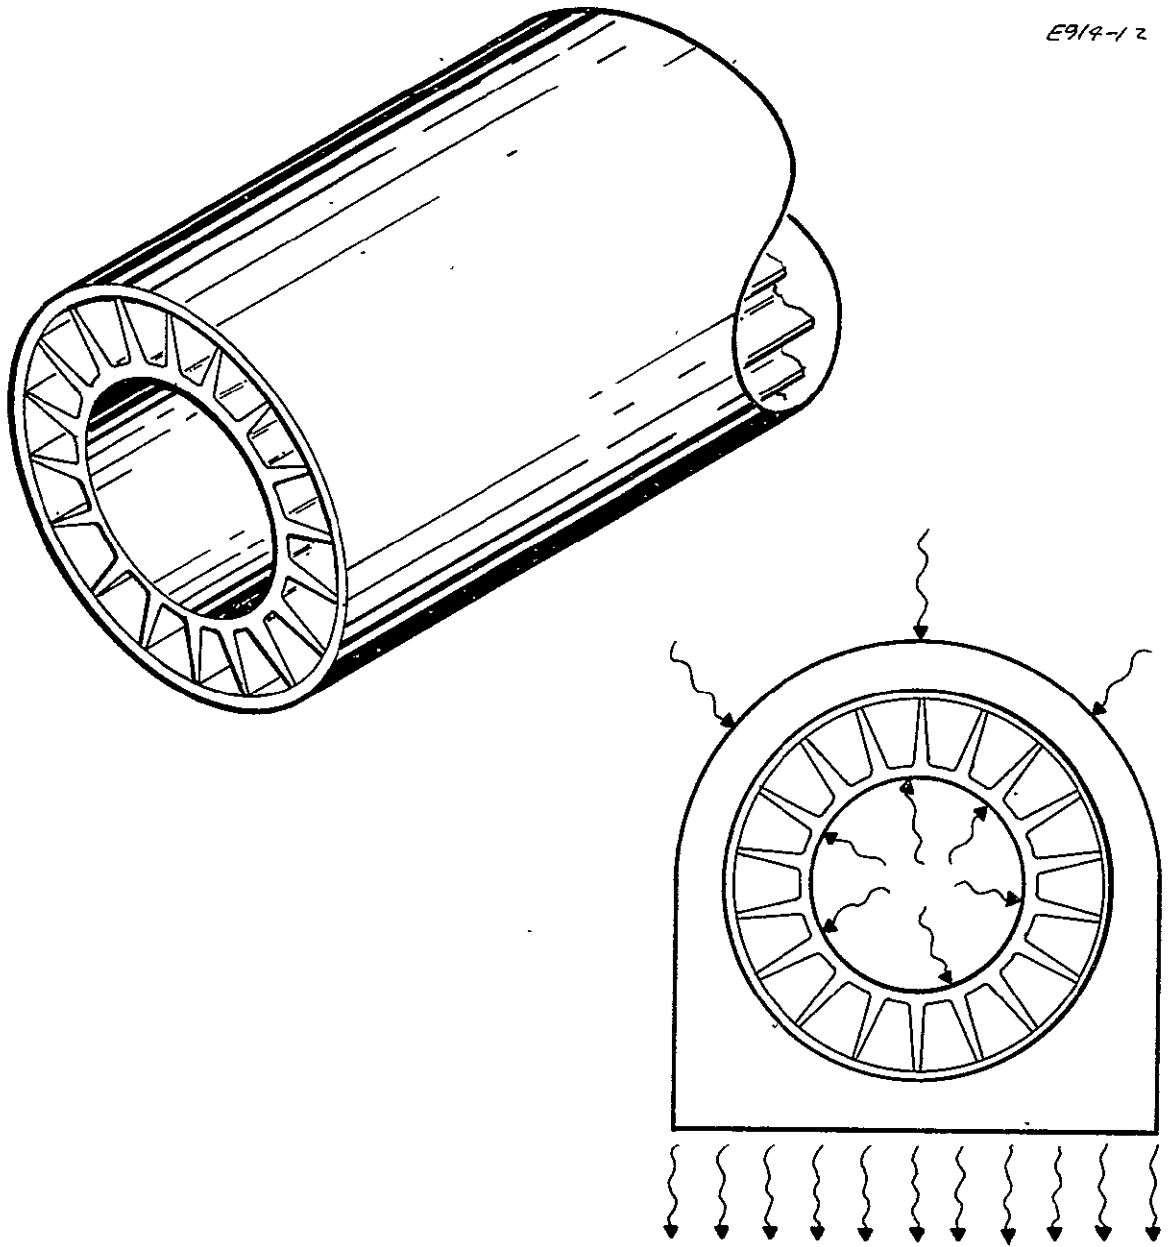


Fig. II-3. Proposed composite mirror support structure.

TABLE II-2

Pertinent Physical Properties of Possible Cavity Support Tube Materials

| Material  | E, psi             | $\rho$ , lb/in. <sup>3</sup> | K, in./in./°C         | $\sigma$ , cal/cm-sec/°C | E/ $\rho$ , in.    | K/ $\sigma$ , (cm-sec)/cal |
|-----------|--------------------|------------------------------|-----------------------|--------------------------|--------------------|----------------------------|
| Aluminum  | $9.0 \times 10^6$  | $9.75 \times 10^{-2}$        | $23.6 \times 10^{-6}$ | $5.3 \times 10^{-1}$     | $9.23 \times 10^7$ | $4.45 \times 10^{-5}$      |
| Beryllium | $42 \times 10^6$   | $6.7 \times 10^{-2}$         | $11.6 \times 10^{-6}$ | $3.5 \times 10^{-1}$     | $62.7 \times 10^7$ | $3.32 \times 10^{-5}$      |
| Invar     | $21.4 \times 10^6$ | $31.4 \times 10^{-2}$        | $9.0 \times 10^{-6}$  | $0.26 \times 10^{-1}$    | $6.82 \times 10^7$ | $3.44 \times 10^{-5}$      |
| Lockalloy | $28 \times 10^6$   | $7.56 \times 10^{-2}$        | $16.6 \times 10^{-6}$ | $4.9 \times 10^{-1}$     | $37.0 \times 10^7$ | $3.38 \times 10^{-5}$      |
| Magnesium | $5.77 \times 10^6$ | $6.28 \times 10^{-2}$        | $27.1 \times 10^{-6}$ | $3.67 \times 10^{-1}$    | $9.2 \times 10^7$  | $7.19 \times 10^{-5}$      |
| Pyroceram | $12.5 \times 10^6$ | $7.94 \times 10^{-2}$        | $0.20 \times 10^{-6}$ | $0.048 \times 10^{-1}$   | $15.8 \times 10^7$ | $4.17 \times 10^{-5}$      |
| Quartz    | $10.4 \times 10^6$ | $7.94 \times 10^{-2}$        | $0.55 \times 10^{-6}$ | $0.033 \times 10^{-1}$   | $13.1 \times 10^7$ | $16.7 \times 10^{-5}$      |
| Tantalum  | $27 \times 10^6$   | $60 \times 10^{-2}$          | $6.5 \times 10^{-6}$  | $1.3 \times 10^{-1}$     | $4.5 \times 10^7$  | $5.0 \times 10^{-5}$       |
| Titanium  | $16.8 \times 10^6$ | $16.3 \times 10^{-2}$        | $8.41 \times 10^{-6}$ | $0.27 \times 10^{-1}$    | $10.3 \times 10^7$ | $30.8 \times 10^{-5}$      |



uniform cross section is directly proportional to the ratio  $E/\rho$ ; the deformation of the beam due to the stress exerted by the weight of the end plate is inversely proportional to  $E$ . Therefore, from the standpoint of mechanical rigidity, a material of a large modulus of elasticity  $E$  and a low density  $\rho$  is required. The desirability of a high resonant frequency also demands a material with a large  $E/\rho$  ratio since the resonant frequency of the tube is directly proportional to  $(E/\rho)^{1/2}$ . If the weight of the assembly is to be minimized, a low density material is desirable. This is true for a simple tube or a composite structure as shown in Fig. II-3.

In order to minimize beam distortion resulting from stresses caused by thermal gradients, it is imperative that the material have a low ratio of thermal coefficient of expansion to thermal conductivity ( $K/\sigma$ ). Referring to Table II-2, it is quite apparent that beryllium surpasses all the other candidates in every requirement. Beryllium has the largest modulus of elasticity, the smallest density, the largest ratio of  $E/\rho$ , and the smallest ratio of  $K/\sigma$ . It is also quite clear from Table II-2 that aluminum, magnesium, and quartz are all considerably poorer in the mechanical ratio  $E/\rho$ , and quartz is also poorer by a factor of 5 in the thermal ratio  $K/\sigma$ .

We have chosen a single-point mounting foot for the cavity support tube, as shown in Fig. II-4. This mounting foot provides both mechanical support and a thermal path to the heat sink (spacecraft frame). The single foot support serves to isolate the cavity support cylinder from torques or stresses which the laser package or spacecraft heat sink might undergo.

The resonant frequency for a cantilever arrangement as shown in Fig. II-4 (but with 18.75 in. over-all length) was calculated to be 4090 Hz, assuming a simple center support and a solid beryllium tube with a 0.25 in. wall thickness. This frequency is sufficiently high to be out of the high amplitude range of low frequencies typical of spacecraft vibrations. For the 14.75 in. structure actually proposed, the resonant frequency is even higher — approximately 7000 Hz. For the ribbed or post separated composite tube, the resonant frequency will be still higher. We are confident that this method of support is superior to two-point or two-ring mounts, even though these have slightly higher resonant frequencies, because of the isolation from external torques and stresses provided by the single-foot mount.

### C. PACKAGE DESIGN

The key feature of our proposed package design is that the laser and power supply are integrated into one hermetically sealed

E945-5

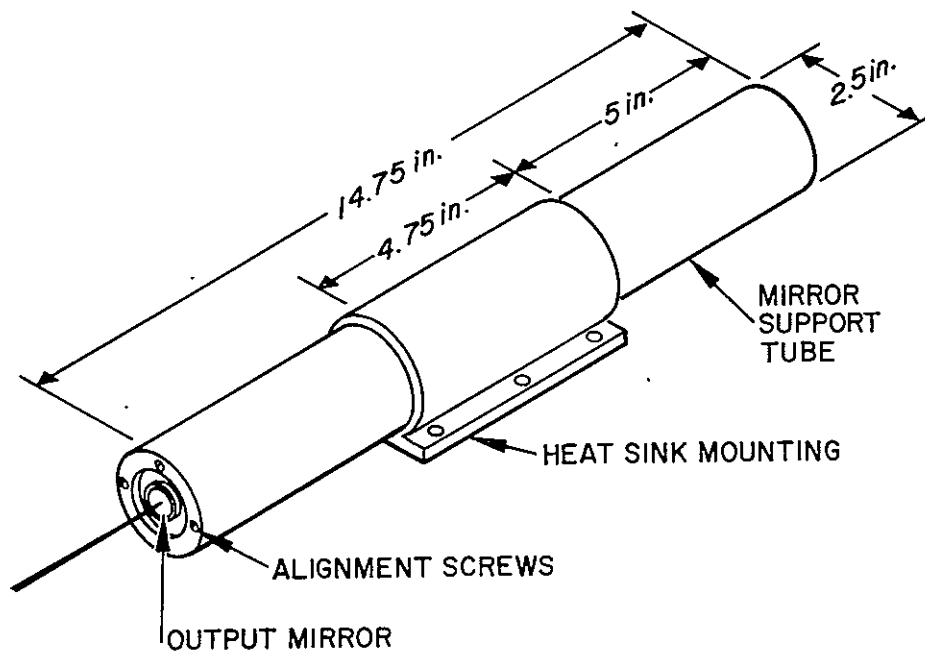


Fig. II-4. Over-all view of cavity support structure and mounting bracket for 3072H laser.

helium-filled package, as shown in Fig. II-5. This arrangement has the following advantages:

- The laser cavity is exposed to a relatively constant-pressure helium atmosphere, so that changes in the forces on cavity structure in traveling from the earth's surface to space are minimized.
- No high voltage connectors or cables are needed to connect the laser to the power supply. All high voltage leads are contained within a sealed helium atmosphere, thus allowing operation through critical altitude without special design of the power supply or cables to suppress corona.
- The minimum lead length between the laser discharge tube and power supply minimizes the shunt capacitance and provides the maximum stability with the minimum values of series stabilizing resistors.
- The helium atmosphere helps prevent hot spots from forming in the electronic circuitry by providing a high thermal conductivity path to the package walls.

The proposed package material is magnesium alloy (AZ-61 or AZ-91) heliarced or dip brazed. Interior ribs and edge flanges are used to stiffen the structure and allow the use of light stock material for the walls. The input connectors for the 28 V prime power and telemetry are helium-leak-tight assemblies. The output window is antireflection coated and sealed to the package with a metal compression seal capable of remaining leak tight under pressure and temperature cycling. A tubulation for evacuation and helium filling is also provided. The final seal after helium filling is made at this tubulation.

Two physical arrangements are proposed, with the choice between them being made on a mission requirements basis. The first version, shown in Fig. II-5, is similar to the demonstration laser prototype built under the present program (see Section III-H), except that the length has been reduced from 20-7/8 in. to 16 in. over-all. The volume is approximately 380 in.<sup>3</sup>. The alternative arrangement is shown in Fig. II-6; the volume is approximately the same, and the two arrangements differ only in the power supply circuit board layout. Since both arrangements use the same laser tube, cavity support structure, and power supply components, the qualification of both versions would take little more effort than either alone.

Both package versions use the same method of boresight alignment. Once the laser is adjusted and sealed inside, a precision edge is machined on a corner of the package parallel to the experimentally

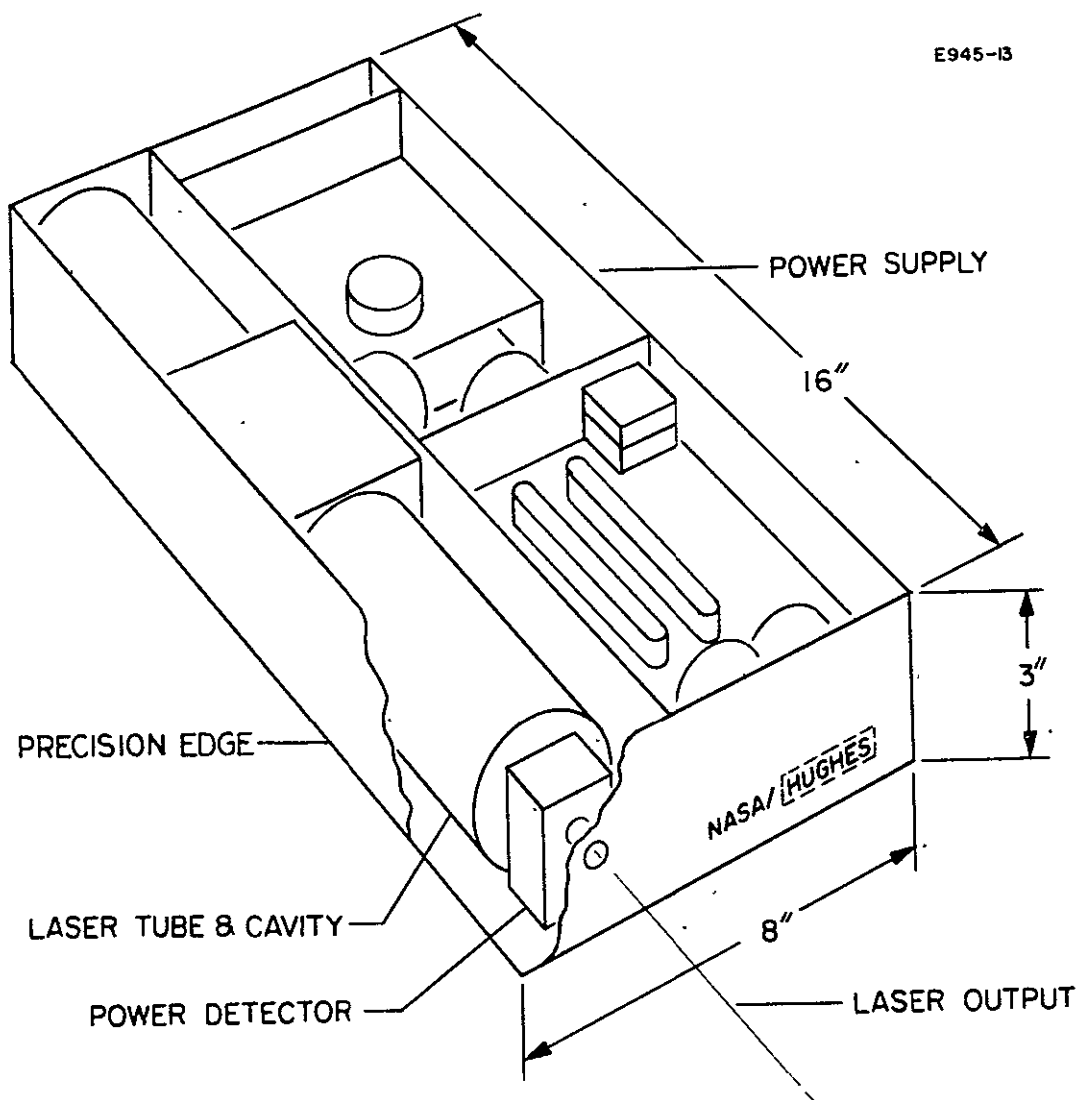


Fig. II-5. Package arrangement alternative 1.

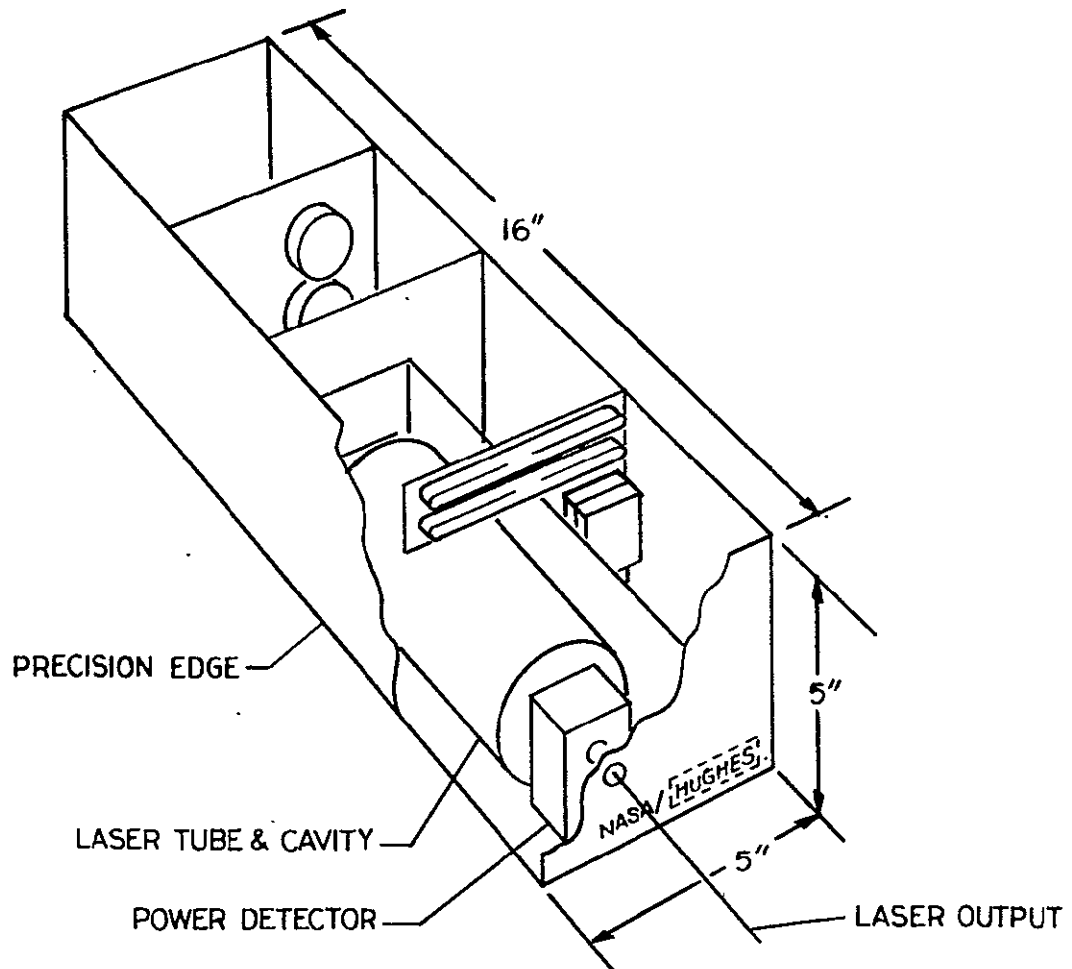


Fig. II-6. Package arrangement alternative 2.

determined optical output axis. In this way units mounted and aligned with this edge as a guide can be interchanged at will without readjustment. The precision edge runs nearest the mounting foot of the laser, as indicated in Figs. II-5 and II-6, so that errors in alignment between the edge and the laser optical axis due to external torques or stresses applied to the mounting base plate are minimized. Mounting of the laser to the base plate is accomplished by bolting through the external flange of the package as shown in Fig. II-7. Heat transfer from the package to the base plate occurs over the large area of the package bottom.


The over-all package sizes given in Figs. II-5 and II-6 are the maximum proposed. Measurements described in Section III-B assure that these will be adequate. Some additional effort should be expended on further decreasing the package size and weight by the use of the side "bulges" out to the flange dimensions and the use of exterior stiffener ribs to allow reduction in the wall thickness used. The exact package strength (and hence size and weight) will be determined by the qualification program itself.

Although not required by the present contract, some consideration was given to the problem of using an electro-optical modulator in conjunction with the proposed laser. Intracavity modulation devices would of course require a complete mechanical redesign of the laser tube, since internal mirrors are used. External modulation is easily added, however, and we believe that the integrated sealed package approach could be used to advantage. The same laser tube and cavity structure could be used with the electro-optic modulator mounted directly on the end of the mirror support structure, with the laser package lengthened to accommodate this extension. The modulator driver (also requiring high voltage, low capacity leads) could be placed in the lengthened portion of the power supply compartment. All the advantages mentioned with regard to the laser then accrue to the modulator. Additional qualification testing of the modulator components and driver and the over-all unit would be necessary, of course, but the procedures would amount to no more than separately qualifying the modulator alone, since the laser tube and power supply would be already in proven form.

#### D. POWER SUPPLY DESIGN

The detailed design for an all solid-state dual power supply was evolved during the Phase I contract. The supply was fabricated and tested, and the test results are given in Section III-H. Briefly, the proposed supply provides current to the laser discharge with approximately 0.3% variation over the input voltage range from 24 to 32 V dc, a 0.6% variation over the temperature range from -20°C to +50°C and

E945-6

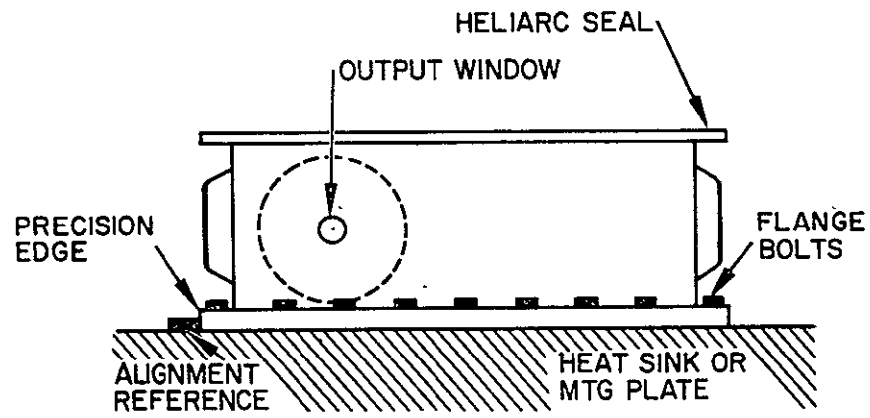

E945-7

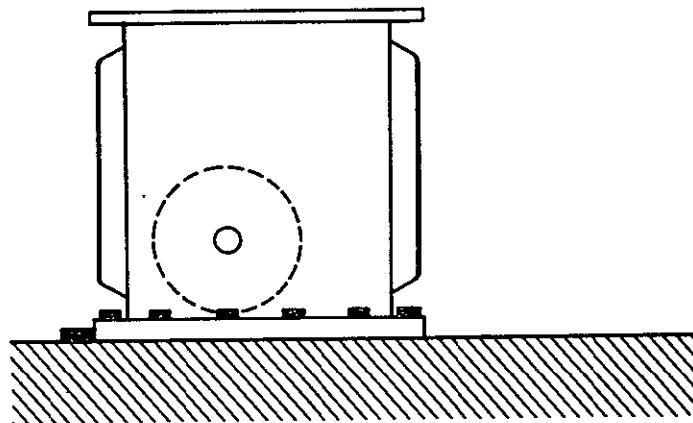


Fig. II-7. View showing package mounting flange and alignment edge.

a 1% variation over the load resistance range from 130 k $\Omega$  to 160 k $\Omega$  (corresponding to a laser discharge voltage range of 1100 to 1360 V).

Figure II-8 shows a block diagram of the dual supply. The power supply is made up of the following seven subcircuits:

- control logic
- current regulator
- dc to dc converter
- high voltage filter
- current sensing
- starting circuitry
- telemetry monitoring circuitry

The first six subcircuits are duplicated, with one set to operate each anode of the laser. The function of these seven circuits is detailed as follows. For component identification, reference should be made to the complete schematic B190074 attached to this document.

#### 1. Control Logic

Two special power turn-on circuits are provided so that the entire power supply can float on the dc bus and be activated or turned off by means of low level signals.

Transistors Q5 and Q6 comprise the remote power turn-on circuit. A low level input signal will turn on Q5, which provides additional bias to turn on transistor Q3 in the regulator circuit. To turn off the power supply, the low level signals are removed. Either anode may be turned on or off independently of the other.

#### 2. Current Regulator

The function of the pulse width type regulator is to provide a regulated laser current from 24 to 32 V dc input source. It is capable of regulating this current to better than  $\pm 5\%$  for changes in input voltage and temperature. The over-all efficiency of the regulator circuit alone is 89 to 94%, depending on the temperature and input voltage.



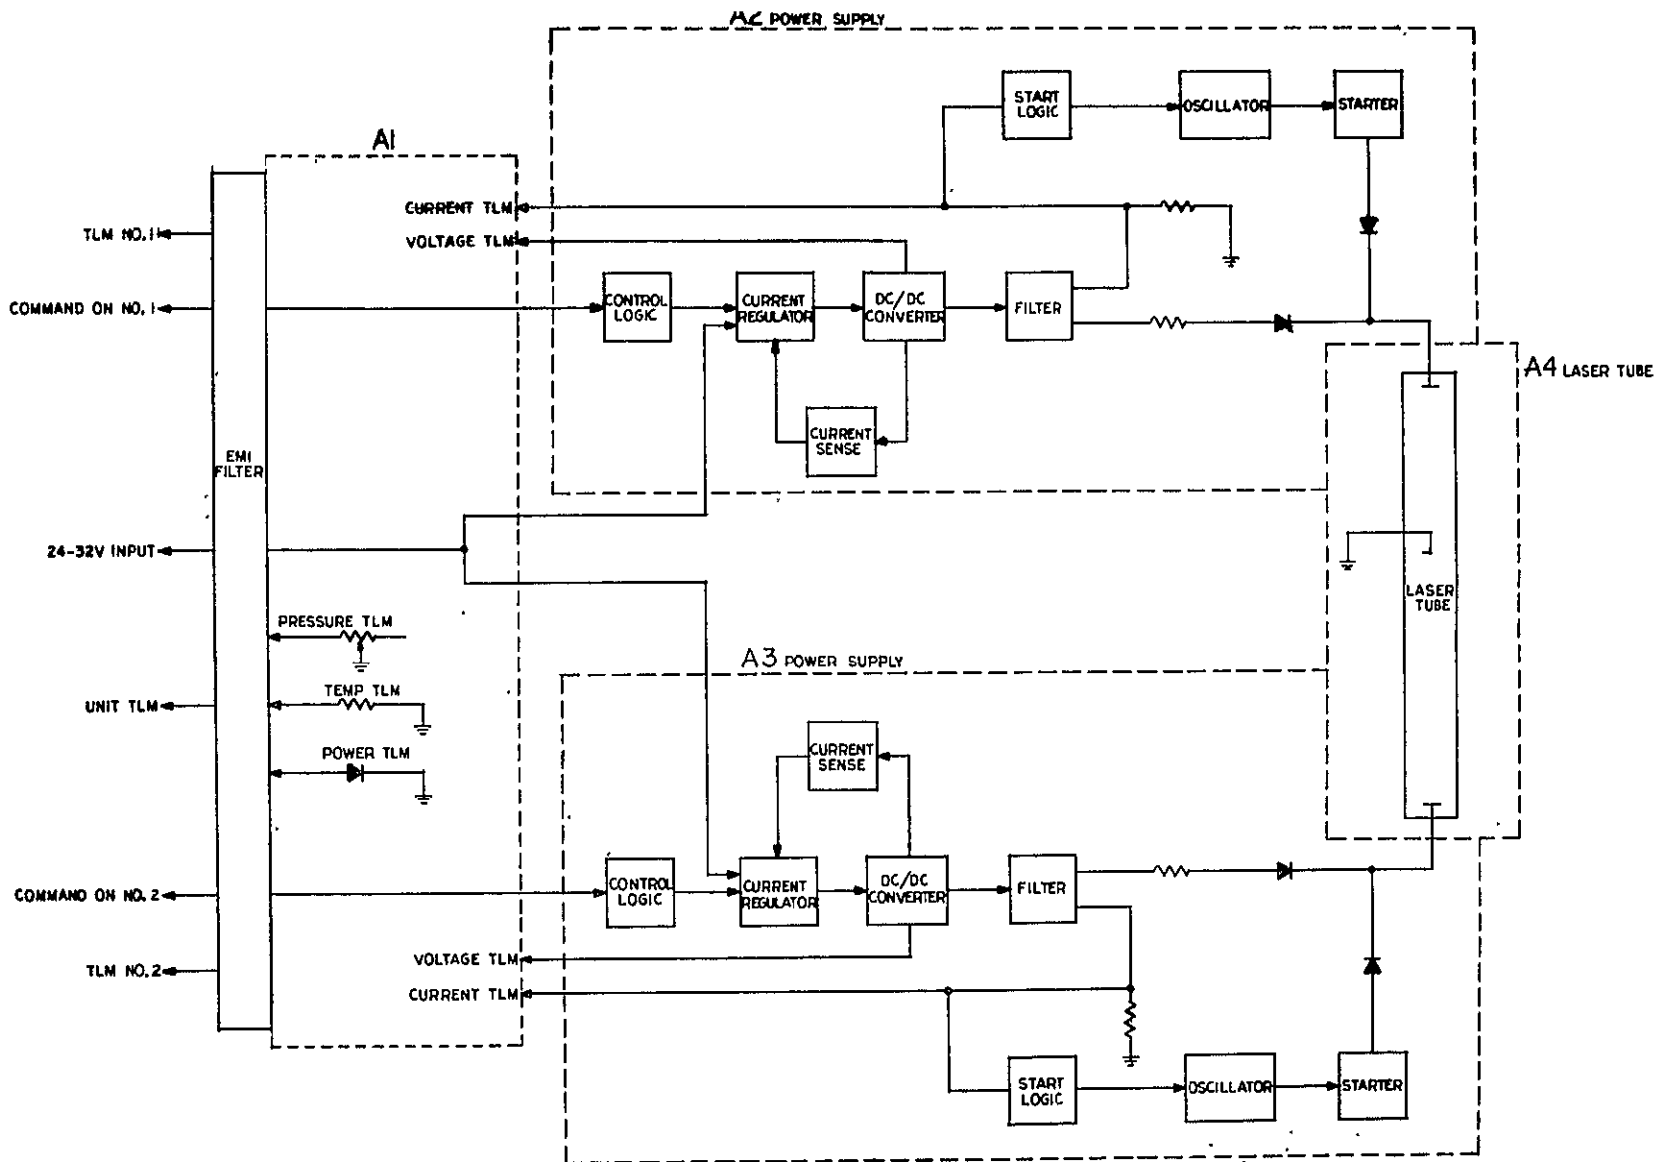


Fig. II-8. Block diagram of SQL power supply.

Transistors Q1 and Q14 are the switched pass transistors which produce rectangular pulses to L3 and C9 for smoothing. Q2, 3, 4, 7 and 8 provide the amplification which maintains a low bus voltage ripple. The signal produced at the junction of CR29 and R18 is the sensing voltage which is proportional to output current.

### 3. DC to DC Converter

The dc/dc converter is used to convert the input bus voltage to about 1300 Vdc to operate the laser anodes. It also supplies low voltages to operate the starting circuitry and the saturable reactor in the current feedback loop.

Transistors Q11 and Q12 and transformers T1 and T2 form a switching circuit which generates squarewave ac voltages in the windings of T2. The frequency of these square waves is determined by the volt-second capacity of the transformer T1, and is approximately 4000 Hz in the present design. Q9 provides forward bias to the switching circuit to initiate oscillation but is then shut off through CR12 and CR13, thus ensuring a higher efficiency with R20 removed electrically.

### 4. High Voltage Filter

The high voltage filter provides filtering for the anode voltages through use of L2, C14, and C13. The output ripple from this filter is below 1% peak to peak (0.3% rms).

### 5. Current Sensing

Current sensing is accomplished by means of saturable reactor SR1. The output from SR1 is rectified by CR31 through 34, filtered by C15, and then used as the sensing signal to control the switching regulator.

### 6. Starting Circuitry

The starting circuitry causes high voltage pulses from T3 to appear across the laser electrodes through steering diodes CR27 and CR28 until the laser starts. SCR Q15 discharges C12 into T3 from a winding on T2, through diodes CR16-CR19 and R27. Transformer T3 continues to receive input voltage pulses so long as Q13, a unijunction transistor, is allowed to oscillate and provide pulses to Q15. As soon as anode current flows, diode CR 20 becomes forward biased and disables Q13.

## 7. Telemetry

Standard telemetry outputs (0 to 5 V dc) are provided to monitor each laser anode voltage through an auxiliary winding on the dc to dc converter. The anode currents are monitored directly by R34. Pressure telemetry is provided by a transducer MT1, similar to that used on the HS 308 and ATS programs. Temperature telemetry will be provided by thermistors at as many points as required. A single temperature telemetering circuit is shown using R39, R36 and R38.

The optical power monitoring circuit is not shown on Schematic B190074, since some further evaluation is needed. Approximately 1% of the output power (50  $\mu$ W at full output) will be diverted by a beam splitter to drive the power monitor sensor. Two optical detectors are being considered for this sensing task: a standard silicon solar cell and a photo-FET. The solar cell has the advantage of being a fully space-qualified component. The photo-FET has the advantage of a higher output signal requiring less amplification to the 0 to 5 V telemetry level, but it has not yet been exposed to space environmental testing. In either case, a balanced bridge circuit using two detectors will be used to compensate as much as possible for temperature variations, and several stages of solid-state amplification will be necessary to convert the 50  $\mu$ W signal into the 5 V telemetry output. The over-all size and power consumption of this power monitor circuitry should be negligible, however.

## 8. Efficiency

One of the major emphases during the development of this power supply was to obtain the highest energy conversion efficiency. A measured worst-case efficiency of 77% occurs at high line voltage and high temperature, when the power loss in R28 is neglected. (R28 is a laser biasing resistor necessary for obtaining an over-all positive resistance from the plasma tube and is individually chosen for the particular discharge tube used.) Under other combinations of line voltage and temperature, the over-all efficiency is greater than 77%.

## E. RELIABILITY AND QUALITY ASSURANCE PROVISIONS, PHASE II

In this section and in Appendices A, B, and C we shall describe the Reliability and Quality Assurance provisions to be implemented during Phase II of the Space Qualified Laser Program:

Appendix A: Reliability Program, Phase II

Appendix B: Qualification-Reliability Test Plan

Appendix C: Quality Assurance System.

Hughes reliability and quality assurance provisions are intended to conform to the objectives outlined for Phase II. The program described herein is designed to provide

1. effective planning and management of the reliability and quality assurance effort
2. assurance of a closed loop monitoring and evaluation system
3. definition of the major qualification and reliability tests
4. the necessary documentation for qualifying the integrated laser and power supplies.

The Reliability Program Plan is presented as Appendix A. It describes the Hughes Electron Dynamics Division organizational structure and interfaces. This plan also describes the Reliability Engineering tasks to be undertaken during Phase II. It should be noted that this plan suggests the use of Mil-Spec parts for Phase II and High-Reliability parts for later flight units. The major reliability effort will be directed toward (1) improving the lifetime characteristics, (2) elimination of failure modes and mechanisms, and (3) over-all reliability assessment. These reliability tasks will be conducted in a manner time-phased with the engineering effort.

The Qualification-Reliability Test Plan is presented as Appendix B. It describes the Qualification and the Reliability tests to be performed as an integral part of the Phase II program. These tests are designed to insure that the integrated laser and power supplies can meet the requirements of the severe space environments. The data collected from these tests will be used for reliability evaluation and analysis.

The Quality Assurance System described in Appendix C is designed to provide effective management of the quality control plans and procedures. The provisions in this section describe the methods for control drawings, specifications, procuring material and parts, packaging and shipping provisions, etc. The Quality Assurance System will be utilized as a criterion for determining conformance to Phase II requirements.

## SECTION III

### PHASE I SUBTASKS

Work performed in satisfaction of Item 1, subtasks a through f and additional subtasks, is documented in this section.

#### A. CALCULATION OF CRITICAL LASER PARAMETERS

A review of basic helium-neon laser mechanisms was given in our proposal and the resulting scaling laws were discussed. We repeat the scaling law summary here as an introduction to the parameter calculation.

Certain relationships have been found empirically for optimum He-Ne laser operation. Some of these have been put on a reasonably firm theoretical basis by Gordon and White (Ref. III-1), while others remain essentially empirical. The measurements are accurate enough for the proper design of an optimum laser, however, so that no further research is necessary to determine the scaling relationships. We simply state the results below and show how they may be used to design the required laser.

- The optimum ratio of helium pressure to neon pressure has been determined to be approximately 5:1. The exact proportion is not too critical and a broad optimum exists.
- Isotopically pure  $\text{He}^3$  has proven to be superior to  $\text{He}^4$  as shown by White (Ref. III-2). The reason is that the  $\text{He}^3$  atoms have higher velocities and hence more rapid collision rates with neon atoms.
- The optimum total gas pressure for a tube of diameter Dis

$$pD = 2.9 \text{ to } 3.6 \text{ Torr-mm} , \quad (\text{III-1})$$

with the lower value appropriate for smaller diameter tubes (1 to 2 mm).

- The electron temperature is a function only of  $pD$  and is therefore the same for all optimum lasers. It is approximately independent of current. These relations have been confirmed by Labuda and Gordon (Ref. III-3) and Wada and Heil (Ref. III-4). Constant  $T_e$  and constant  $pD$  imply a

constant  $E/p$  for the discharge; that is,  $E/p$  is a measure of the energy gained by electrons in the electric field  $E$  between collisions with gas atoms. These relations also imply constant  $(E/p)(pD) = ED$  for the discharge; since  $E \approx V_{\text{tube}}/L$ , then  $V_{\text{tube}} D/L$  is a constant. Consistent with the above relationships is the observed relation  $I/D =$  a constant. Thus,  $(V_{\text{tube}} D/L)(I/D) = V_{\text{tube}} I/L$  is also a constant, an expression that the input power per unit length for an optimum laser is approximately the same no matter which diameter is chosen.

The optimum small signal gain coefficient at  $0.6328 \mu$  is given approximately by

$$g \frac{0.3}{D}, \quad (\text{III-2})$$

where  $D$  is in millimeters and  $g$  is in  $(\text{m}^{-1})$ . This relationship has been measured independently at several laboratories and is reasonably accurate over the range of  $D$  from 1 to 10 mm.

The variation of power output with the various atomic and physical parameters (or measurable combinations of these parameters) has been discussed by Rigrod (Ref. III-5); White, Gordon, and Rigden (Ref. III-6); and Smith (Refs. III-7 to III-9). The latest work by Smith compares all three approaches and yields the most accurate comparisons with experiment. The development of the theory is given in Ref. III-7, the measurement of the critical medium parameters in Ref. III-9, and the comparison between theory and experiment in Ref. III-8. For a multimode laser (i.e.,  $\text{TEM}_{00}$  operation, but several longitudinal modes oscillating simultaneously), Smith finds the relation (Ref. III-7)

$$P_{\text{out}} = \frac{\pi D^2}{10} (Aw_0) G(1 - \sqrt{a/G})^2 \quad (\text{III-3})$$

where  $D$  is in millimeters,  $(Aw_0)$  is a constant with the empirically determined values of  $300 \text{ mW}/(\text{mm})^2$ ,  $G$  is the small-signal gain per pass ( $= gL$ ), and  $a$  is the loss per pass. The output coupling is assumed to be at its optimum value given by

$$t_{\text{opt}} = G(\sqrt{a/G} - a/G) \quad (\text{III-4})$$

From these relations, the power output and optimum coupling coefficient can be determined once the diameter, length, and cavity losses are specified. One assumption necessary to arrive at eqs. (III-3) and (III-4) that was not stated previously is that the optical mode cross-sectional area is assumed to be about 1/5 the physical tube area. This is a reasonable approximation for TEM<sub>00</sub> operation in the usual cavity configuration. Equations (III-3) and (III-4) are derived for the case of symmetrical mirrors, with equal outputs from each end. If the output is taken from one end only, a factor of two should be added to the right hand sides of both (III-3) and (III-4).

Similar relationships are expected to hold for the 1.15  $\mu$  and 3.39  $\mu$  transitions, but the values of  $Aw_0$  and  $gD$  have not been determined accurately for these lines.

Smith has obtained very good agreement (Ref. III-8) between eq. (III-3) and the actual output of several BTL lasers. He uses the value 0.3% for the loss per pass which is made up of 0.1% loss in the window and 0.2% in the mirror. Mirror losses this small are quite difficult to realize (although the group at BTL under Gordon has in fact produced mirrors with losses this small; these were the same mirrors used in the experiments Smith compares). A more realistic figure for mirror loss in the soft coating material is  $\approx 0.5\%$ , and for the hard materials 0.5 to 0.8%. Using these values we may compute an approximate design for the 5 mW laser required for this program. For a single ended output, eq. (III-3) becomes

$$P = 190 D^2 G (1 - \sqrt{a/G})^2 \text{ mW}, \quad (\text{III-5})$$

and eq. (III-4) becomes

$$t_{\text{opt}} = 2G (\sqrt{a/G} - a/G). \quad (\text{III-6})$$

Figure III-1 shows the output power to be expected from a 30.5 cm (12 in.) active length as a function of the single-pass loss for different bore diameters, as given by (III-5). The curves of course assume that the optimum output mirror transmission given by eq. (III-6) and shown in Fig. III-2 is used at each point. The same data are given in Figs. III-3 and III-4 for a 23 cm (9 in.) active length. These two lengths were used in tubes fabricated during the SQL program. We see that the total single-pass loss must be less than 2% to achieve 5 mW output from the 30.5 cm bore with diameters in the practical range 0.8 to 3 mm and less than 1.1% for the 23 cm bore. We also note that the behavior with diameter is not monotonic for optical

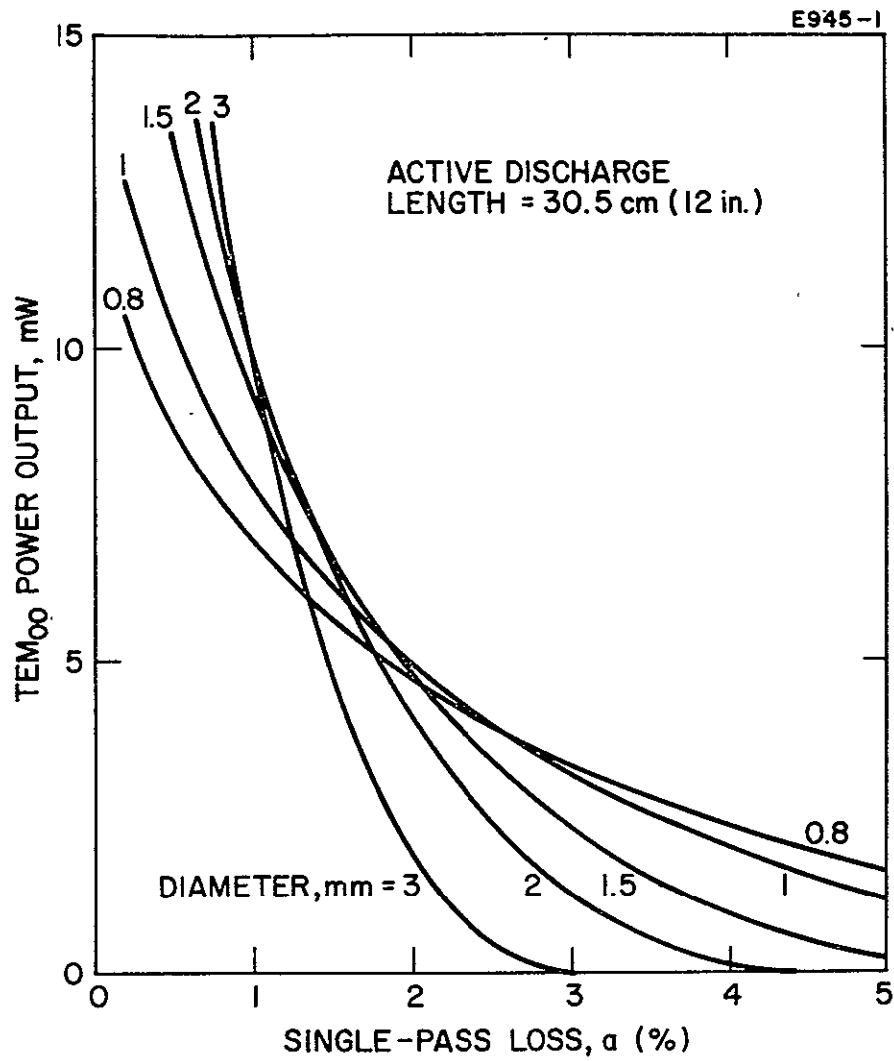


Fig. III-1. Power output as a function of loss parameter  $\alpha$ , for a 12 in. tube length.



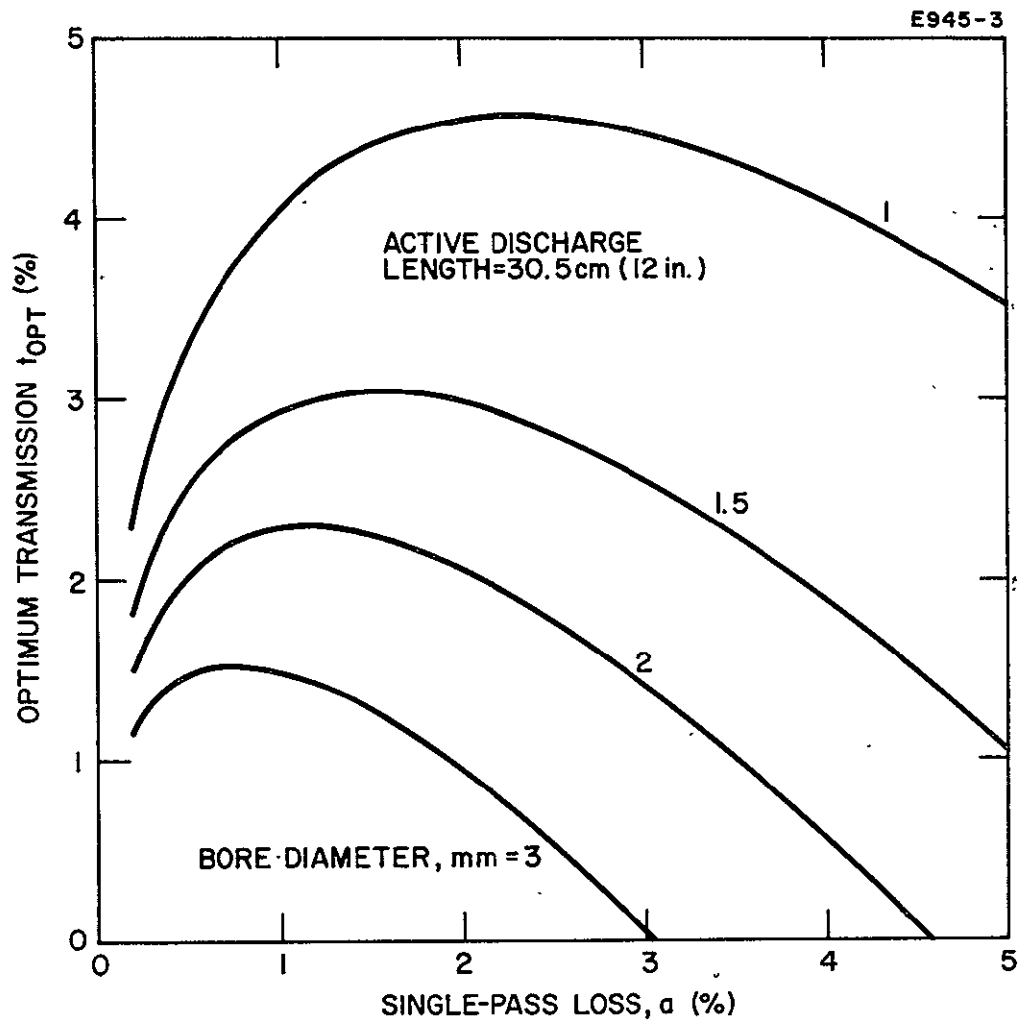


Fig.III-2. Optimum mirror transmission as a function of loss parameter  $\alpha$  for a 12 in. tube length.

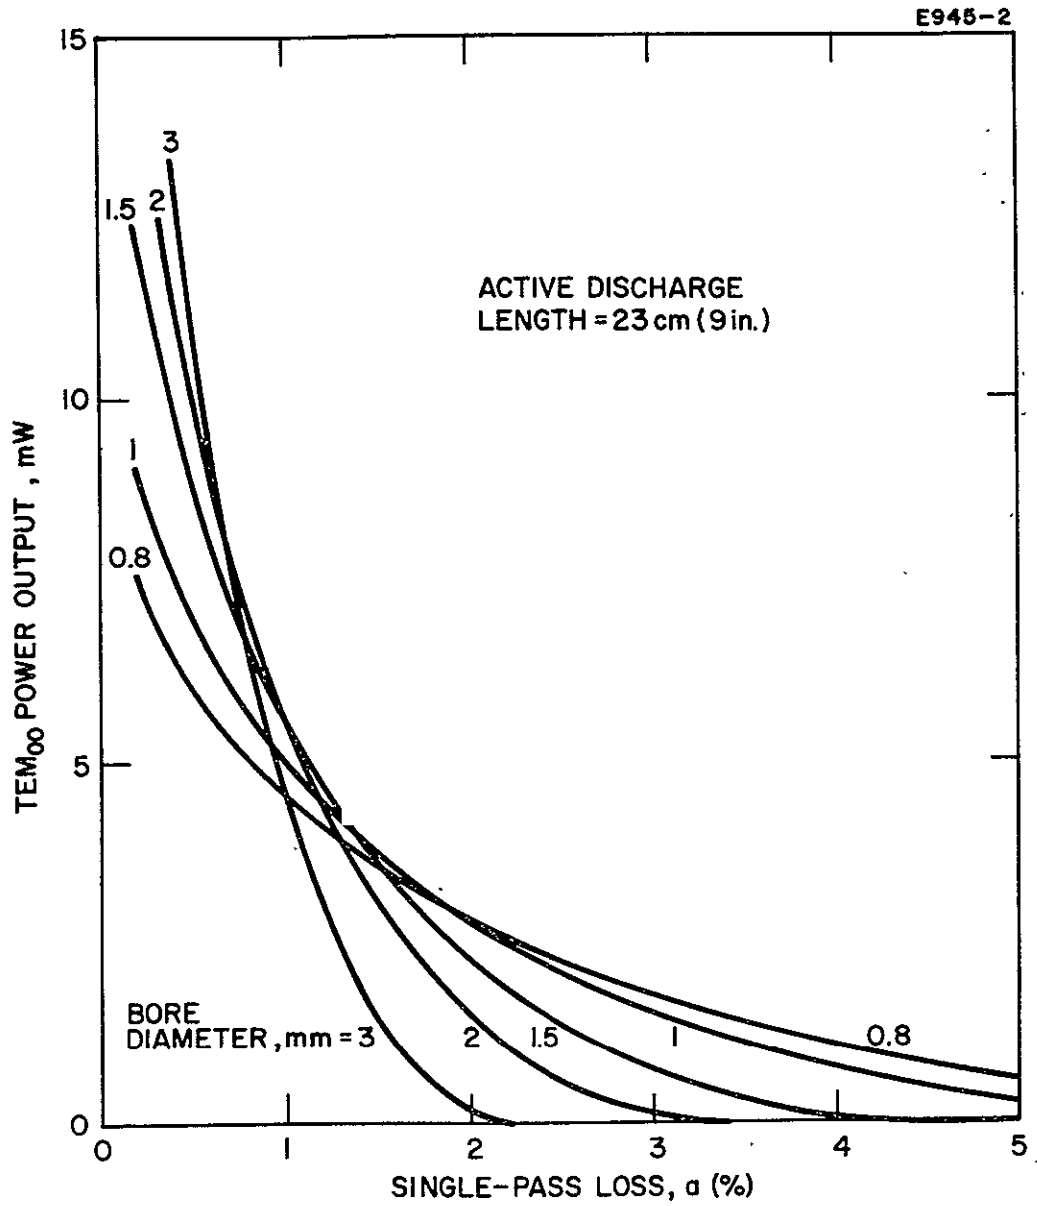


Fig. III-3. Power output as a function of loss parameter  $\alpha$ , for a 9 in. tube length.

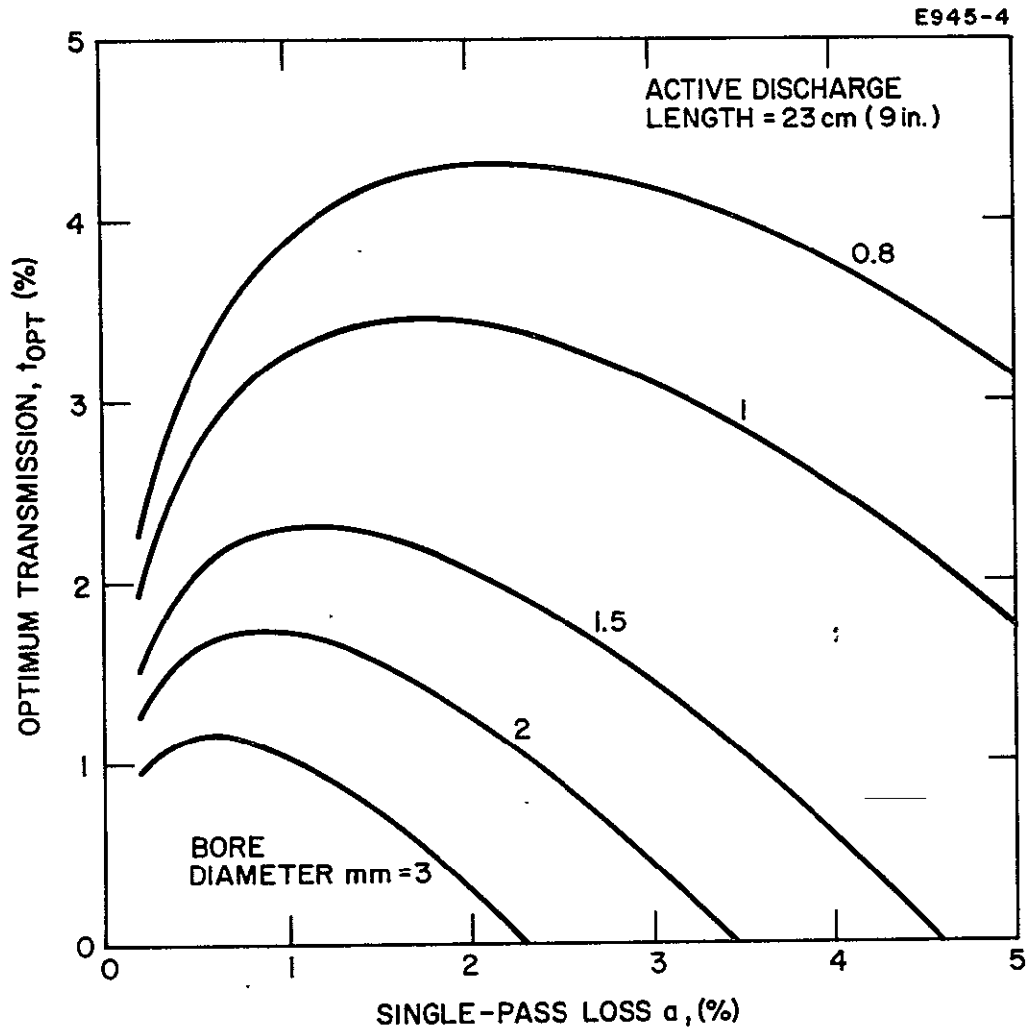


Fig. III-4. Optimum mirror transmission as a function of loss parameter  $\alpha$ , for a 9 in. tube length.

losses in the range which yields 5 mW output. Comparison with experiment is also complicated by the fact that the mirror transmission is not actually optimized at each point during the measurements. The results of measurements on tubes fabricated during the program are given in Section III-B.

## B. MEASUREMENT OF CRITICAL LASER DESIGN PARAMETERS

Several tube variations were fabricated under this program to check the designs made on the basis of the calculations given in the previous section. Tube diameters of 3, 2.5, 2, and 1.5 mm, and active bore lengths of 12 in. and 9 in. were used (although not all combinations of these diameters and lengths were tried). The most serious unknown parameter in attempting a comparison of the experiments with theory was the mirror loss  $\alpha$ . While mirrors with losses as low as 0.2% have been made, a more typical value for practical dielectric mirrors lies in the range from 0.5 to 1%. In addition, the limited selection of mirror transmissions readily available prevented the exact optimization for each set of diameter, length, and loss. Nevertheless, a reasonably good agreement with theory was obtained.

Reference to Fig. III-1 indicates that for total signal-pass losses (mirror plus Brewster's angle window) of about 1%, optimized output powers of 9 to 10 mW should be possible from 1.5 to 3 mm bore tubes with 30.5 cm active lengths. The corresponding optimum mirror transmission ranges from  $\approx 1.5\%$  to  $3\%$ . Figures III-5 and III-6 give the typical performance characteristics of 2 mm x 30.5 cm bore tubes. Power outputs in the range from 6 to 8 mW were obtained at various fill pressures. The output was obtained in the  $TEM_{10}$  mode, which does not exactly fit the theoretical assumptions, but should not be too far off. The mirror transmission used (0.8%) is also not in the optimum range  $\approx 2\%$ ; therefore, we may conclude that the optical losses are somewhat less than 1% and that more power would be realized by a 2% mirror with the same losses.

The optimum pressure of  $\approx 2$  Torr agrees reasonably well with the 1.5 to 1.8 Torr predicted by (III-1). Higher gas fills would be used in practice to slow down any sputtering cleanup of gas.

The degree of loss in power due to mode selection is indicated in Fig. III-7. For the mirror radii shown, approximately 20% reduction in output occurred from  $TEM_{10}$  to  $TEM_{00}$ . This effect is even smaller in the smaller bore (1.5 mm) tubes measured later in the program and proposed for the metal-ceramic design.

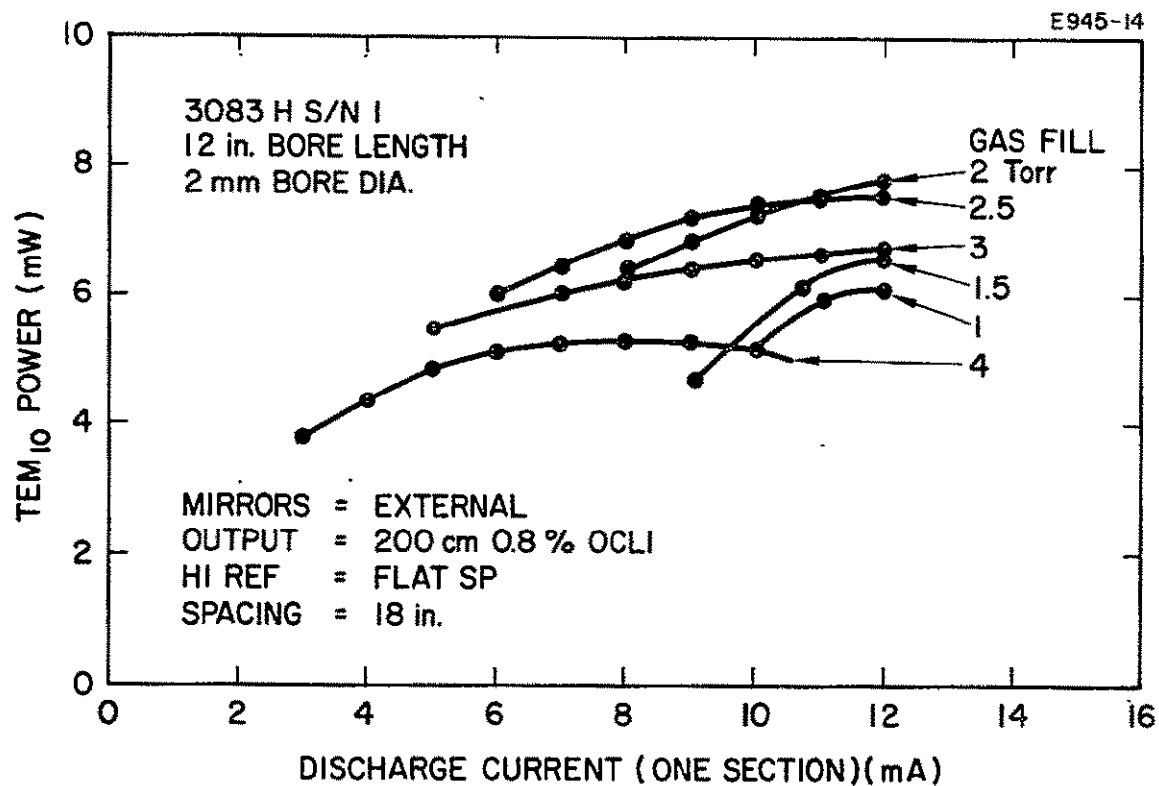


Fig. III-5. Measured power output as a function of discharge current for a 3083H glass tube (No. 1).

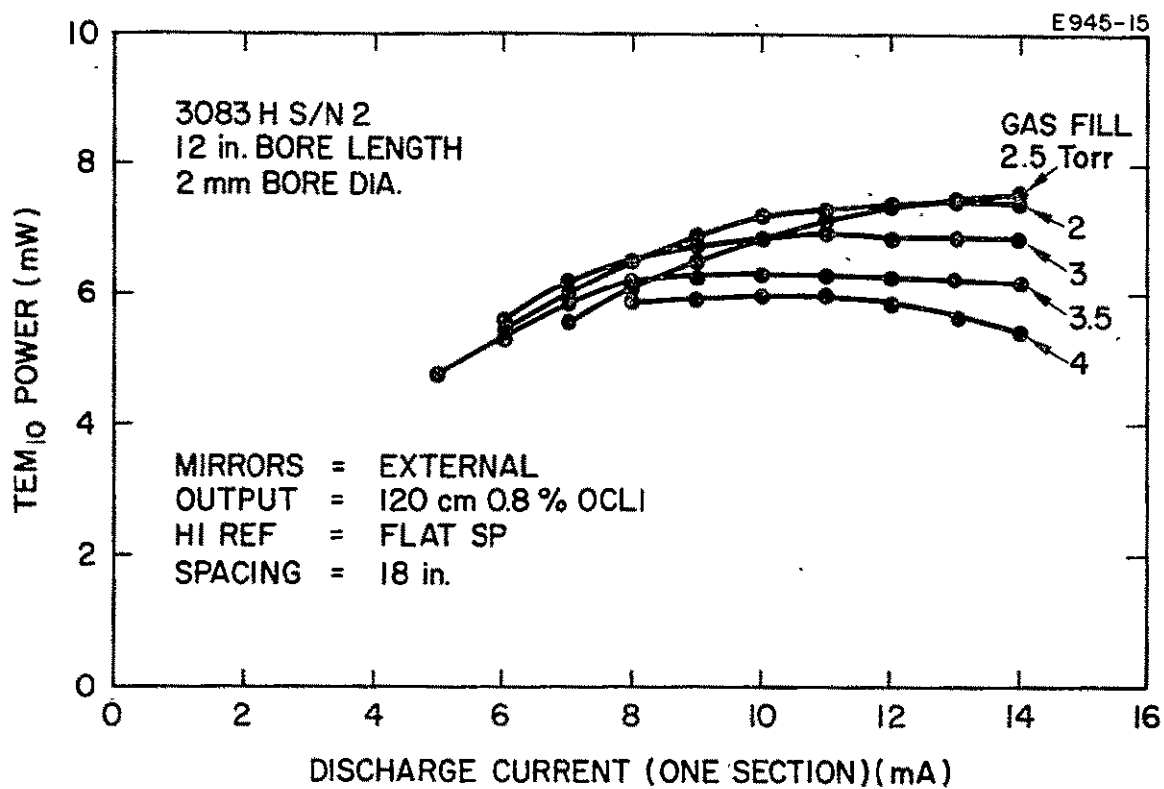


Fig. III-6. Measured power output as a function of discharge current for a 3083H glass tube (No. 2).

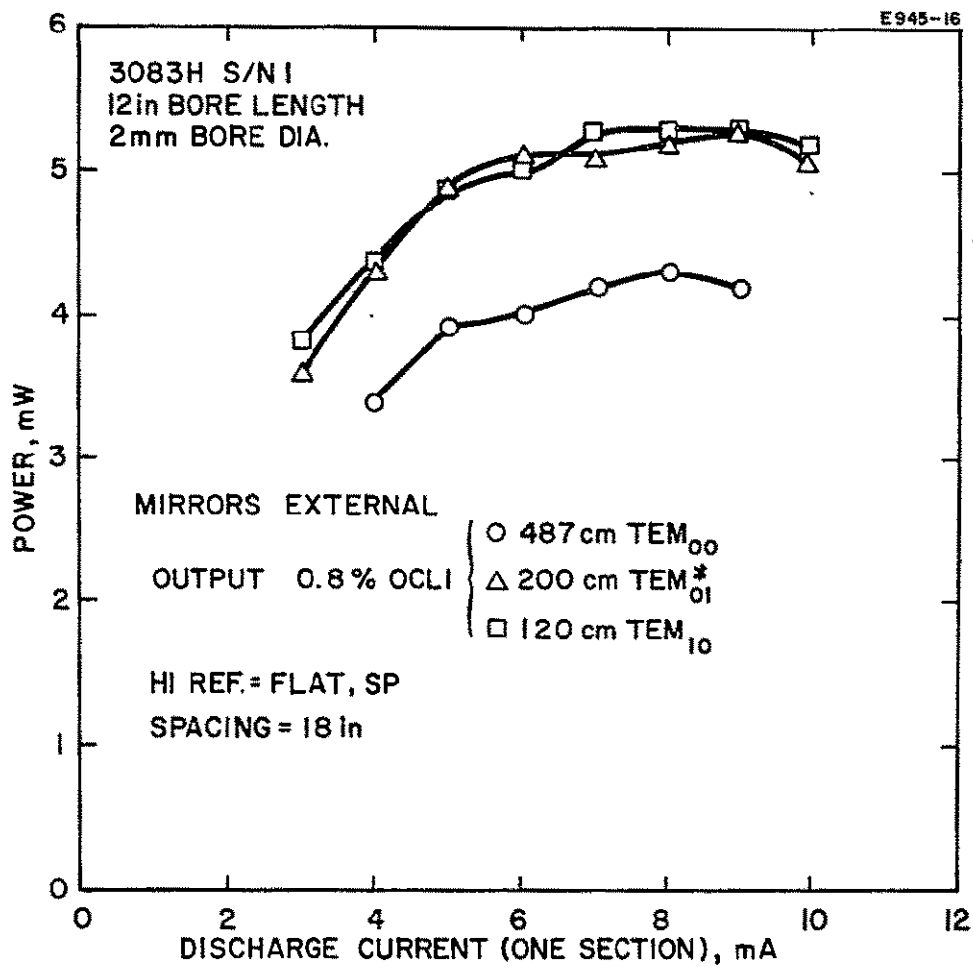


Fig. III-7. Measured output power for TEM<sub>00</sub>, TEM<sub>01</sub><sup>\*</sup>, TEM<sub>10</sub> modes for tube 3083H (No. 1).

Because we had realized 6 to 8 mW output in our early external mirror tubes, we felt that it would be proper to reduce the over-all tube length by 25%. The additional power needed to realize 5 mW output in the smaller bore length (9 in.) would be made up by using a smaller bore diameter and internal mirrors. Figures III-8 and III-9 confirm these conclusions. Figure III-8 shows the results obtained with a 3083H shortened from 12 in. to 9 in. active bore length and diameter decreased from 2 mm to 1.5 mm, but used with Brewster's angle windows. A maximum output of  $\approx 4$  mW was obtained, with the optimum pressure increasing and the optimum current decreasing in the proper ratio. Figure III-9 shows the effect of using the same mirrors and tube, but with the Brewster's angle windows removed and the mirrors epoxied directly onto the tube ends. Approximately 5.5 mW output is obtained with the best mirror combination. It is interesting to note that the theory predicts an optimum mirror transmission  $\geq 2\%$  for the loss range from 0.4% to 2%, while the experiment indicates that the power actually decreased when the transmission increased from 1% to 1.8%. Both mirrors were manufactured by Spectra-Physics, but it is possible that they have substantially different losses.

A comparison of output powers obtainable from the short 3083H type tubes at 0.6328, 1.15, and 3.39  $\mu$  is given in Fig. III-10. Slightly over 50% of the 0.6328  $\mu$  power is available at 1.15  $\mu$  and slightly under 50% is available at 3.39  $\mu$ . We do not know how closely these mirror transmissions approached the optimum values.

### C. LITERATURE REVIEW AND STATE-OF-THE-ART SUMMARY

No special literature search was made for this program since all personnel were actively engaged in development on helium-neon lasers at the program inception and were thoroughly familiar with publications in the field. A summary of the theory and scaling laws associated with He-Ne lasers was given in our proposal. The key publications on laser theory and scaling laws are Refs. III-1, III-2, and III-5 through III-10. Useful survey papers have also been written by Haisma (Ref. III-1) and Allen and Jones (Ref. III-12). Few good papers on technological problems have appeared; of those published, the most interesting are the papers on cold cathodes by Hochuli and Haldemann (Ref. III-13) and life limitations in rf excited He-Ne lasers by Turner, et al. (Ref. III-14). (The conclusions reached in Ref. III-14 are not all in agreement with unpublished observations on rf excited He-Ne made at Hughes Research Laboratories, particularly regarding cleanup rates with different wall materials.)



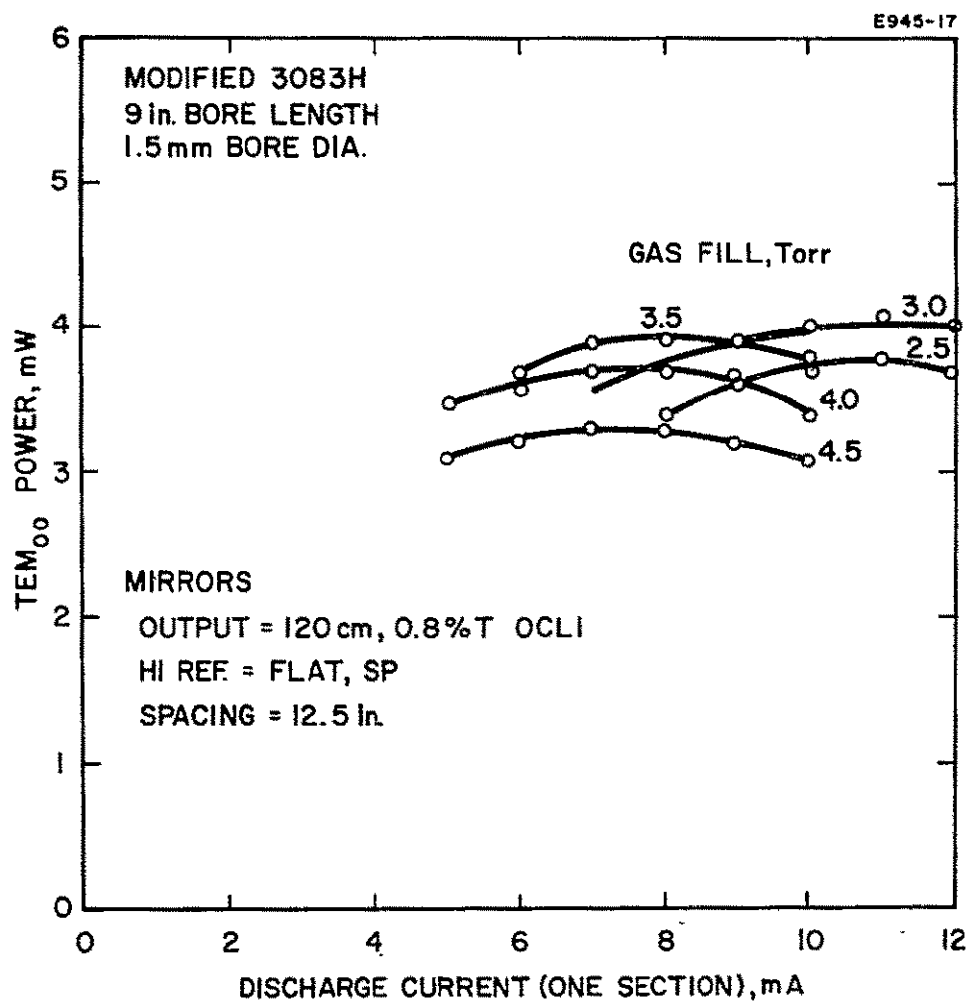


Fig. III-8. Measured TEM<sub>00</sub> power output for a short (9 in.) bore 3083H.

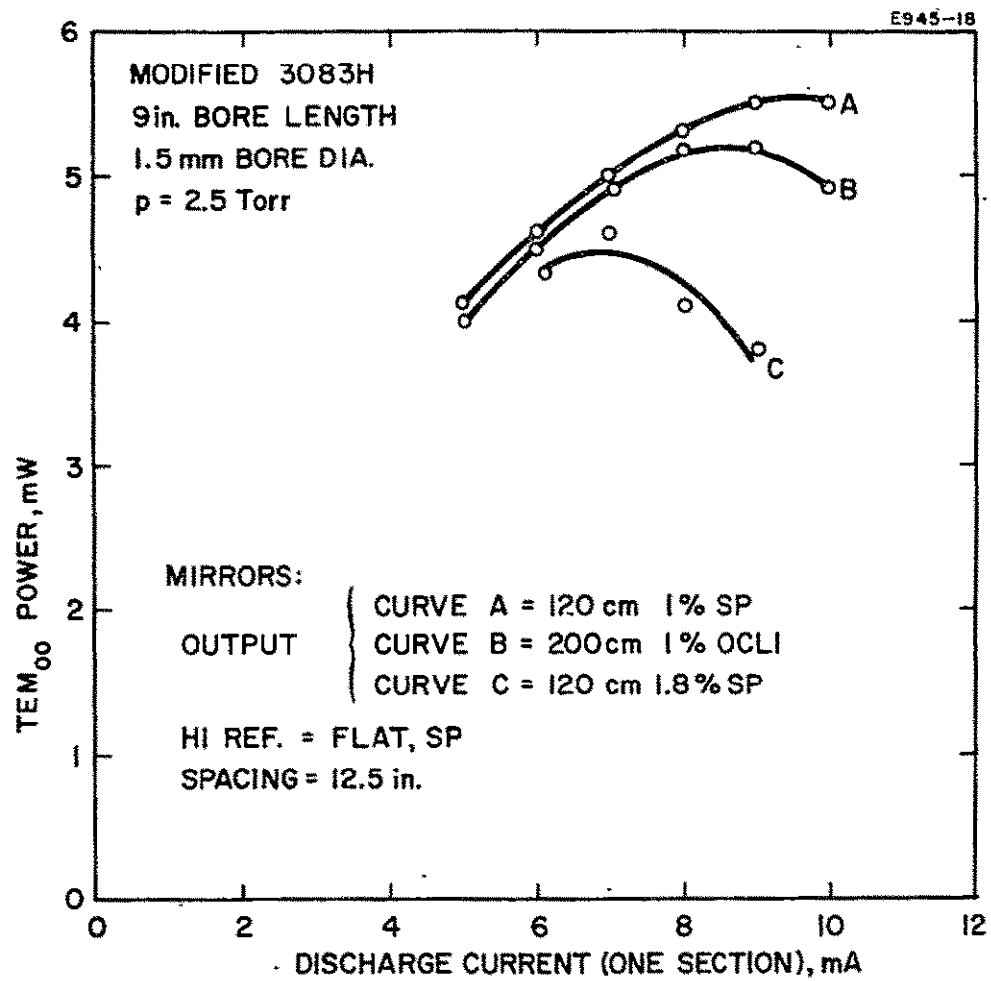


Fig. III-9. Measured TEM<sub>00</sub> power output for a short (9 in.) bore 3083H with different radius mirrors.

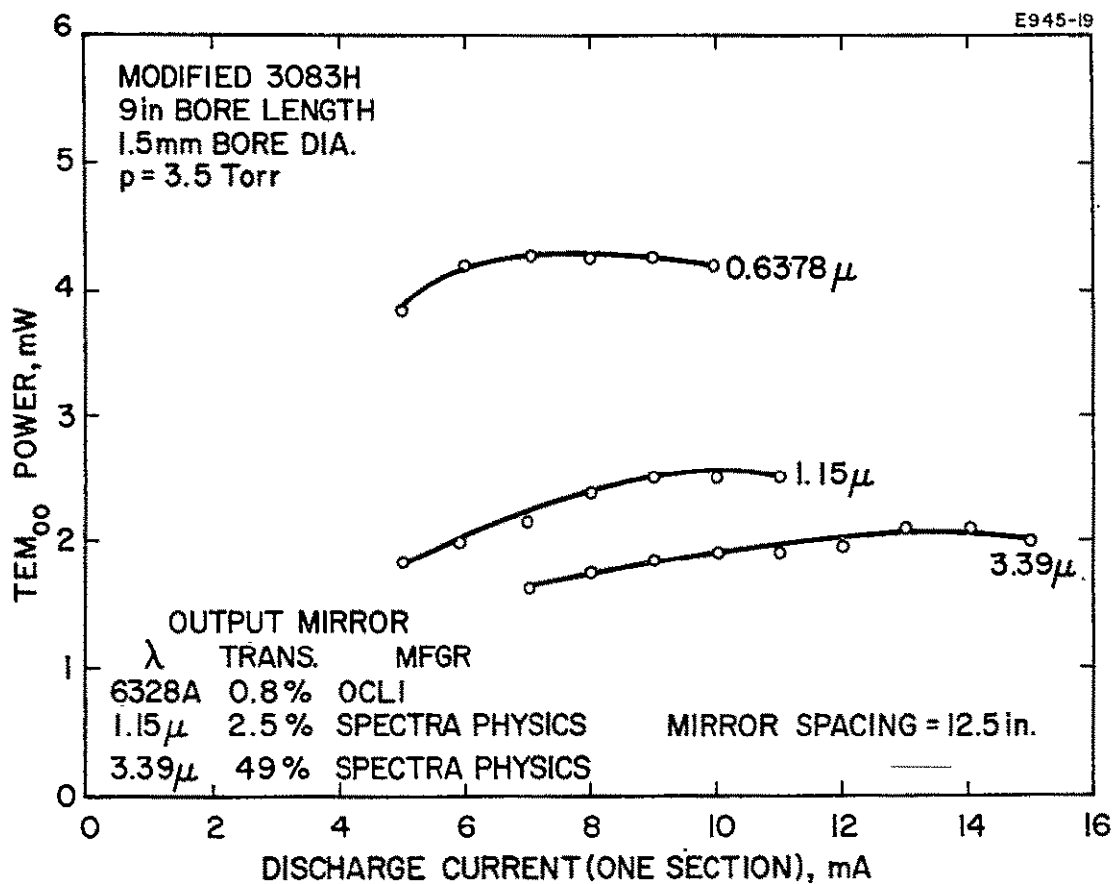


Fig. III-10. Measured TEM<sub>00</sub> output from a short (9 in.) bore 3083H at 0.63 $\mu$ , 1.15 $\mu$ , and 3.39 $\mu$ .

The state of the art in helium-neon lasers was assessed both from journal articles and also from commercial advertising brochures. Table III-1 summarizes the salient characteristics of commercially available He-Ne lasers, both foreign and domestic, with TEM<sub>00</sub> outputs in the range 1 to 10 mW. Direct comparison with the proposed SQL design is difficult because none of the lasers listed were designed for 5 mW output, space environment, or spacecraft power supply characteristics. The most notable is the Soviet ЛГ-56, with 2 mW TEM<sub>00</sub> output and a laser head weight of 2.65 lb. The descriptive brochure states that the laser "... is characterized by high resistivity to mechanical effects and to ambient temperature changes and can be used under conditions of considerable dust and moisture content." Furthermore, a temperature range of -30° to +40° C is quoted and dynamic mechanical limits of 4.5 g vibration (20-80 Hz), 15 g repeated shock, and 75 g single shock are quoted. "Precision light ranging" is mentioned as a possible application in the brochure. It is only recently that U.S. manufacturers have been concerned with the development of lasers for surveying and equipment guidance.

It is evident from the specifications given for the proposed Hughes 3072H SQL that it exceeds the commercial state of the art in specific power output per unit length, power output per unit weight, efficiency, and life. While somewhat greater powers have been observed in laboratory versions of this length, we believe the proposed 3072H design specifications represent a realistic and reproducible set of operating characteristics obtainable in severe environments.

#### D. SUMMARY OF VISITS TO NASA FACILITIES

Conferences were held with (1) NASA Headquarters, Washington, D.C.; (2) Electronic Research Center, Cambridge, Massachusetts; (3) Marshall Space Flight Center, Huntsville, Alabama; and (4) Manned Spacecraft Center, Houston, Texas, during the fifth month of Phase I. The purpose of these meetings was to solicit suggestions concerning the laser performance specifications, environmental conditions, and physical configuration as these factors pertain to definitive requirements. The proposed laser specifications and design approach were reviewed, and an operable prototype for the tentative design was demonstrated. The following NASA personnel were in attendance at the above listed centers.

##### 1. NASA Headquarters, Washington, D. C.

H. L. Anderton  
J. Meson  
H. Fosque  
H. H. Plotkin

TABLE III-1

## Commercial Laser Characteristics

| Manufacturer      | Model Number | Power                  |                        | Head       |                                     | Power Supply     |                    | Life       | Input Power, W | Brochure Date | TEM <sub>00</sub> Power, mW<br>Length, in. |
|-------------------|--------------|------------------------|------------------------|------------|-------------------------------------|------------------|--------------------|------------|----------------|---------------|--|
|                   |              | TEM <sub>00</sub> , mW | TEM <sub>mn</sub> , mW | Weight, lb | Size L x D or L x W x H (in inches) | Weight, lb       | Size, in           |            |                |               |  |
| CSF               | F9094        | 1                      | 2                      | 2.65       | 13.4 x 2.4                          | 14               | ?                  | ?          | ?              | 1967          | 0.075                                      |
| EIMAC             | 300          | 1                      | -                      | ?          | 14.5 x 1.9                          | ?                | 12.8 x 13.8 x 9    | 2000 hours | 165            | 1966          | 0.069                                      |
| EIMAC             | 303          | 3                      | -                      | ?          | 25 x 1.9                            | ?                | 12.8 x 13.8 x 9    | 2000 hours | 165            | 1966          | 0.12                                       |
| EOA               | LAS102       | 1                      | 2                      | 3          | 13.5 x 2                            | ?                | ?                  | 2000 hours | ?              | 1966          | 0.074                                      |
| Ferranti          | GP-2         | 1                      | -                      | 11         | 20.3 x 5.4 x 6.2                    | included in head |                    | 500 hours  | ?              | 1967          | 0.049                                      |
| Ferranti          | SL-5         | 2.5                    | -                      | 6.6        | 18 x 3.5 x 2.9                      | 20               | ?                  | 500 hours  | ?              | 1967          | 0.139                                      |
| Jodan             | GL-60        | 3                      | -                      | ?          | >22                                 | ?                | ?                  | ?          | ?              | 1967          | <0.136                                     |
| OTI               |              |                        |                        |            |                                     |                  |                    |            |                |               |  |
| Perkin-Elmer      | 5600         | 1.3                    | -                      | 5.5        | 17.5 x 2.25                         | 20               | 12 x 6 x 14        | 1 year     | 80             | 1967          | 0.074                                      |
| Perkin-Elmer      | 5300         | 8                      | 15                     | 34         | 36 x 4                              | 20               | 12 x 6 x 14        | 1 year     | ?              | 1965          | 0.222                                      |
| Quantum Physics   | LS-30        | 1.5                    | 4                      | 10 total   | 13 x 3 x 4.5                        | included in head |                    | 1 year     | ?              | 1967          | 0.116                                      |
| Quantum Physics   | LS-31        | 2                      | 6                      | 14 total   | >14 x 1.75                          | -                | 4.5 x 8 x 7        | 1 year     | ?              | 1967          | <0.143                                     |
| Quantum Physics   | LS-35        | 7                      | 15                     | 18 total   | >24 x 2.5                           | -                | 4.5 x 8 x 10       | 1 year     | ?              | 1967          | <0.292                                     |
| Radiation Physics | RPI-75       | 7                      | -                      | 15 total   | 24 x 2                              | -                | 3 x 6 x 8          | 1 year     | ?              | 1967          | 0.292                                      |
| Siemens           | LG-64        | 1                      | 10                     | 11         | 26.2 x 5.1 x 4.8                    | 28               | 14.4 x 7.5 x 7.4   | 1000 hours | ?              | 1966          | 0.038                                      |
| Spectra Physics   | 122          | 3                      | -                      | 10         | 16 x 3.3 x 3.3                      | 4.5              | 4.2 x 3 x 12       | 1 year     | 125            | 1967          | 0.188                                      |
| Spectra Physics   | 123          | 7                      | -                      | 15         | 22 x 3.3 x 3.3                      | 4.5              | 4.2 x 3 x 12       | 1 year     | 180            | 1967          | 0.318                                      |
| U.S.S.R.          | IT-56        | 2                      | -                      | 2.65       | 13.7 x 2.3                          | 11               | 11.7 x 5.9 x 5.9   | 500 hours  | 66             | 1966          | 0.146                                      |
|                   | IT-126       | 10                     | -                      | 31         | 37 x 5.7                            | 44               | 20.5 x 13.8 x 11.4 | 500 hours  | 500            | 1967          | 0.27                                       |
| Hughes            | 3072H        | 5                      | -                      | 11         | 16 x 3 x 8                          | included in head |                    | 10,000     | 30             | 1968          | 0.313                                      |

2. Electronic Research Center, Cambridge, Massachusetts

|             |             |
|-------------|-------------|
| P. Hanst    | P. Ryan     |
| R. Paananen | T. Lawrence |
| P. Fletcher | W. Laurie   |
| J. Morneal  | S. Korp     |
| J. Early    |             |

3. Marshall Space Flight Center, Huntsville, Alabama

P. Marrero  
E. Reinbolt  
D. Lee

4. Manned Spacecraft Center, Houston, Texas

D. Lilly  
R. Hotz  
R. Kelly  
E. Walters  
H. Erwin  
S. Derry

Hughes personnel making the presentation were

W.B. Bridges (Project Manager)  
R.A. Brennan  
W.P. Kolb  
A.G. Peifer  
T. Hummel (at ERC, MSFC, MSC)  
C.J. Eliades (at ERC)  
J. Juncker (at MSFC)  
C. McKinney (at HQ)

A copy of the Hughes proposal and a questionnaire were submitted to the above centers for review prior to the meetings. It was hoped that future requirements for a space He-Ne laser could be tentatively defined as to the performance and environmental conditions.

Only a little information on future specifications was available, however, since the specific space projects discussed were not far enough along to generate firm specifications. As pointed out in Appendix A, each mission will generally define a special set of requirements if the mission goals are specified in advance of the component development. Table II of Appendix A lists the environmental specifications for many of the space traveling-wave tubes built by the Electron Dynamics Division of Hughes Aircraft Company. However, it is believed that the goals set forth for this program are realistic and once the laser is qualified, many space experiments can be designed around the laser specification.

In reviewing the proposed design, the following comments were discussed. All centers were in agreement that the two-anode design approach which makes possible power supply redundancy was a good feature. This feature allows operating the laser at reduced power upon command and can be used to perform certain experiments. In addition, for communication experiments, consideration should be given in the future to a means of modulating the optical output. This is discussed in Section II-C.

The operational temperature range specified in Exhibit D of the RFP from  $-107^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$  could be relaxed for any projected applications. The recommended temperature range based upon prior experience is a deviation of  $50^{\circ}\text{C}$ , as indicated in Table II of Appendix A. However, the center temperature of this  $50^{\circ}\text{C}$  will vary from mission to mission.

The operational model demonstrated at the centers was representative of the design approach. Refinement of this design has resulted in reduction of the over-all package length to 16 in. and a square cross sectional outline. A rectangular cross section is proposed as an alternative. It was the general feeling that a square cross-sectional package would probably be more suitable for integrating with the spacecraft.

#### E. CONTACTS WITH NON-NASA PERSONNEL

In private conversations with W.B. Bridges, E.I. Gordon of Bell Telephone Laboratories reported that life tests are continuing there on both hot and cold cathode He-Ne lasers. Elapsed time on these lasers is in excess of 5000 hours.

A conference was held at EDD with T. Musset and D. Morelli, Optical Coating Laboratories, to discuss hard coated ultraviolet-resistant mirrors for use in internal mirror lasers. Such mirrors have been subjected to experiments at OCLI to verify initial operation and have been found satisfactory. Subsequently, we obtained samples of these coatings from OCLI and have also found them satisfactory.

Dr. U. Hochuli, University of Maryland, was visited by A.G. Peifer to discuss results of the extensive cold cathode experiments being performed there. The experiments are essentially an extension of those reported at the conference on Laser Engineering and Applications, Washington, D.C., June 1967. The results, although pertaining to aluminum cathodes, certainly add validity to the proposition that cold cathode He-Ne lasers can have extremely long life. This is also verified by Hughes life tests using cold cathode devices.

## F. LIFE TESTS AND CATHODE STUDIES

At the beginning of the program, life tests were already under way on the Hughes Model 3082H tubes, shown in Fig. III-11. This tube is manufactured by Hughes for the K & E alignment laser. The cold cathode used in this tube is oxidized tantalum hollow cathode structure which had proven reliable in several previous tube designs. The proposed SQL design required approximately twice the active bore length, so that a structure consisting of two 3082H tubes joined at the open end of the cathode (left end on Fig. III-11) was proposed. The resulting glass tube, now designated type 3083H, is shown in Fig. III-12. Eight such tubes were fabricated on the program: SQL s/n-1 through s/n-6, and 3083H s/n 1 and 2. In addition, two modified 3083H tubes (identical to that in Fig. III-12 but 3 in. shorter) were built. Of these tubes, SQL s/n 2, s/n 3, s/n 4, and s/n 6 were placed on life test during the contract term. The over-all results are summarized in Table III-2.

The 3082H tubes are all still operating with no change in V-I or laser output characteristics (except for s/n 13, which apparently developed a leak). The SQL (3083H type) tubes all failed on life test in 400 to 1300 hours because of gas cleanup. Spectroscopic examination of the discharge after laser action had ceased proved that no contaminants were present — only helium and neon emission lines were seen. These four tubes were subsequently taken apart and the cathodes were examined. It was quite evident from a visual examination of the inside of the cathode can that insufficient oxidation of the surface had occurred during the processing cycle. Consequently, the cathodes had sputtered at the rate determined by pure tantalum, and gas cleanup occurred in a short time. (The 160 hour life of s/n 3 probably can be attributed to an experimental cathode configuration which has subsequently proven unsatisfactory.) To confirm that the lack of proper oxidation occurred during the process cycle and not by removal during tube operation, 3083H type cathodes were run through the normal process cycle and then cut open without being run in a discharge tube. The insides of the cathodes were usually shiny metal, with no trace of the dull grey surface characteristic of the properly oxidized surface. We conclude that the change in geometry introduced by closing both ends of the cathode can prevented adequate oxidation of the inner surface when processed with the 3082H process cycle. A special fixture was made to assure oxygen entry into this region, but no cathodes have yet been processed with the new schedule and equipment. It is quite clear from the successful operation of the 3082H tubes that proper cathode processing will result in a life greater than 7000 hours.



M 5920

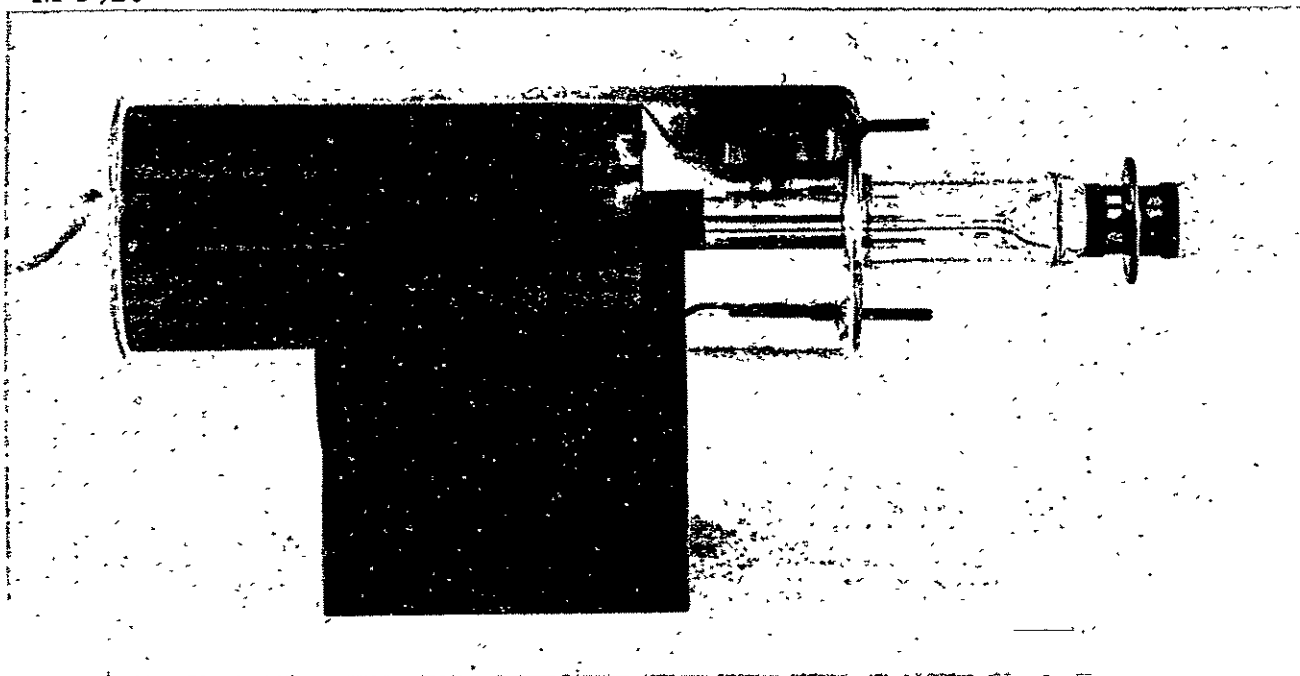


Fig. III-11. Hughes Model 3082H discharge tube.

M 5919

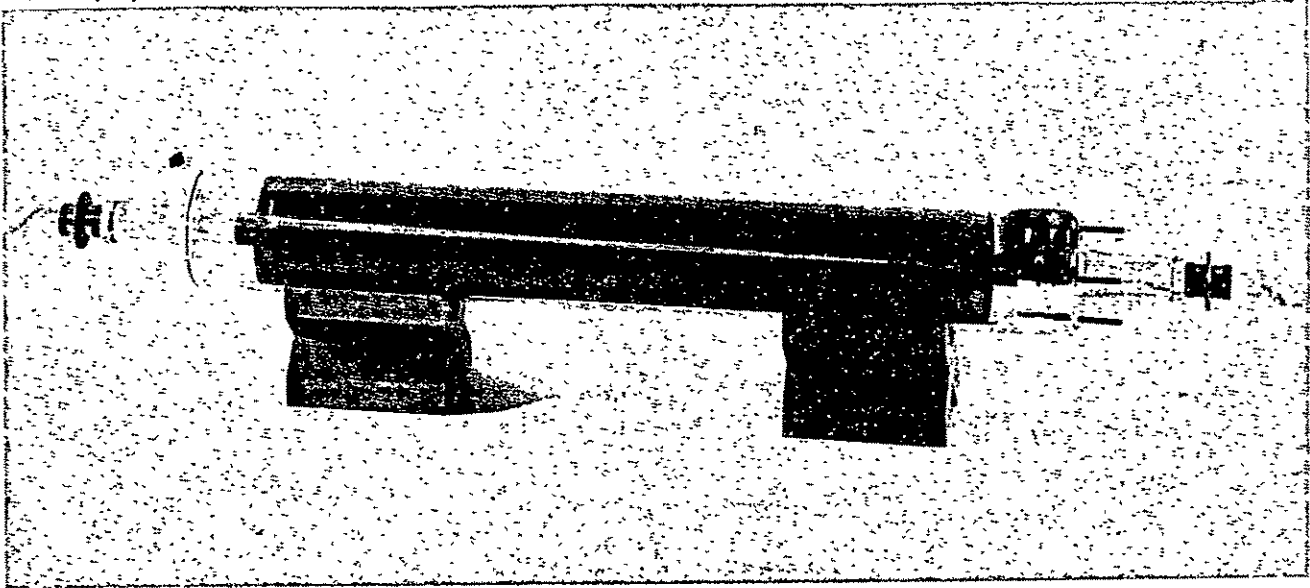


Fig. III-12. Hughes Model 3083H discharge tube

TABLE III-2

Life Test Results (to 18 January 1968)

| Type  | S/N | Feature                   | Status  | Hours | Comment                       |
|-------|-----|---------------------------|---------|-------|-------------------------------|
| 3082H | 5   | -                         | Running | 7062  | No change                     |
| 3082H | 13  | -                         | Failed  | 1450  | Contamination,<br>Dev.. Leak. |
| 3082H | 25  | -                         | Running | 2872  | No change                     |
| 3082H | 27  | Current Mod.<br>at 10 kHz | Running | 2801  | No change                     |
| 3082H | 43  | -                         | Running | 521   | No change                     |
| SQL   | 2   | -                         | Failed  | 1347  | Gas cleaned up                |
| SQL   | 3   | Reentrant<br>Cathode      | Failed  | 161   | Gas cleaned up                |
| SQL   | 4   | Ceramic<br>Bore           | Failed  | 404   | Gas cleaned up                |
| SQL   | 6   | -                         | Failed  | 435   | Gas cleaned up                |

A vibration shake test was also run on two additional type 3082H tubes to insure that the cantilever bore was not a weak point. Both tubes survived sinusoidal vibration in three mutually perpendicular axes at 0.2 in double amplitude in the range 5 to 30 Hz, and 8.6 g in the range 30 to 2000 Hz. The vibration frequency was swept up and back at a rate of 1 octave/min. In addition, vibration was continued for 2 min. at each main resonance. One tube suffered a spotweld failure at a cathode lead. We may conclude that the cantilever bore (which will be even shorter and better supported in the 3072H) will cause no problems.

#### G. MIRROR MEASUREMENTS AND FABRICATION TECHNIQUES

It is quite evident from Figs. III-1 and III-3 that obtaining dielectric coated mirrors with the lowest possible losses is crucial to the realization of a high performance laser. For this reason, we

attempted to compare the best mirror coatings for their performance, both in external mirror lasers and internal mirror lasers. The latter test was necessary to determine if the discharge ultraviolet or other possible discharge agents would degrade the mirror performance with operation. The problems of ultraviolet mirror degradation were discussed at length with Dr. T. Musset of Optical Coating Laboratories, Inc., Santa Rosa, California, who recently has been concerned with mirror development for internal mirror He-Ne lasers. OCLI has developed special ultraviolet-resistant coatings for such lasers which, at the same time, retain the "hardness" and durability of the standard  $\text{TiO}_x\text{-SiO}_x$  coatings. Normal and ultraviolet-resistant hard coatings were obtained from OCLI and soft coatings from Spectra-Physics, Mountain View, California, for evaluation. Table III-3 lists the characteristics of the mirrors compared. The last five mirrors in the list are dielectric-coated Brewster's angle half-prisms of the type proposed for the final design. The remaining mirrors were coated on standard 15 mm diameter by 11 mm thick fused-silica substrates.

It would have been most desirable to have a full range of transmissions and radii of curvature from each manufacturer so that mirror loss alone could be compared. Considerations of economy and delivery time limited our selection somewhat to mirrors and substrates on hand or readily available. Because of the variability of transmission in the Spectra-Physics commercial coatings, we were able to cover a somewhat larger range of transmissions than we originally thought. Figure III-13 compares output powers for a few of the mirrors measured. It would appear that about 1% transmission was the optimum value for this laser; however, such a conclusion would require that the losses in the mirrors compared all were equal and that the same cavity mode oscillated each time. For 200 and 300 cm mirrors the modes were similar and of the order of  $\text{TEM}_{20}$  in a 3 mm tube. The higher power output of the 120 cm mirrors shown on Fig. III-13 results from the larger filling factor of the  $\text{TEM}_{40}\text{-TEM}_{50}$  modes typical in a 3 mm tube. These experiments were performed with the test rig shown in Fig. III-14 (tube SQL s/n-1 in place) which could be run as an internal mirror laser or Brewster's angle window laser. The latter arrangement was used for most of the comparisons; the internal-mirror comparisons reported in Section III-B were all made with sealed-off tubes.

From several intercomparisons of both output and high reflectance mirrors, we determine that the best hard coatings, both normal and ultraviolet-resistant, performed as well as the best soft coatings. Both produced satisfactory output power (better power per unit length than the best lasers listed in the state-of-the-art survey, Section III-C).

The coated prisms were also compared among themselves and with dielectric-coated flat mirrors. A typical comparison is shown in Fig. III-15. From these and other runs we conclude that the best coated prisms are almost as good as the best flat mirrors and would

TABLE III-3  
Mirror Characteristics

| S/N  | MFGR | Radius,<br>cm | Trans.<br>Nom., % | Trans.<br>Meas., % | Comment                    |
|------|------|---------------|-------------------|--------------------|----------------------------|
| 314  | OCLI | 200           | 0.7               | 0.6                | Normal, hard coating       |
| 315  | OCLI | 200           | 0.7               | 0.6                | Normal, hard coating       |
| 318  | OCLI | $\infty$      | <0.01             | <0.01              | Normal, hard coating       |
| SP-A | SP   | 300           | 1.6               | 2.0                | Commercial, soft coating   |
| SP-B | SP   | 300           | 1.6               | 2.3                | Commercial, soft coating   |
| SP-C | SP   | $\infty$      | 0.05              | <0.1               | Commercial, soft coating   |
| SP-D | SP   | $\infty$      | 0.05              | <0.1               | Commercial, soft coating   |
| SP-E | SP   | 120           | 0.5               | 1.0                | Commercial, soft coating   |
| SP-F | SP   | 120           | 0.5               | 0.7                | Commercial, soft coating   |
| SP-G | SP   | 300           | 1.6               | 1.5                | Commercial, soft coating   |
| SP-H | SP   | 300           | 1.6               | 2.4                | Commercial, soft coating   |
| 0-1  | OCLI | 200           | 1.0               | -                  | UV-Resistant, hard coating |
| 0-2  | OCLI | $\infty$      | 1.0               | -                  | UV-Resistant, hard coating |
| 0-3  | OCLI | 200           | 1.0               | -                  | UV-Resistant, hard coating |
| 0-4  | OCLI | 487           | 1.0               | -                  | UV-Resistant, hard coating |
| 0-5  | OCLI | $\infty$      | 0.001             | -                  | UV-Resistant, hard coating |
| 0-6  | OCLI | $\infty$      | 0.001             | -                  | UV-Resistant, hard coating |
| 0-7  | OCLI | $\infty$      | 0.001             | -                  | UV-Resistant, hard coating |
| 0-8  | OCLI | 200           | 0.001             | -                  | UV-Resistant, hard coating |
| SP-X | SP   | $\infty$      | 0.05              | (prism)            | Normal, soft coating       |
| SP-Y | SP   | $\infty$      | 0.05              | (prism)            | Normal, soft coating       |
| SP-Z | SP   | $\infty$      | 0.05              | (prism)            | New type, hard coating     |
| 0-X  | OCLI | $\infty$      | < .01             | (prism)            | UV-Resistant, hard coating |
| 0-Y  | OCLI | $\infty$      | < .01             | (prism)            | UV-Resistant, hard coating |

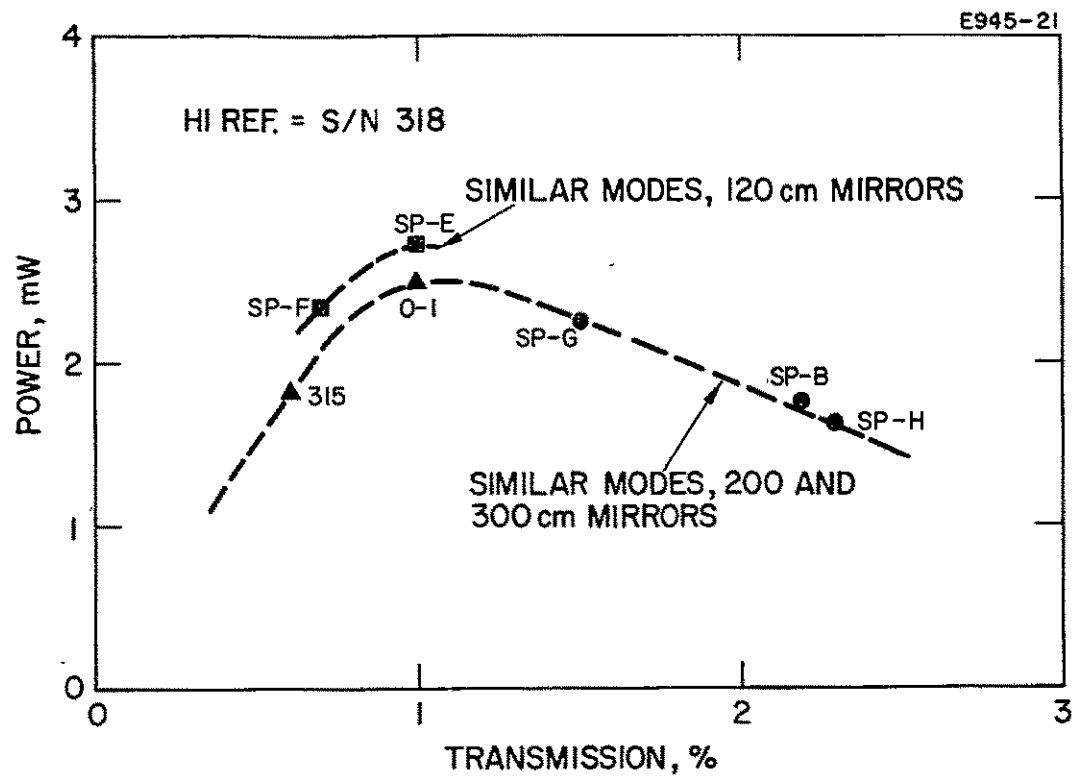


Fig. III-13. Output power as a function of mirror transmission (tube SOL S/N 1).

M 5713

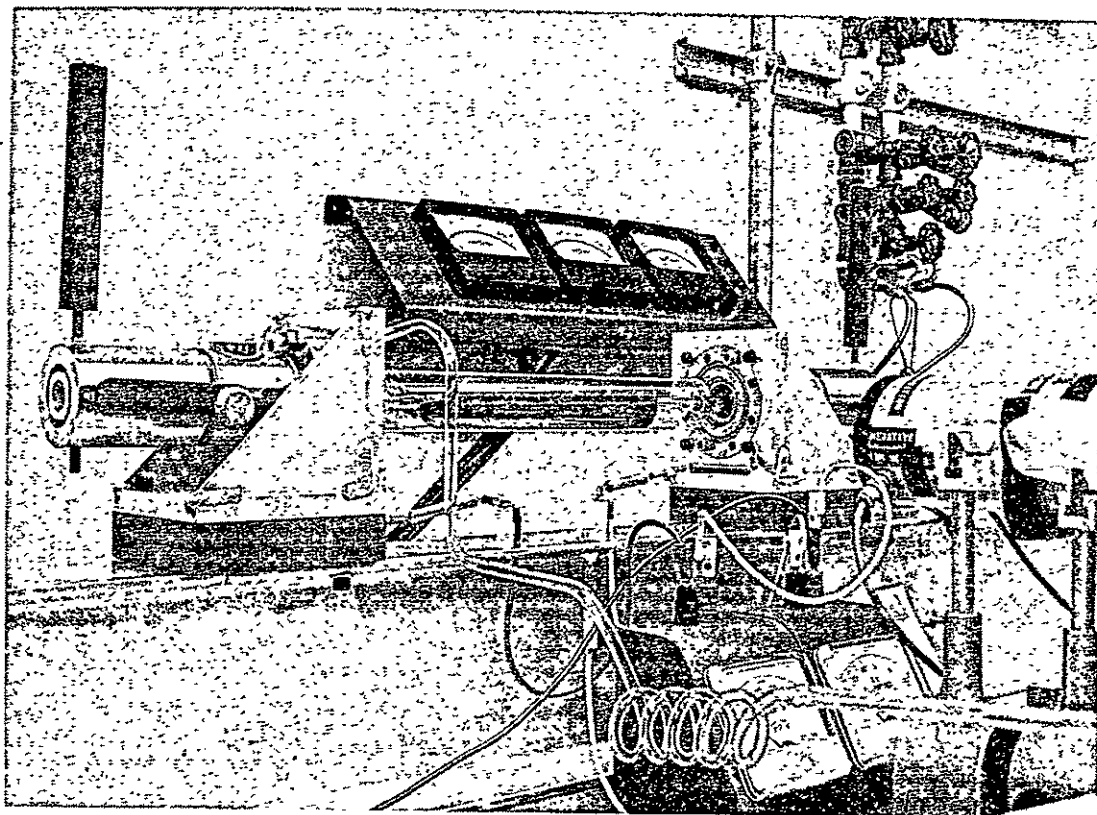


Fig. III-14. Mirror test laser used at beginning of program. Tube shown is SQL S/N 1.

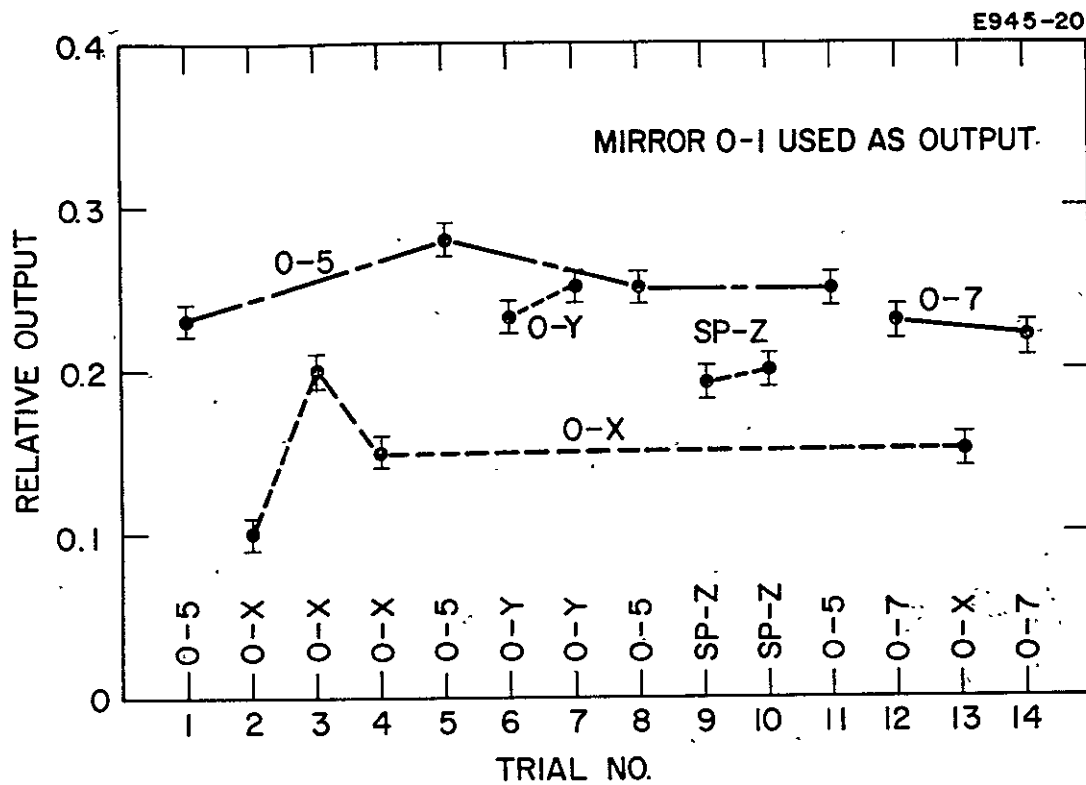


Fig. III-15. Relative output for several mirrors and coated Brewster angle half-prisms. Measurements were all taken in the sequence shown to assure no changes in output from sources other than mirror loss.



undoubtedly be better than a flat mirror-plus-Brewster's angle window. We had hoped to make this last comparison directly, but did not have sufficient time.

In addition to verifying satisfactory operation of existing coatings, a technique was worked out for sealing the output mirror (or window) onto the laser without the need for epoxy or other cement. The technique developed allows heliarc welding of the mirror onto the completed metal-ceramic tube as the final assembly step, thus assuring the cleanest possible tube and mirror surfaces. Figure III-16 shows a cross section drawing and a picture of the mirror blank. In this technique, a plug of Corning 7052 Kovar sealing glass is wetted onto a Kovar eyelet, and then both front and back surfaces are ground and polished. After coating, the Kovar flange is heliarced to a similar flange on the completed metal-ceramic envelope. Sixteen mirror blanks were fabricated in this manner; several were examined for strains or distortion in a Twyman-Green interferometer after polishing and also after welding to the vacuum test fixture shown in Fig. III-17. No distortion was observed in any case. Ten blanks were sent to OCLI for grinding (to 200 cm spherical surface) and coating. Unfortunately, these mirrors were not received in time to be compared for output power with the other mirrors used in the test rig. However, these metal-to-metal mirrors are being used on the metal-ceramic envelope now being assembled..

An alternative technique was also investigated and found satisfactory (although somewhat more bulky). Figure III-18 shows a cross section view of a mirror assembly fixture using a metal V-seal\* used in checking this concept with a quartz flat. A calculated compression in the V-ring is achieved by close control of the fixture dimensions. The spring metal base of the V-ring maintains this pressure even under wide temperature variations, while the ductile metal plating on the ring supplies the seal. We feel this method is a satisfactory alternative to the heliarced mirror, although it requires a somewhat more massive structure to handle the compressive forces. The V-seal also would be attractive in lasers requiring mirror substrates other than 7052 glass (for example, the CO<sub>2</sub> laser).


#### H. POWER SUPPLY TEST RESULTS

The proposed power supply design was discussed in detail in Section II-D. In this section we present test results on a breadboard version of one complete section. (In addition to this breadboard

---

\* Trade name of Parker Metal V-Seal Rings, Parker Seal Company, Culver City, California.

E945-22

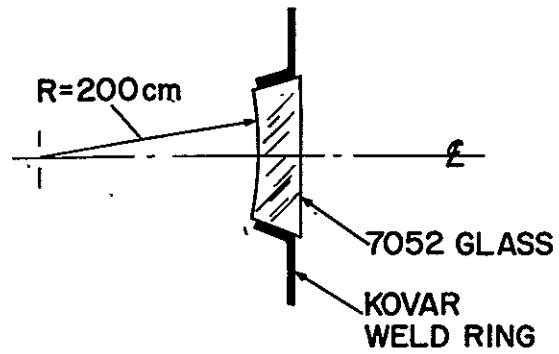

M 5921

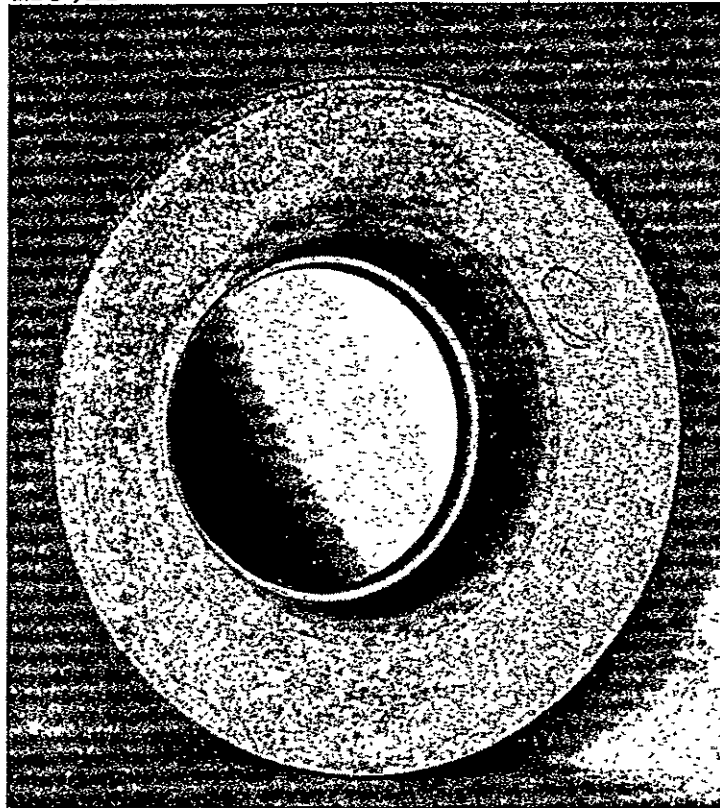


Fig. III-16. Cross section sketch and photograph of metal-to-metal mirror developed under present program.

M 5922

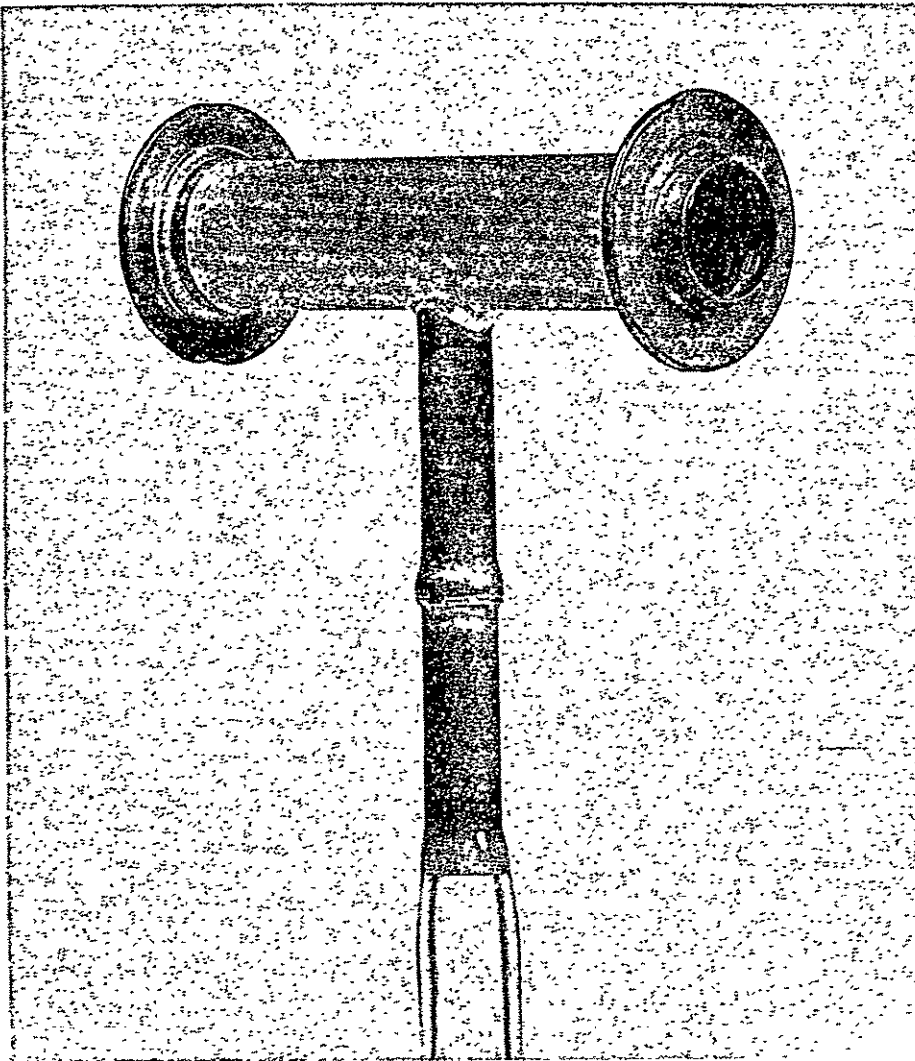


Fig. III-17. Fixture to test welding procedures and vacuum properties of metal-to-metal mirrors.

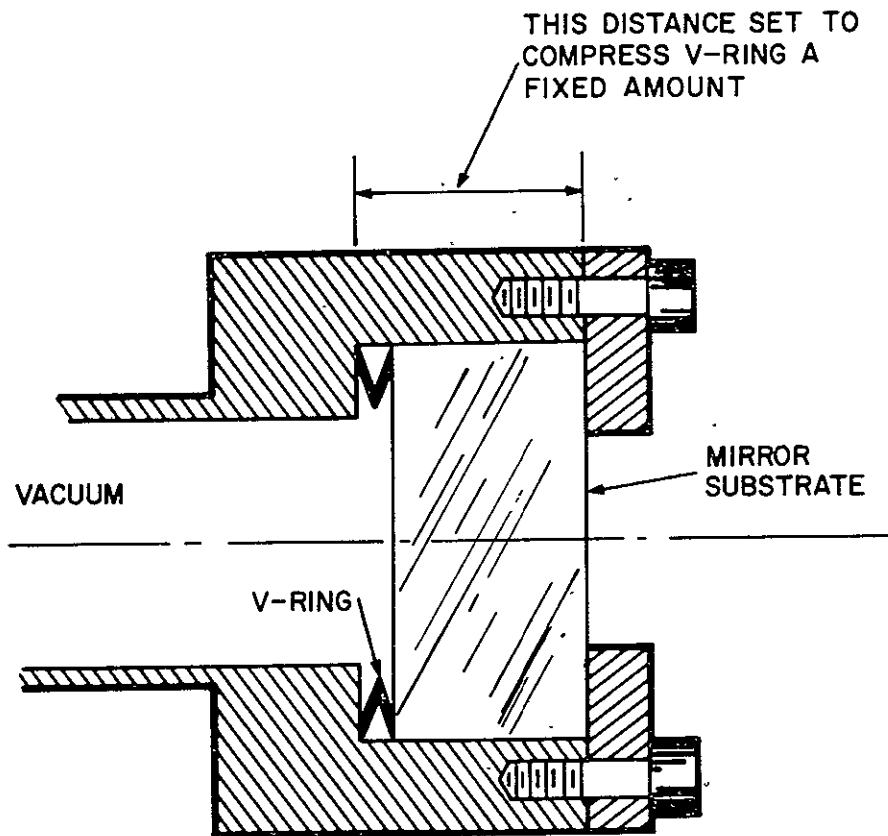


Fig. III-18. Cross sectional view of alternative mirror sealing technique using a compressed metal V-ring.

version, one complete dual power supply was built without the magamp regulators and telemetry circuits and incorporated into the demonstration unit described in the next section.)

Figure III-19 gives the current variation in a resistive load (not the laser) when the input line voltage is changed from 24 to 32 V. Figure III-20 gives the current variation experienced when the value of the resistive load is changed. The probable excursion of the laser impedance during changes in gas pressure during the useful life of the tube is indicated on the figure. Figure III-21 shows the variation of the current in a resistive load with temperature over the range  $-20^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  for both high and low line voltages. Figure III-22 shows the same data but with a 3083H laser tube as a load. Evidently the laser discharge characteristics change with temperature and yield better over-all regulation for the combination than for a simple resistive load.

## I. PROTOTYPE LASER UNIT

Although not required to build an operating laser by the contract work statement, we felt that the best method of uncovering new critical laser design areas was to build a prototype unit, including laser, cavity support, power supply, and exterior package in the configuration originally proposed. Such a unit was fabricated and demonstrated to NASA personnel in October 1967 (see Section III-E). The demonstration prompted several comments and suggestions. There was general agreement that it would be highly desirable to decrease the over-all length, if possible, from 21 in. to 16 in. We have determined that this is feasible, and our proposed design is now for a 16 in. over-all package length. The prototype did serve to confirm the practicality of our power supply and package design. The laser tube and cavity support were not intended to be exact prototypes because of time and economic limitations: a glass tube with external mirrors was used rather than a metal-ceramic version, and a simple tubular aluminum cavity support system was employed rather than the composite beryllium type proposed. Nevertheless, the prototype worked extremely well while being transported to the various NASA facilities, without mirror or other adjustments being required. Figure III-23 shows the exterior of the laser and Figure III-24 the interior. The over-all dimensions are given in Fig. III-25.

Building the prototype also allowed us to make an accurate weight projection. The measured weight budget for the prototype is given in Table III-4. Using magnesium and beryllium instead of aluminum would have reduced the prototype from 16.1 to 13.4 lb.

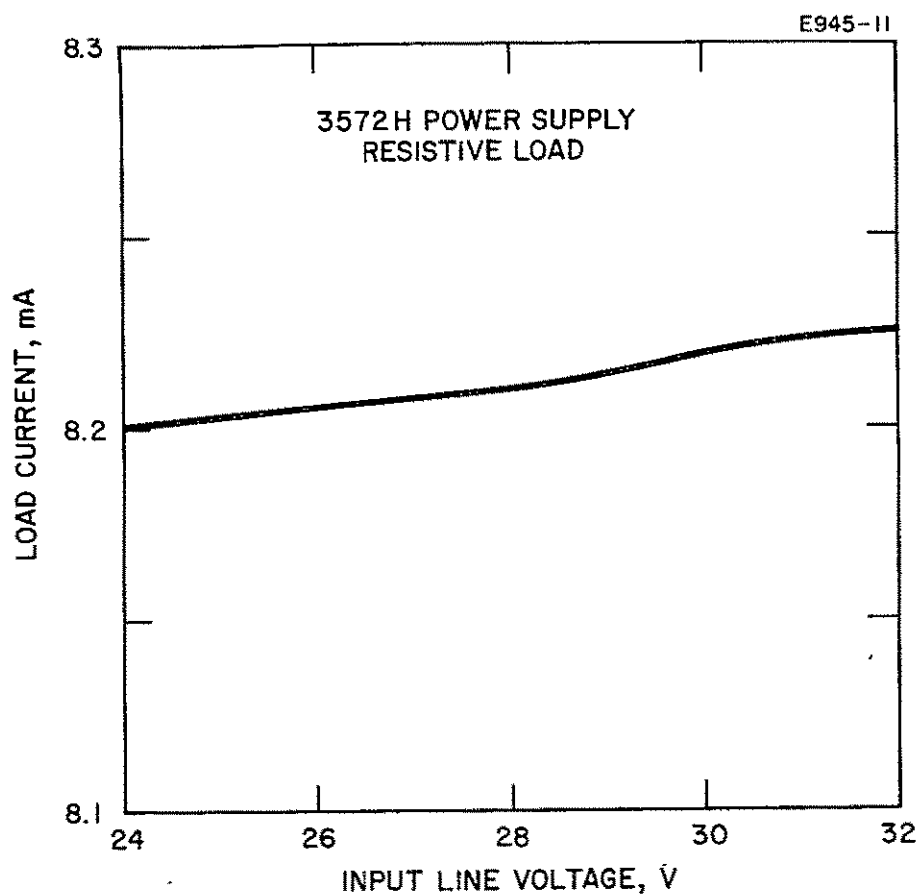


Fig. III-19. Load current variation for input line voltages in the range 24 to 32 V dc.

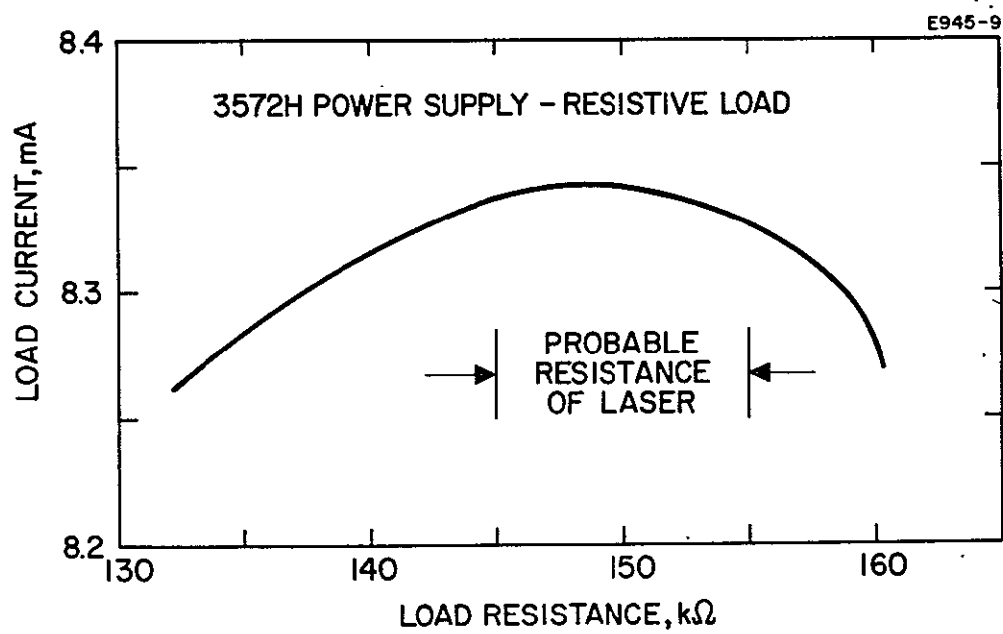


Fig. III-20. Load current variations for load resistances in the range 130  $k\Omega$  to 160  $k\Omega$ .

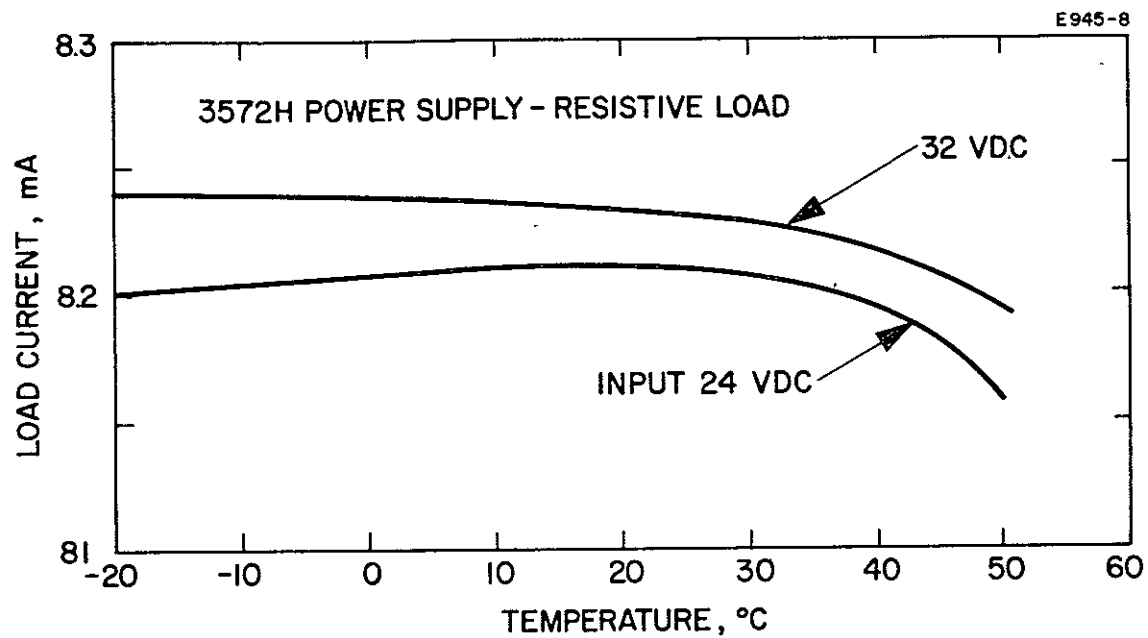


Fig. III-21. Load current variations for temperatures in the range -20 to +50°C with a resistive load.



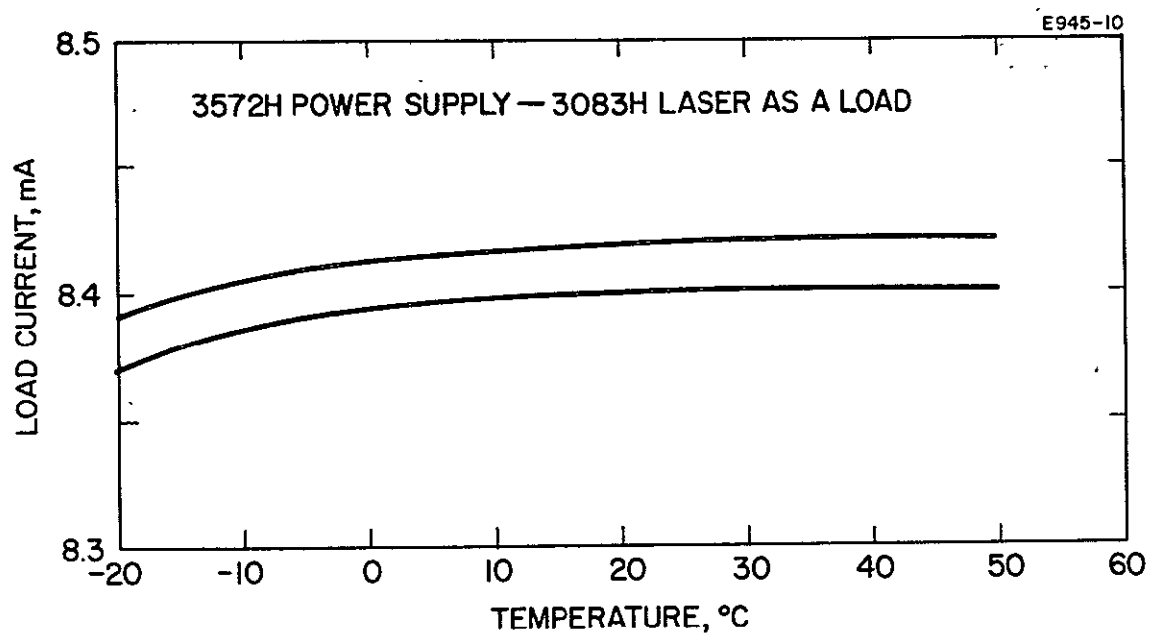


Fig. III-22. Load current variations for temperatures in the range - 20 to + 50°C with a 3083H laser as load.

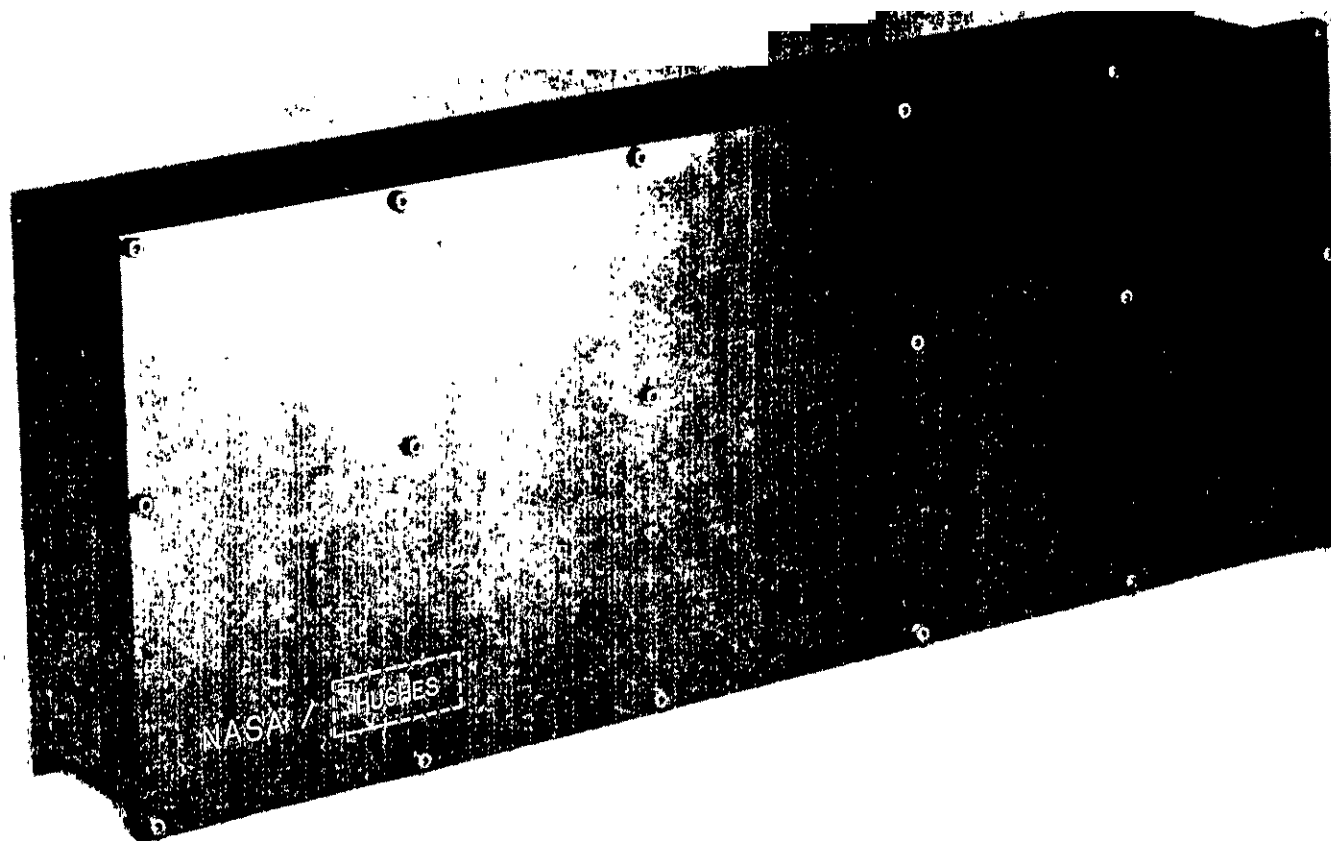


Fig. III-23. Photograph of prototype SQL demonstration unit.

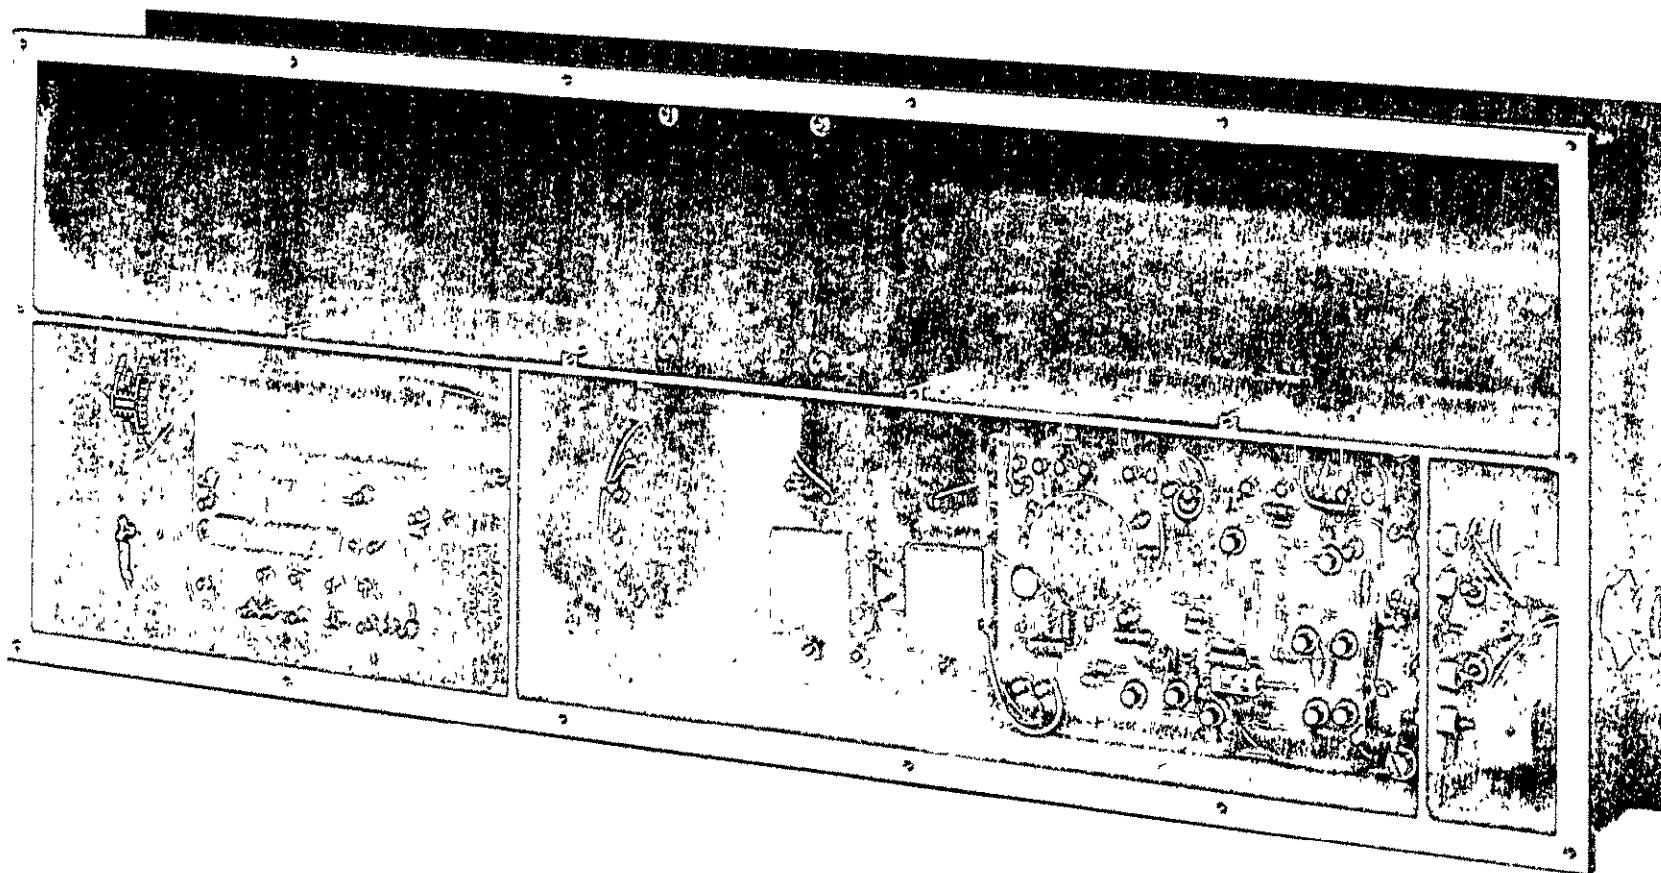


Fig. III-24. Photograph of prototype SQL interior showing laser mirror support structure and power supply circuit boards.

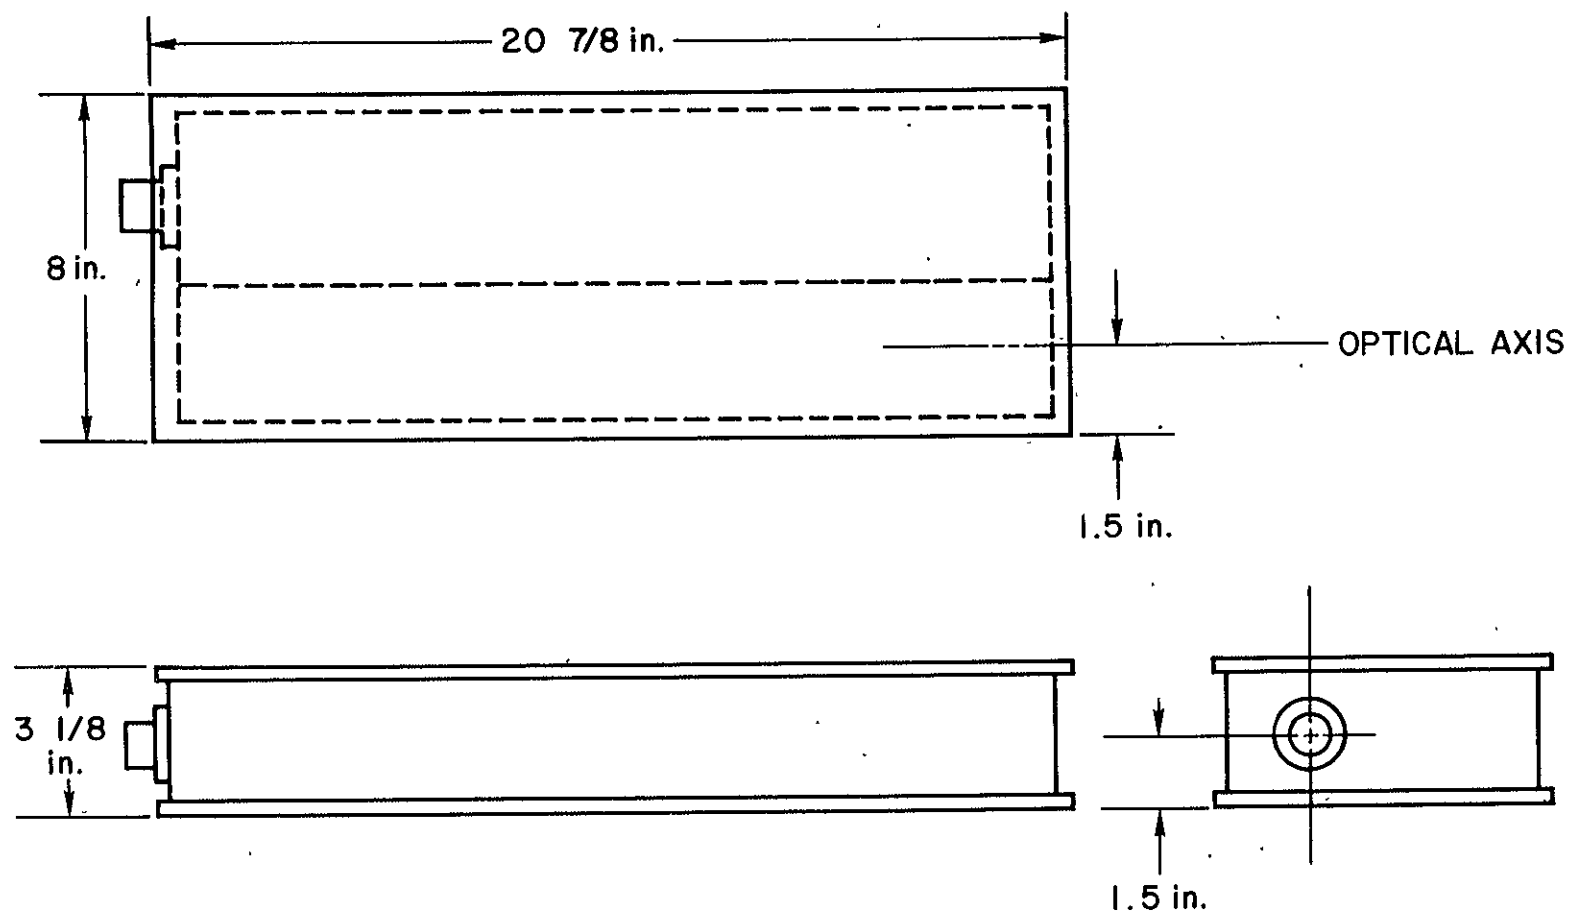


Fig. III-25. Dimensions of prototype unit. Proposed design has been reduced to 16 in. over-all length.

TABLE III-4  
Weight Budget

E945-24

| ITEM           | PROTOTYPE<br>(21 in.)<br>(ACTUAL) | PROTOTYPE<br>(21 in.)<br>(PROPOSED<br>MATERIALS) | PROPOSED<br>DESIGN<br>(16 in.) |
|----------------|-----------------------------------|--|--------------------------------|
| PACKAGE        | 5.9 lb (Al)                       | 3.8 lb (Mg)                                      | 2.9 lb (Mg)                    |
| POWER SUPPLY   | 4.7                               | 4.7  | 4.7                            |
| OPTICAL CAVITY | 4.0 (Al)                          | 2.8 (Be)   | 2.2 (Be)                       |
| TUBE           | 0.5 (GLASS)                       | 1.5 (M/C)  | 1.2 (M/C)                      |
| POTTING        | 1.0                               | 0.3  | 0.3                            |
| TELEMETRY      | —                                 | 0.3  | 0.3                            |
| <i>TOTAL</i>   | <i>16.1 lb</i>                    | <i>13.4 lb</i>                                   | <i>11.6 lb</i>                 |

Shortening the laser to the new proposed length should further reduce the weight to 11.6 lb. A slightly greater weight saving may be realized by further power supply optimization, especially in magnetics, since the magnetics for the present supply were very conservatively designed.

#### J. RELIABILITY PREDICTION AND STRESS ANALYSIS FOR 3072H LASER

The over-all reliability of the integrated laser and power supplies may be expressed as the product of the probability of mission success for each of its major subassemblies. In the Phase I design, the over-all laser unit has two discharge sections within a common metal-ceramic vacuum envelope. Each section has separate power supplies which provide the anode and starting voltages. Note that the cathode is at ground potential and operates in the "cold" mode. Thus, the probability that the integrated laser provides full power output of 5 mW (i. e., no failures) may be expressed as the probability that all subassemblies operate:

$$R_{\text{laser}} = R_{\text{PS}}^2 \times R_{\text{LDS}}^2 \times R_{\text{VEP}}$$

where

$R_{\text{laser}}$   $\equiv$  reliability of the integrated laser and its power supplies (probability everything works)

$R_{\text{PS}}$   $\equiv$  reliability of one power supply

$R_{\text{LDS}}$   $\equiv$  reliability of one discharge section

$R_{\text{VEP}}$   $\equiv$  reliability of the common laser tube vacuum-envelope and package.

The Phase I design effectively provides a redundant mode of operation which, upon failure of one power supply or discharge element, allows performance at approximately 35% of the power output. Thus, effective redundancy allows a mode of degraded performance (Mode 2). The probability of successful operation in this mode is expressed by the series-parallel mission success diagram of Fig. III-26. The mission success diagram demonstrates that the laser output will fail only when both power supply-laser tube combinations or the vacuum envelope fails. The fall-off of output power due to cathode wearout or contamination is a phenomenon which could be predicted if statistical data were available. Therefore, this is not considered a MTBF, but a lifetime

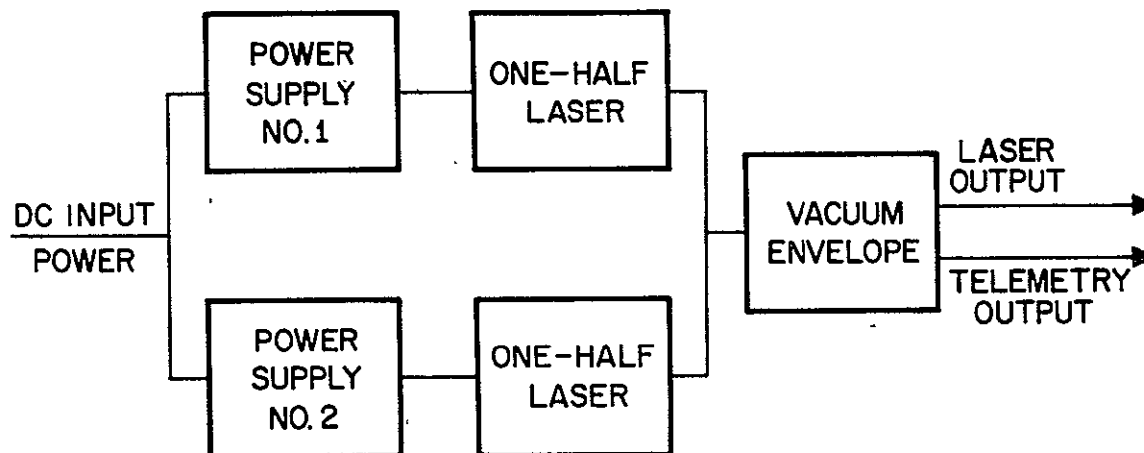


Fig. III-26. Reliability diagram, degraded mode 2 operation.

limiting factor. The probability that the integrated laser will operate in the degraded mode is  $R_{DL}$  expressed from the reliability block diagram as follows:

$$R_{DL} = \left[ 1 - (1 - R_{PS} R_{LDS})^2 \right] R_{VEP}$$

The predicted reliability of the 3072H laser unit is shown in Fig. III-27. This figure shows the reliability and mean-time-between-failures for no failure (full performance) and for the degraded mode of operation which provides 35% of the power output at the time of failure. In addition, curves are provided for the effect on reliability and MTBF of using Mil-Spec parts (proposed for Phase II) and the use of high reliability parts which may be directly substituted in any follow-on flight unit program. This analysis of reliability is based upon actual Hughes laser life test experience and failure rate data collected from electronic components.

Hughes/EDD has accrued over 15,000 hours of life test operation on the cold cathode 5 mW 3082H, He-Ne (cw) family of lasers. These data are summarized in Table III-5. These data are further supported by 18,000 hour lifetimes achieved by U. Hochuli, et al. (Ref. III-15). With these data and the rapidly changing state of the art, a conservative 25,000 hour mean-time-between-failures or greater is predicted for the 5 mW He-Ne laser. This prediction is only limited by the amount of data accrued to date. As a comparison, the initial predicted levels for the Hughes medium power TWT's were 20,000 hours mean-time-to-failure based upon limited life test data. Subsequent life tests have shown that these metal ceramic tubes exhibit an inherent mean-time-to-failure of greater than 1.5 million hours.

Many of the techniques used in these high reliability tubes are being used in perfecting the metal-ceramic Phase II He-Ne laser. For example, the Hughes metal-ceramic seal techniques used in these tubes are being used for the laser vacuum envelope. This type of vacuum seal has accrued over 1.5 million hours of failure free performance on such space programs as Surveyor, Syncom, ATS, Early Bird, Intelsat, Pioneer, and Lunar Orbiter.

The reliability prediction for each power supply is based upon an analysis using actual electrical stress levels for all components. Circuit design and derating levels have been selected to optimize efficiency, reliability, weight, etc. This analysis presents failure rates for a power supply which employs either Mil-Spec level or high reliability parts. It is proposed that the Mil-Spec electronic parts be incorporated into the lasers fabricated for Phase II achieving the



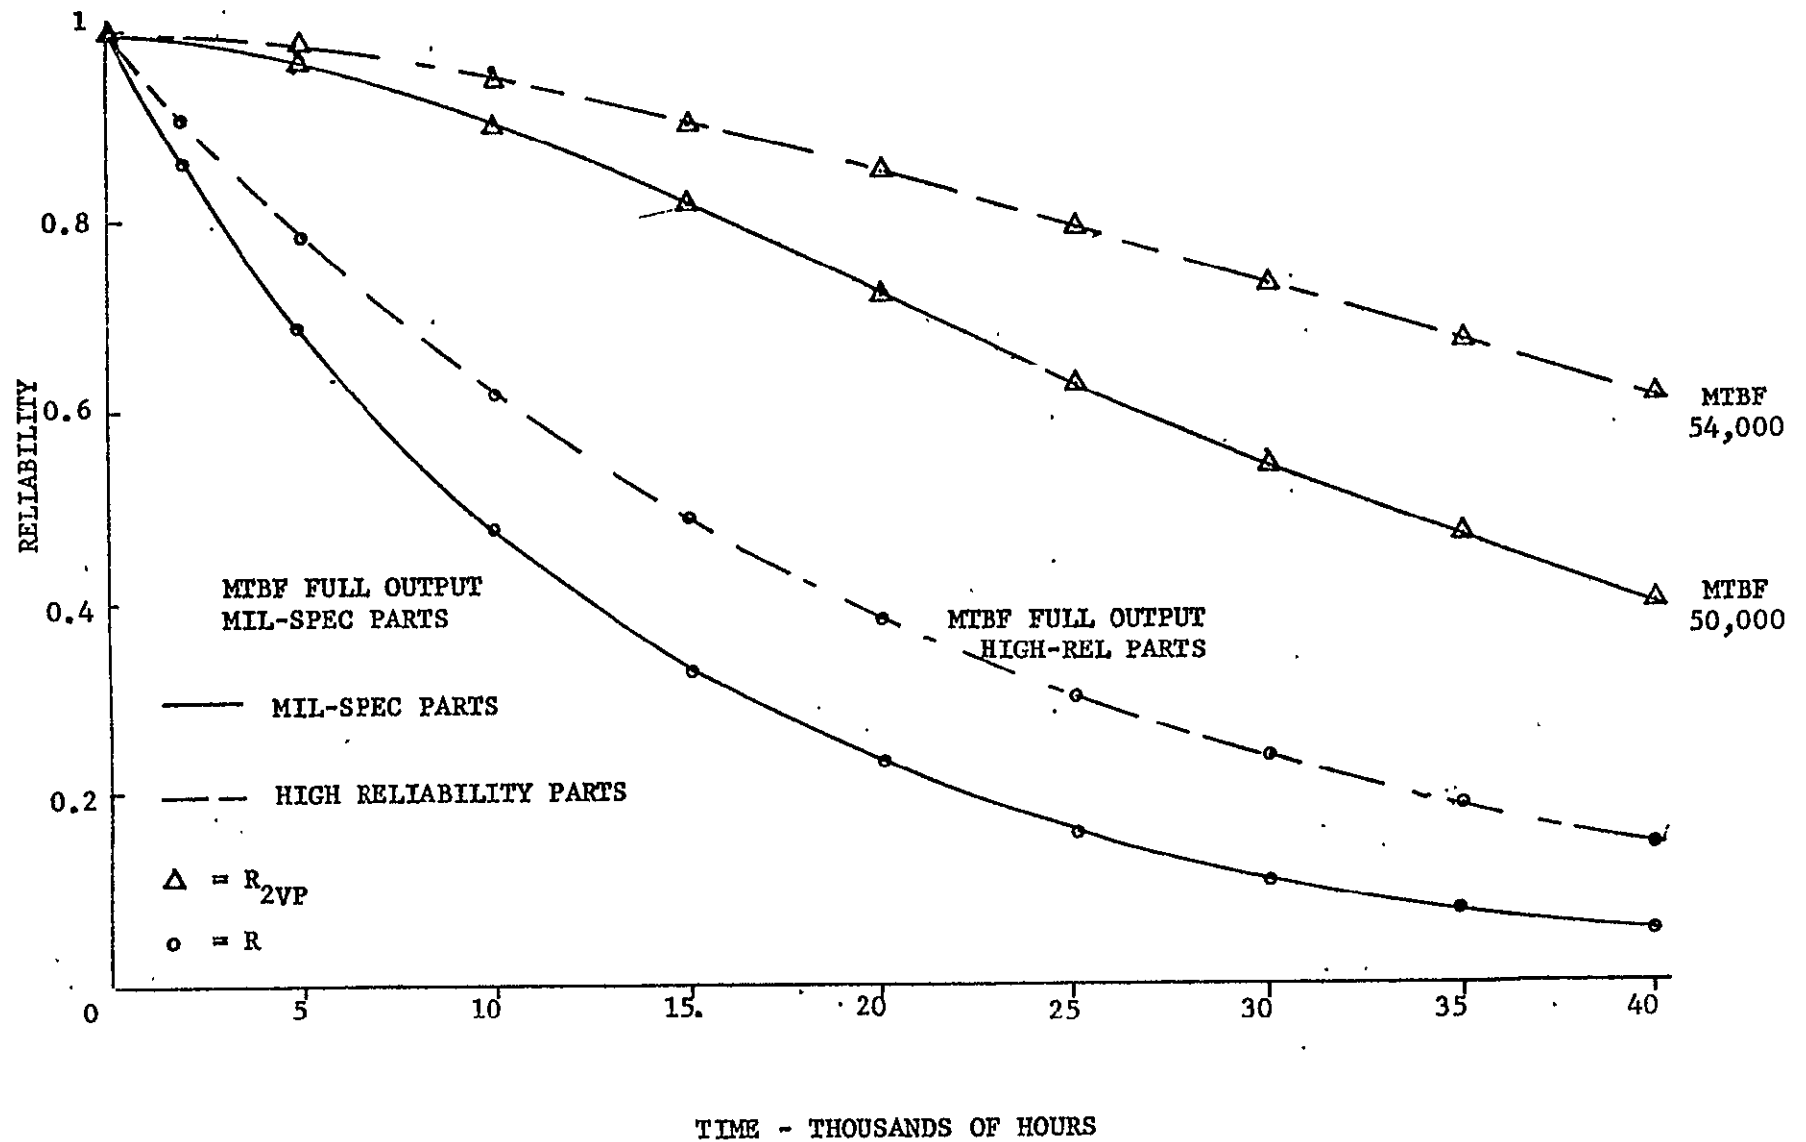


Fig. III-27. Reliability as a function of time for Mil Spec parts and High Reliability parts.

TABLE III-5

Power Supply Parts Count and Failure Rate Data  
(For One Power Supply)

| Part Type                                       | Number of Components | MIL-Spec.<br>$\lambda \times 10^{-6}$ | HI-Reliability<br>$\lambda \times 10^{-6}$ |
|---|----------------------|---------------------------------------|--|
| Transistors                                     | 15                   | 3.510                                 | 0.778                                      |
| Diodes  | 34                   | 8.550                                 | 1.596                                      |
| Capacitors                                      | 15                   | 2.404                                 | 0.890                                      |
| Resistors                                       | 41                   | 0.291                                 | 0.156                                      |
| Magnetics and<br>Feed-Through Caps              | 9                    | 1.800                                 | 0.180                                      |
| Total Failure Rate ( $\lambda \times 10^{-6}$ ) |                      | 16.555                                | 3.600                                      |

reliability level indicated by Fig. III-27. Additional part preconditioning and parameter screening may be employed for space flight hardware in order to achieve the high reliability part level.

The failure rates using Mil-Spec parts are selected from those given in MIL-HDBK-217A, "Reliability Stress and Failure Rate Data for Electronic Equipment." These high reliability part failure rates are conservatively based upon Hughes space programs part data and the document entitled, "Dormant Operating and Storage Effects on Electronic Equipment and Part Reliability," written under Rome Air Development Center's Technical Report Number TR-66348. It should be noted that there is a significant improvement in reliability by using high reliability components (see Fig. III-27). Hughes failure rate data have proven valid for Hughes space qualified parts. These failures on Hughes spacecraft have been predicted based upon these failure rates, with only two occurring to date.

The reliability of the telemetry circuits has not been included in this preliminary analysis. The telemetry portion of the laser and power supply is designed to be failsafe; i.e., failure of any telemetry point will not cause a catastrophic failure of the power supply or laser. Since the telemetry circuits are designed failsafe, they will not alter the over-all reliability of the integrated power supply and laser.

The detailed component part stress and derating analysis is presented in the following pages for one power supply. The second power supply operates under identical conditions and exhibits the same failure rate. This stress analysis is based upon calculated electrical and thermal stress levels experienced during equipment operation encompassing critical parameters for each part. The parts count is based upon the power supply design as defined by the schematic Diagram B190074 dated 15 January 1968. The analysis shows that the applied parts derating levels are consistent with space program requirements of a reliable design with maximum performance at a minimum dc input power level.

The component part stress and derating analysis is presented in tabulated form by generic part type. In general, the worst condition was used to calculate the electrical stress. The maximum saturation voltage, maximum leakage current, maximum applied voltage, and other such component part parameters were used to obtain the maximum stress levels. These values are compared with the rating of the component part at an estimated baseplate temperature of 50°C. The rated value for each component includes derating due to the temperature rise above this base plate temperature. The stress analysis sheets for one power supply follow.

## STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.<br><br>24.11.15 | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(mA) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |              |      | STRESS<br>RATIO | FAILURE<br>RATE<br>10 <sup>-6</sup> HRS | HR.  | MIL |
|-------------------|----------------|-----------------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|--------------|------|-----------------|---|------|-----|
|                   |                |                       | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |              | AMB. |                 |   |      |     |
|                   |                |                       |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | 2/°C<br>T.C. |      |                 |   |      |     |
| R1                | RS1-A          | 350                   |                         |       |                      |       | NIL                   | 1     |      | 275               | -55  | 25             | 36           | 75   | 0.00            | .003                                    | .003 |     |
| R2                | RS1-A          | 15.0                  |                         |       |                      |       | 0.006                 | 1     |      | 275               | -55  | 25             | 36           | 75   | 0.00            | .003                                    | .003 |     |
| R3                | RN60C--        | 71.5K                 |                         |       |                      |       | 0.005                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.04            | .004                                    | .004 |     |
| R4                | RS1-A          | 3.5K                  |                         |       |                      |       | 0.023                 | 0.125 |      | 275               | -55  | 25             | 36           | 75   | 0.22            | .007                                    | .008 |     |
| R5                | RN60C--        | 1.0K                  |                         |       |                      |       | 0.037                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.29            | .007                                    | .010 |     |
| R6                | RN60C--        | 5.11K                 |                         |       |                      |       | 0.006                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.05            | .004                                    | .004 |     |
| R7                | RN60C--        | 71.5K                 |                         |       |                      |       | 0.012                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.12            | .005                                    | .005 |     |
| R8                | RN60C--        | 10.0K                 |                         |       |                      |       | 0.080                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.64            | .010                                    | .030 |     |
| R9                | RN60C--        | 2.15K                 |                         |       |                      |       | 0.008                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.06            | .004                                    | .004 |     |
| R10               | RN60C--        | 5.11K                 |                         |       |                      |       | 0.014                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.11            | .005                                    | .005 |     |
| R11               | RN60C--        | 2.15K                 |                         |       |                      |       | 0.045                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.36            | .009                                    | .020 |     |
| R12               | RN60C--        | 5.11                  |                         |       |                      |       | 0.020                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.02            | .004                                    | .004 |     |
| R13               | RN60C--        | 10.0K                 |                         |       |                      |       | 0.036                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.29            | .007                                    | .010 |     |
| R14               | RN60C--        | 10.0K                 |                         |       |                      |       | 0.040                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.32            | .008                                    | .020 |     |
| R15               | RN60C--        | 10.0K                 |                         |       |                      |       | 0.040                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.32            | .008                                    | .020 |     |
| R16               | RN60C--        | 10.0K                 |                         |       |                      |       | 0.020                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.02            | .004                                    | .004 |     |
| R17               | RN60C--        | 12.4K                 |                         |       |                      |       | 0.004                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.04            | .004                                    | .004 |     |
| R18               | RN60C--        | 12.4K                 |                         |       |                      |       | 0.005                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.04            | .004                                    | .004 |     |
| R19               | RN60C--        | 6.81K                 |                         |       |                      |       | 0.020                 | 0.125 |      | 175               | -55  | 125            | 2.0          | 75   | 0.02            | .004                                    | .004 |     |
| R20               | RS-2C          | 400.0                 |                         |       |                      |       | 0.44                  | 1     |      | 275               | -55  | 25             | 36           | 75   | 0.20            | .004                                    | .008 |     |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.       | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |                | STRESS<br>RATIO | H.R.<br>FAILURE<br>RATE<br>10 <sup>-6</sup> HRS | MIL  |
|-------------------|----------------|-------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|----------------|-----------------|---|------|
|                   |                |             | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                | AMB. |                |                 |   |      |
|                   |                |             |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> |      | T <sub>C</sub> |                 |   |      |
| R21               | RN60C--        | 21.5K       |                         |       |                      |       | 0.02                  | 0.125 |      | 175               | -55  | 25             | 2.0  | 75             | 0.02            | .004  | .004 |
| R23               | RN60C--        | 221K        |                         |       |                      |       | 0.00                  | 0.125 |      | 175               | -55  | 25             | 2.0  | 75             | 0.00            | .003  | .004 |
| R24               | RS1-A          | 270         |                         |       |                      |       | 0.01                  | 1     |      | 275               | -55  | 25             | .36  | 75             | 0.01            | .003  | .004 |
| R25               | RS1-A          | 25.0        |                         |       |                      |       | 0.04                  | 1     |      | 275               | -55  | 25             | .36  | 75             | 0.05            | .003  | .005 |
| R26               | RN60C--        | 1.0K        |                         |       |                      |       | 0.00                  | 0.125 |      | 175               | -55  | 25             | 2.0  | 75             | 0.00            | .003  | .004 |
| R27               | RS-5           | 33.0K       |                         |       |                      |       | 0.10                  | 5     |      | 275               | -55  | 25             | .36  | 75             | 0.02            | .003  | .004 |
| R28               | RS-10          | 50.0K       |                         |       |                      |       | 5.0                   | 10.0  |      | 275               | -55  | 25             | .36  | 75             | 0.61            | .006  | .030 |
| R29               | RN60C--        | 5.11K       |                         |       |                      |       | 0.006                 | .125  |      | 175               | -55  | 25             | 2.6  | 75             | 0.05            | .004  | .004 |
| R30               | RS1-A          | 30.0        |                         |       |                      |       | 0.04                  | 1.0   |      | 275               | -55  | 25             | .36  | 75             | 0.04            | .004  | .004 |
| R31               | RS1-A          | 30.0        |                         |       |                      |       | 0.04                  | 1.0   |      | 275               | -55  | 25             | .36  | 75             | 0.04            | .004  | .004 |
| R32               | RN60C--        | 619         |                         |       |                      |       | 0.07                  | .125  |      | 175               | -55  | 25             | 2.0  | 75             | 0.60            | .010  | .030 |
| R33               | RN60C--        | 357<br>≈ 6K |                         |       |                      |       | 0.00                  | .250  |      | 175               | -55  | 25             | 2.0  | 75             | 0.00            | .003  | .003 |
| R34               | RN60C--        | 310         |                         |       |                      |       | .03                   | .125  |      | 175               | -55  | 25             | 2.0  | 75             | .020            | .007  | .008 |
| R40               | RN60C--        | 41.1K       |                         |       |                      |       | .010                  | .125  |      | 175               | -55  | 25             | 2.0  | 75             | 0.11            | .005  | .005 |
| R41               | RN60C--        | 8.25K       |                         |       |                      |       | .003                  | .125  |      | 175               | -55  | 25             | 2.0  | 75             | 0.04            | .004  | .004 |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

## STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.<br><br>uf | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R. MIL<br>FAILURE<br>RATE |  |
|-------------------|----------------|-----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|-----------------------------|--|
|                   |                |                 | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |      | AMB. |                 | 10 <sup>-6</sup> HRS        |  |
|                   |                |                 |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | T.C. |      |                 |                             |  |
| C1                | 137D--         | 78              | 32.0                    | 60    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .19             | .028 .150                   |  |
| C2                | 350D--         | .022            | 4.0                     | 60    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .08             | .024 .140                   |  |
| C3                | 35D--          | .022            | 32.0                    | 50    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .65             | .076 .250                   |  |
| C4                | 350D--         | 1.0             | 6.0                     | 50    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .13             | .026 .160                   |  |
| C5                | 96P--          | .0022           | 14.0                    | 100   |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .14             | .010 .05                    |  |
| C6                | 96P--          | .0022           | 40.0                    | 100   |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .40             | .015 .062                   |  |
| C7                | 96P--          | .0022           | 40.0                    | 100   |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .40             | .015 .062                   |  |
| C8                | 350D--         | 2.2             | 14.0                    | 50    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .07             | .024 .130                   |  |
| C9                | 135D--         | 94              | 20.3                    | 50    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .10             | .026 .060                   |  |
| C10               | 350D--         | 2.2             | 6                       | 50    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .13             | .026 .160                   |  |
| C11               | 350D--         | 0.22            | 25                      | 50    |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .50             | .050 .250                   |  |
| C12               | 96P--          | .33             | 275                     | 400   |                      |       |                       |       |      | 125               | -55  | 85             |      | 75   | .69             | .100 .590                   |  |
| C13               | 355M--         | .01             | 1400                    | 2500  |                      |       |                       |       |      | 125               | -40  | 85             |      | 75   | .56             | .050 .070                   |  |
| C14               | 355M--         | .01             | 1400                    | 2500  |                      |       |                       |       |      | 125               | -40  | 85             |      | 75   | .56             | .050 .070                   |  |
| C15               | 350D--         | 10              | 22                      | 50    |                      |       |                       |       |      | 125               | -40  | 85             |      | 75   | .45             | .070 .200                   |  |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.           | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |               |      | STRESS<br>RATIO | H.R. MIL                                |      |
|-------------------|----------------|-----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|---------------|------|-----------------|---|------|
|                   |                |                 | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |               | AMB. |                 | FAILURE<br>RATE<br>10 <sup>-6</sup> FRS |      |
|                   |                |                 |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | mw/°C<br>T.C. |      |                 |   |      |
| CR1               | PS760B         | I <sub>f</sub>  |                         |       | 1.3                  | 100   | 0.007                 | 5.0   |      | 175               | -65  | 25             | 2.0           | 75   | 0.00            | .007                                    | .200 |
|                   |                | V <sub>R</sub>  | 32                      | 50    |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
|                   |                | V <sub>f</sub>  |                         | 0.50  |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
| CR2               | PS760B         | I <sub>f</sub>  |                         |       | 7.01                 | 100   | 0.000                 | 5.0   |      | 175               | -65  | 25             | 2.0           | 75   | 0.00            | .007                                    | .200 |
|                   |                | V <sub>R</sub>  | 0.50                    | 50    |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
|                   |                | V <sub>f</sub>  |                         | .50   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
| CR3               | PS760B         | I <sub>f</sub>  |                         |       | 7.01                 | 100   | 0.000                 | 5.0   |      | 175               | -65  | 25             | 2.0           | 75   | 0.00            | .007                                    | .200 |
|                   |                | V <sub>R</sub>  | 0.50                    | 50    |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
|                   |                | V <sub>f</sub>  |                         | 0.50  |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
| CR4               | PS510B         | I <sub>f</sub>  |                         |       | 23.0                 | 100   | 0.018                 | 0.600 |      | 175               | -65  | 25             | 2.0           | 75   | 0.06            | .007                                    | .200 |
|                   |                | V <sub>R</sub>  | 0.50                    | 225   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
|                   |                | V <sub>f</sub>  |                         | .80   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
| CR5               | 1N4942         | I <sub>R</sub>  |                         |       | 7.001                | 100   | 0.000                 | 5.00  |      | 175               | -65  | 25             | 1             | 75   | 0.00            | .007                                    | .200 |
|                   |                | V <sub>R</sub>  |                         |       |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
| CR6               | 1N4371A        | I <sub>zm</sub> |                         |       | 7.0                  | 140   | 0.018                 | 0.400 |      | 175               | -65  | 25             | 3.2           | 75   | 0.08            | .032                                    | .350 |
|                   |                | V <sub>z</sub>  |                         | 2.7   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |
| CR7               | PS6313         | I <sub>zm</sub> |                         |       | 3.0                  | 68.3  | 0.026                 | 0.600 |      | 175               | -65  | 25             | -             | 75   | 0.09            | .032                                    | .350 |
|                   |                | V <sub>z</sub>  |                         |       |                      |       |                       |       |      |                   |      |                |               |      |                 |   |      |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

Sheet 11 of 21

## STRESS ANALYSIS SHEET

## PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.           | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |               |      | STRESS<br>RATIO | H.R                                     | MIL |
|-------------------|----------------|-----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|---------------|------|-----------------|---|-----|
|                   |                |                 |                         |       |                      |       |                       |       |      | RATED             |      |                |               | AMB. |                 | FAILURE<br>RATE<br>10 <sup>-6</sup> HRS |     |
|                   |                |                 | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | MAX.              | MIN. | T <sub>s</sub> | mw/°C<br>T.C. |      |                 |   |     |
| CR8               | 1N825          | I <sub>2m</sub> |                         |       | 1.38                 | 1.75  | 0.009                 | 0.400 |      | 175               | -55  | 50             | 3.2           | 75   | 0.00            | 0.026                                   | 350 |
|                   |                | V <sub>f</sub>  |                         |       | 6.18                 | 6.2   |                       |       |      |                   |      |                |               |      |                 |   |     |
| CR9               | PS510B         | I <sub>f</sub>  |                         |       | 70.01                | 400   | 0.000                 | 0.600 |      | 175               | -65  | 25             | 2.0           | 75   | 0.00            | 0.007                                   | 200 |
|                   |                | V <sub>R</sub>  | 20                      | 225   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
|                   |                | V <sub>f</sub>  |                         | .80   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
| CR10              | PS760B         | I <sub>f</sub>  |                         |       | 6.0                  | 100   | 0.024                 | 0.250 |      | 175               | -65  | 25             | 2.0           | 75   | 0.19            | 0.010                                   | 250 |
|                   |                | V <sub>R</sub>  | 30                      | 50    |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
|                   |                | V <sub>f</sub>  |                         | 0.50  |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
| CR11              | PS760B         | I <sub>f</sub>  |                         |       | 6.0                  | 100   | 0.024                 | 0.250 |      | 175               | -65  | 25             | 2.0           | 75   | 0.19            | 0.010                                   | 250 |
|                   |                | V <sub>R</sub>  | 30                      | 50    |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
|                   |                | V <sub>f</sub>  |                         | 0.50  |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
| CR12              | PS510B         | I <sub>f</sub>  |                         |       | 70.01                | 400   | 0.000                 | 0.600 |      | 175               | -65  | 25             | 2.0           | 75   | 0.00            | 0.007                                   | 200 |
|                   |                | V <sub>R</sub>  | 65                      | 225   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
|                   |                | V <sub>f</sub>  |                         | 0.80  |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
| CR13              | PS510B         | I <sub>f</sub>  |                         |       | 70.01                | 400   | 0.000                 | 0.600 |      | 175               | -65  | 25             | 2.0           | 75   | 0.00            | 0.007                                   | 200 |
|                   |                | V <sub>R</sub>  |                         | 225   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |
|                   |                | V <sub>f</sub>  |                         | .80   |                      |       |                       |       |      |                   |      |                |               |      |                 |   |     |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope



# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.          | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(mA) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R. | MIL  |
|-------------------|----------------|----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|------|------|
|                   |                |                | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |      |      |                 |      |      |
|                   |                |                |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | T.C. | AMB. |                 |      |      |
| CR14              | PS510B         | I <sub>F</sub> |                         |       | 20.0                 | 400   | 0.024                 | 0.600 |      | 175               | -65  | 25             |      | 75   | .08             | .008 | .250 |
|                   |                | V <sub>R</sub> | 5.0                     | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
|                   |                | V <sub>F</sub> | 1.2                     |       |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
| CR15              | PS510B         | I <sub>F</sub> |                         |       | 20.0                 | 400   | 0.024                 | 0.600 |      | 175               | -65  | 25             |      | 75   | .08             | .008 | .250 |
|                   |                | V <sub>R</sub> | 5.0                     | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
|                   |                | V <sub>F</sub> | 1.2                     |       |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
| CR16              | 1N4249         | I <sub>F</sub> |                         |       | 1.0                  | 1000  | 7.001                 | 1.2   |      | 175               | -65  | 25             |      | 75   | .00             | .001 | .200 |
|                   |                | V <sub>R</sub> | 275                     | 1000  |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
|                   |                | V <sub>F</sub> |                         | 1.2   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
| CR17              | 1N4249         | I <sub>F</sub> |                         |       | 1.0                  | 1000  | 7.001                 | 1.2   |      | 175               | -65  | 25             |      | 75   | .00             | .007 | .200 |
|                   |                | V <sub>R</sub> | 275                     | 1000  |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
|                   |                | V <sub>F</sub> |                         | 1.2   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
| CR18              | 1N4249         | I <sub>F</sub> |                         |       | 1.0                  | 1000  | 7.001                 | 1.2   |      | 175               | -65  | 25             |      | 75   | .00             | .007 | .200 |
|                   |                | V <sub>R</sub> | 275                     | 1000  |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
|                   |                | V <sub>F</sub> |                         | 1.2   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
| CR19              | 1N4249         | I <sub>F</sub> |                         |       | 1.0                  | 1000  | 7.001                 | 1.2   |      | 175               | -65  | 25             |      | 75   | .00             | .007 | .200 |
|                   |                | V <sub>R</sub> | 275                     | 1000  |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
|                   |                | V <sub>F</sub> |                         | 1.2   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |
| CR20              | PS510B         | I <sub>F</sub> |                         |       | 7.001                | 400   | 7.001                 | 0.600 |      | 175               | -65  | 25             |      | 75   | .00             | .007 | .200 |
|                   |                | V <sub>R</sub> | 5                       | 2.25  |                      |       |                       |       |      |                   |      |                |      |      |                 |      |      |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

## PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.          | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R. | MIL |
|-------------------|----------------|----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|------|-----|
|                   |                |                | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |      | AMB. |                 |      |     |
|                   |                |                |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | T.C. |      |                 |      |     |
| CR27              | SCH25000       | I <sub>f</sub> |                         |       | 10                   | 500   | .05                   | 15    |      | 100               | -65  | 25             |      | 75   | .00             | 650  | 750 |
|                   |                | V <sub>R</sub> | 15000                   | 25000 |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
|                   |                | V <sub>f</sub> |                         | 33    |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
| CR28              | SCH2500        | I <sub>f</sub> |                         |       | 10                   | 500   | .05                   | 15    |      | 100               | -65  | 25             |      | 75   | .00             | 45   | 75  |
|                   |                | V <sub>R</sub> | 15000                   | 25000 |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
|                   |                | V <sub>f</sub> |                         | 33    |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
| CR29              | PS510B         | I <sub>f</sub> |                         |       | 4.2                  |       | .003                  | 0.6   |      | 175               | -65  | 25             | 2.0  | 75   | .00             | 007  | 200 |
|                   |                | V <sub>R</sub> | 3                       | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
|                   |                | V <sub>f</sub> |                         | .8    |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
| CR31              | PS510B         | I <sub>f</sub> |                         |       | 4.2                  | 400   | .003                  | 0.6   |      | 175               | -65  | 25             | 2.0  | 75   | .00             | 007  | 200 |
|                   |                | V <sub>R</sub> | 25                      | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
|                   |                | V <sub>f</sub> |                         | .8    |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
| CR32              | PS510B         | I <sub>f</sub> |                         |       | 4.2                  | 400   | .003                  | 0.6   |      | 175               | -65  | 25             | 2.0  | 75   | .00             | 007  | 200 |
|                   |                | V <sub>R</sub> | 25                      | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
|                   |                | V <sub>f</sub> |                         | 0.8   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
| CR33              | PS510B         | I <sub>f</sub> |                         |       | 4.2                  | 400   | .003                  | 0.6   |      | 175               | -65  | 25             | 2.0  | 75   | .00             | 007  | 200 |
|                   |                | V <sub>R</sub> | 25                      | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |
|                   |                | V <sub>f</sub> |                         | 0.8   |                      |       |                       |       |      |                   |      |                |      |      |                 |      |     |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

## PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.          | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R.                                    | MIL  |
|-------------------|----------------|----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|---|------|
|                   |                |                | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |      | AMT. |                 | FAILURE<br>RATE<br>10 <sup>-6</sup> HRS |      |
|                   |                |                |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | T.C. |      |                 |   |      |
| CR21              | PSS10B         | I <sub>f</sub> |                         |       | 5                    | 400   | .006                  | 600   |      | 175               | -65  | 25             |      | 75   | .01             | .007                                    | .200 |
|                   |                | V <sub>R</sub> | 25                      | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
|                   |                | V <sub>f</sub> |                         | 0.80  |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
| CR22              | PSS10B         | I <sub>f</sub> |                         |       | 5                    | 400   |                       |       |      | 175               | -65  | 25             |      | 75   | .01             | .007                                    | .200 |
|                   |                | V <sub>R</sub> | 25                      | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
|                   |                | V <sub>f</sub> |                         | 0.80  |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
| CR23              | 1N3667         | I <sub>f</sub> |                         |       | 2.5                  | 250   | .125                  | 1.0   |      | 175               | -65  | 25             |      | 75   | .125            | .009                                    | .250 |
|                   |                | V <sub>R</sub> | 1400                    | 2500  |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
|                   |                | V <sub>f</sub> |                         | 5.0   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
| CR24              | 1N3667         | I <sub>f</sub> |                         |       | 2.5                  | 250   | .125                  | 1.0   |      | 175               | -65  | 25             |      | 75   | .125            | .009                                    | .250 |
|                   |                | V <sub>R</sub> | 1400                    | 2500  |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
|                   |                | V <sub>f</sub> |                         | 5.0   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
| CR25              | 1N3667         | I <sub>f</sub> |                         |       | 2.5                  | 250   | .125                  | 1.0   |      | 175               | -65  | 25             |      | 75   | .125            | .009                                    | .250 |
|                   |                | V <sub>R</sub> | 1400                    | 2500  |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
|                   |                | V <sub>f</sub> |                         | 5.0   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
| CR26              | 1N3667         | I <sub>f</sub> |                         |       | 2.5                  | 250   | .125                  | 1.0   |      | 175               | -65  | 25             |      | 75   | .125            | .009                                    | .250 |
|                   |                | V <sub>R</sub> | 1400                    | 2500  |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |
|                   |                | V <sub>f</sub> |                         | 5.0   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |      |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.          | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | FAILURE<br>RATE<br>10 <sup>-6</sup> HRS |     |
|-------------------|----------------|----------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|---|-----|
|                   |                |                | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |      | AMB. |                 |   |     |
|                   |                |                |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | T.C. |      |                 |   |     |
| CR34.             | P5510B         | I <sub>f</sub> |                         |       | 4.2                  | 400   | 0.003                 | 0.600 |      | 175               | -65  | 25             | 2.0  | 75   | 0.00            | 007                                     | 200 |
|                   |                | V <sub>R</sub> | 25                      | 225   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |     |
|                   |                | V <sub>f</sub> |                         | .8    |                      |       |                       |       |      |                   |      |                |      |      |                 |   |     |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.                | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |               |      | STRESS<br>RATIO | FAILURE<br>RATE  |      |
|-------------------|----------------|----------------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|---------------|------|-----------------|------------------|------|
|                   |                |                      | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |               | AMB. |                 | 10 <sup>-6</sup> | GRS  |
|                   |                |                      |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | mW/°C<br>T.C. |      |                 |                  |      |
| Q1                | HST5503        | I <sub>c</sub>       |                         |       | 210                  | 2000  | 0.075                 | 4.0   |      | 200               | -55  | 100            | 40            | 75   | 0.02            | .140             | .390 |
|                   |                | V <sub>CE(sat)</sub> |                         | .35   |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>CE</sub>      | 12                      | 80    |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>EB</sub>      |                         | 8     |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
| Q2:               | 2N2906A        | I <sub>c</sub>       |                         |       | 21                   | 600   | 0.010                 | 400   |      | 200               | -65  | 25             | 2.3           | 75   | 0.03            | .014             | .140 |
|                   |                | V <sub>CE(sat)</sub> |                         | 40    |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>CE</sub>      | -32                     | -60   |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>EB</sub>      |                         | 5     |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
| Q3                | 2N2222         | I <sub>c</sub>       |                         |       | 2.57                 | 500   | <.001                 | 1.8   |      | 175               | -65  | 25             | 12            | 75   | .00             | .013             | .100 |
|                   |                | V <sub>CE(sat)</sub> |                         | .30   |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>CE</sub>      | 18                      | 30    |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>EB</sub>      |                         | 5.0   |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
| Q4                | 2N2222         | I <sub>c</sub>       |                         |       | 0.32                 | 500   | <.001                 | 1.8   |      | 175               | -65  | 25             | 12            | 75   | .00             | .013             | .100 |
|                   |                | V <sub>CE(sat)</sub> |                         | .30   |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>CE</sub>      | 20                      | 30    |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |
|                   |                | V <sub>EB</sub>      |                         | 5     |                      |       |                       |       |      |                   |      |                |               |      |                 |                  |      |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT SYMBOL | PART NUMBER | PARA.                | MAX. VOLTAGE (VOLTS) |       | MAX. CURRENT (ma) |       | MAX. POWER (WATTS) |       |      | TEMPERATURE IN °C |      |                |            |      | STRESS RATIO | H.R. MIL.                         |      |
|----------------|-------------|----------------------|----------------------|-------|-------------------|-------|--------------------|-------|------|-------------------|------|----------------|------------|------|--------------|-----------------------------------|------|
|                |             |                      | ACTUAL               | RATED | ACTUAL            | RATED | ACTUAL             | RATED | DUTY | RATED             |      |                |            | AMB. |              | FAILURE RATE 10 <sup>-6</sup> TRS |      |
|                |             |                      |                      |       |                   |       |                    |       |      | MAX.              | MIN. | T <sub>s</sub> | MW/°C T.C. |      |              |                                   |      |
| Q5             | 2N2222      | I <sub>C</sub>       |                      |       | 6.05              | 500   | <.001              | 1.80  |      | 175               | -65  | 25             | 12         | 75   | 0.00         | .013                              | .100 |
|                |             | V <sub>CE(SAT)</sub> |                      | .30   |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>CEO</sub>     | 9.                   | 0     |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>EB</sub>      | 1.2                  | 5     |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
| Q6             | 2N2222      | I <sub>C</sub>       |                      |       | 0.40              | 500   | <.001              | 1.80  |      | 175               | -65  | 25             | 12         |      | 0.00         | .013                              | .100 |
|                |             | V <sub>CE(SAT)</sub> |                      | .30   |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>CEO</sub>     | 9.0                  | 30    |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>EB</sub>      | 1.2                  | 5     |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
| Q7             | 2N2222      | I <sub>C</sub>       |                      |       | 0.55              | 500   | .005               | 1.80  |      | 175               | -65  | 25             | 12         | 75   | 0.00         | .013                              | .100 |
|                |             | V <sub>CE(SAT)</sub> |                      | .30   |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>CEO</sub>     | 7.7                  | 30    |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>EB</sub>      | .5                   | 5     |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
| Q8             | 2N2222      | I <sub>C</sub>       |                      |       | 0.55              | 500   | .010               | 1.80  |      | 175               | -65  | 25             | 12         | 75   | 0.00         | .013                              | .100 |
|                |             | V <sub>CE(SAT)</sub> |                      | .30   |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>CEO</sub>     | 14.5                 | 30    |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>EB</sub>      | .50                  | 5     |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
| Q9             | 2N2222      | I <sub>C</sub>       |                      |       | 40                | 500   | .012               | 1.8   |      | 175               | -65  | 25             | 12         | 75   | 0.00         | .013                              | .100 |
|                |             | V <sub>CE(SAT)</sub> |                      | .30   |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>CEO</sub>     | .6                   | .30   |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |
|                |             | V <sub>EB</sub>      | 1.2                  | 5     |                   |       |                    |       |      |                   |      |                |            |      |              |                                   |      |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.                | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R.<br>FAILURE<br>RATE<br>10 <sup>-6</sup> | MIL<br>RES |
|-------------------|----------------|----------------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|---|------------|
|                   |                |                      | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | RATED             |      |                |      | AMB. |                 |   |            |
|                   |                |                      |                         |       |                      |       |                       |       |      | MAX.              | MIN. | T <sub>s</sub> | T.C. |      |                 |   |            |
| Q10               | 2N2222         | I <sub>c</sub>       |                         |       | 40                   | 500   | .012                  | 1.80  |      | 175               | -65  | 25             | 12   | 75   | .00             | .013  | 100        |
|                   |                | V <sub>CE(SAT)</sub> |                         | .30   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>CE0</sub>     | 6                       | 30    |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>EB</sub>      | 1.2                     | 5     |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
| Q11               | HST5503        | I <sub>c</sub>       |                         |       | 420                  | 2000  | 0.15                  | 4.0   |      | 200               | -55  | 100            | 40   | 75   | .04             | .140  | 440        |
|                   |                | V <sub>CE(SAT)</sub> |                         | .35   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>CE0</sub>     | 20                      | 80    |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>EB</sub>      |                         | 8     |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
| Q12               | HST5503        | I <sub>c</sub>       |                         |       | 420                  | 200   | 0.15                  | 4.0   |      | 200               | -55  | 100            | 40   | 75   | .04             | .140  | 440        |
|                   |                | V <sub>CE(SAT)</sub> |                         | .35   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>CE0</sub>     | 20                      | 80    |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>EB</sub>      |                         | 8     |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
| Q13               | 2N4913         | I <sub>p</sub>       |                         |       |                      | .012  |                       | .450  |      | 175               | -55  | 25             | 4.0  | 75   | .00             | .050  | .430       |
|                   |                | V <sub>p</sub>       |                         | 25    |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
| Q15               | 2N2329         | I <sub>p</sub>       |                         |       |                      | .160  |                       |       |      | 125               | -55  | 85%            |      |      |                 | .050  | .430       |
|                   |                | I <sub>H</sub>       |                         |       |                      | .3.0  |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>GF</sub>      |                         | 1.0   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>B00</sub>     |                         | 400   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |
|                   |                | V <sub>F</sub>       |                         | 1.5   |                      |       |                       |       |      |                   |      |                |      |      |                 |   |            |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope

# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA.                | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(mA) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R. MIL         |     |
|-------------------|----------------|----------------------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|------------------|-----|
|                   |                |                      |                         |       |                      |       |                       |       |      | RATED             |      |                |      | AMB. |                 | FAILURE<br>RATE  |     |
|                   |                |                      | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | MAX.              | MIN. | T <sub>s</sub> | T.C. |      |                 | 10 <sup>-6</sup> | HRS |
| Q14               | HST5503        | I <sub>C</sub>       |                         |       | 210                  | 2100  | 0.075                 | 4.0   |      | 200               | -55  | 100            | 40   | 75   | 0.04            | 140              | 440 |
|                   |                | V <sub>CE(SAT)</sub> |                         | .35   |                      |       |                       |       |      |                   |      |                |      |      |                 |                  |     |
|                   |                | V <sub>CEO</sub>     | 12                      | 80    |                      |       |                       |       |      |                   |      |                |      |      |                 |                  |     |
|                   |                | V <sub>EB</sub>      |                         | 8     |                      |       |                       |       |      |                   |      |                |      |      |                 |                  |     |

T<sub>s</sub> = Temperature at which derating begins

T.C. = Derating slope



# STRESS ANALYSIS SHEET

PRELIMINARY

| CIRCUIT<br>SYMBOL | PART<br>NUMBER | PARA. | MAX. VOLTAGE<br>(VOLTS) |       | MAX. CURRENT<br>(ma) |       | MAX. POWER<br>(WATTS) |       |      | TEMPERATURE IN °C |      |                |      |      | STRESS<br>RATIO | H.R. / MIL                              |      |
|-------------------|----------------|-------|-------------------------|-------|----------------------|-------|-----------------------|-------|------|-------------------|------|----------------|------|------|-----------------|---|------|
|                   |                |       |                         |       |                      |       |                       |       |      | RATED             |      |                |      |      |                 | FAILURE<br>RATE<br>10 <sup>-6</sup> EES |      |
|                   |                |       | ACTUAL                  | RATED | ACTUAL               | RATED | ACTUAL                | RATED | DUTY | MAX.              | MIN. | T <sub>s</sub> | T.C. | AMB. |                 |   |      |
| T1                | F.S.           |       |                         |       | 1                    |       |                       |       |      |                   |      |                |      |      | -               | .020                                    | .200 |
| T2                | F.S.           |       |                         |       | 420                  |       |                       |       |      |                   |      |                |      |      | -               | .020                                    | .200 |
| T3                | F.S.           |       |                         |       | 2                    |       |                       |       |      |                   |      |                |      |      | -               | .020                                    | .200 |
| L1                |                | 100mh |                         |       | 420                  |       |                       |       |      |                   |      |                |      |      | -               | .020                                    | .200 |
| L2                |                | 500mh |                         |       | 10                   |       |                       |       |      |                   |      |                |      |      | -               | .020                                    | .200 |
| L3                |                | 2.4mh |                         |       | 420                  |       |                       |       |      |                   |      |                |      |      | -               | .020                                    | .200 |
| FT                | SMFB-A2        |       |                         |       |                      |       |                       |       |      |                   |      |                |      |      |                 | .020                                    | .200 |
| FT                | SMFB-A2        |       |                         |       |                      |       |                       |       |      |                   |      |                |      |      |                 | .020                                    | .200 |
| SR-1              | F.S.           |       |                         |       |                      |       |                       |       |      |                   |      |                |      |      |                 | .020                                    | .200 |

T<sub>s</sub> = Temperature at which derating begins .

T.C. = Derating slope

# REFERENCES

- II-1. U. Hochuli and P. Haldemann, "Cold cathodes for possible use in 6328 $\text{\AA}$  single mode He-Ne gas lasers," Rev. Sci. Instr. 36, 1493 (1965).
- III-1. E. I. Gordon and A.D. White, "Similarity laws for the effects of pressure and discharge diameter on the gain of He-Ne lasers," Appl. Phys. Letters 3, 199 (1963).
- III-2. A.D. White, "Increased power output of the 6328 $\text{\AA}$  gas maser," Proc. IEEE 51, 1669 (1963).
- III-3. E.F. Labuda and E.I. Gordon, "Microwave determination of average electron energy and density in He-Ne discharges," J. Appl. Phys. 35, 1647 (1964).
- III-4. J.Y. Wada and H. Heil, "Electron energy spectra in neon, xenon, and helium-neon laser discharges," IEEE J. Quantum Electron. QE-1, 327 (1965).
- III-5. W.W. Rigrod, "Gain saturation and output power of optical masers," J. Appl. Phys. 34, 2602 (1963).
- III-6. A.D. White, E.I. Gordon, and J.D. Rigden, "Output power of the 6328 $\text{\AA}$  gas maser," Appl. Phys. Letters 2, 91 (1963).
- III-7. P.W. Smith, "The output power of a 6328 $\text{\AA}$  He-Ne gas laser," IEEE J. Quantum Electron. QE-2, 62 (1966).
- III-8. P.W. Smith, "On the optimum geometry of a 6328 $\text{\AA}$  laser oscillator," IEEE J. Quantum Electron. QE-2, 77 (1966).
- III-9. P.W. Smith, "Linewidth and saturation parameters for the 6328 $\text{\AA}$  transition in a He-Ne laser," J. Appl. Phys. 37, 2089 (1966).
- III-10. A.D. White and E.I. Gordon, "Excitation mechanisms and current dependence of population inversion in He-Ne lasers," Appl. Phys. Letters 3, 197 (1963).
- III-11. J. Haisma "Construction and properties of short stable gas lasers," Phillips Research Reports Supplement No. 1, (1967).

- III-12. L. Allen and D. G. C. Jones "The He-Ne laser," *Advan. Phys.* 14, 479 (1965).
- III-13. U. Hochuli and P. Haldemann, "Cold cathodes for possible use in 6328 Å single mode He-Ne gas lasers," *Rev. Sci. Instr.* 36, 1493 (1965).
- III-14. R. Turner, K. M. Baird, M. J. Taylor, and C. J. Van der Hoeven, "Lifetime of He-Ne lasers," *Rev. Sci. Instr.* 35, 996 (1964).
- III-15. U. Hochuli, P. Haldemann, and D. Hardwich, "Cold cathodes for He-Ne gas lasers," presented at 1967 IEEE conference on Laser Engineering and Applications, Washington, D. C., June 1967.

| REVISIONS |     |             | APPROVED |     |     |     |
|-----------|-----|-------------|----------|-----|-----|-----|
| DATE      | LTR | DESCRIPTION | QC       | R&D | MFG | REL |
|           |     |             |          |     |     |     |

# APPENDIX A

|               |  |   |               |                    |
|---------------|--|---|---------------|--------------------|
| END USE       | NASA/ERC   | <div>HUGHES</div> <div>ELECTRON DYNAMICS DIVISION</div> |               |                    |
| PREP BY       | GEORGE CROWDER   | <div>HUGHES AIRCRAFT COMPANY</div>                      |               |                    |
| QC            | QUALIFICATION-RELIABILITY TEST PLAN<br>3072H SPACE QUALIFIED LASER |   |               |                    |
| R&D           |  |   |               |                    |
| MFG           |  |   |               |                    |
| REL           | <i>[Signature]</i>   | SIZE  | CODE IDENT NO | QRTP-151479-III-77 |
| DATE OF ISSUE | 16 JANUARY 1968  | A   | 73293         |                    |
|               |  | REV   |               | SHEET 1 OF 8       |

## 1.0 PURPOSE

- 1.1 The purpose of this document is to outline the steps and conditions to be implemented in qualifying an integrated laser and its power supply for space application.

## 2.0 APPLICABLE DOCUMENTS

- 2.1 Qualification Test Procedure  
2.2 Laser Outline and Mounting Drawings

## 3.0 SCOPE OF TESTS

- 3.1 The qualification tests are designed to evaluate the laser and power supply performance in severe simulated space environments. These tests are to consist of temperature cycling, vibration, shock, acceleration, and thermal-vacuum environments. The environmental qualification tests will be performed on one unit in accordance with a documented test procedure.
- 3.2 At the conclusion of the environmental qualification tests, the laser will be placed on reliability life test. The reliability life tests will consist of a two month thermal vacuum test followed by a sixteen month continuous life test under normal laboratory conditions. Each laser unit will undergo functional tests at the time intervals specified in Table I.
- 3.3 The environmental qualification test sequence to be performed and the stress levels are specified in Table I and Section 5.0 respectively. The chosen stress levels shall provide an indication of the ruggedness of the metal-ceramic design approach. A review of Section 5.0 reveals the severity of the environmental extremes through which the laser package must successfully perform. Table II compares the laser qualification stress levels with those of other space programs.

|  |      |               |                    |
|--|------|---------------|--------------------|
| <b>HUGHES</b><br><b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | ARTP-151479-III-77 |
|  | A    | 73293         |                    |
| DATE OF ISSUE                                      | REV  | SHEET 2 OF 8  |                    |

TABLE II

| PROGRAM NAME  | SINUSOIDAL VIBRATION                   |                                    | RANDOM VIBRATION                                     |                                      | SHOCK TESTS                                  |        |          | THERMO VACUUM           |                              | ACCELERATION LEVELS                              |          |
|---------------|--|------------------------------------|--|--------------------------------------|--|--------|----------|-------------------------|------------------------------|--|----------|
|               | Freq. Hz                               | Peak-G Level                       | Freq. in cps   | Peak G Level $g^2/cps$               | Level  | Time   | Shape    | Temperature °C Low High | Vac.in Torr.                 | G Level  | Time     |
| APOLLO        |  |                                    | 100-480<br>480-570<br>570-630<br>630-670<br>670-2000 | 0.07<br>2.40<br>0.07<br>2.20<br>0.07 | 36g's  | 11 ms  | -        | 25 100                  | $10^{-4}$                    | 20g's  | 5 min.   |
| ATS           | 10-25<br>25-250<br>250-400<br>400-2000 | 1.5<br>7.7<br>12.3<br>5.0          | 20-150<br>150-300<br>300-2000                        | 0.01<br>3db/oct<br>Ramp.<br>0.02     | 20g's  | 8 ms   | 1/2 sine | 4 38                    | $10^{-5}$                    |  |          |
| ITT           | 10-35<br>35-120<br>120-2000            | .4% DA<br>18.0<br>3.5              | 20-150<br>150-300<br>300-2000                        | 0.03<br>0.06                         | 100g's                                       | 6 ms   | 1/2 sine | -24 84                  | $10^{-5}$                    | 18g's  | 180 sec. |
| LUNAR ORBITER | 5-22<br>22-2000                        | 0.9 DA<br>12                       | 20-2000  | 0.45                                 | 30g's  | 5.5 ms | 1/2 sine | -12.3 43.2              | $10^{-2}$<br>$10^{-14}$      | 14g's  | 5 min.   |
| PIONEER       | 10-500<br>500-2000                     | 5<br>10                            | 20-500<br>500-2000                                   | 0.03<br>0.07                         | 50g's  | 6 ms   | **S.T.   | -20.5 65.5              | $10^{-5}$                    | 50g's  | 3 min.   |
| VOYAGER       | 5-26<br>26-52<br>52-500                | $\pm 1.3g$<br>.036DA<br>$\pm 5.0g$ | 150-300<br>Roll off below 150Hz<br>Above 300 Hz      | $1.0g^2$<br>4db/oct<br>6db/oct       | 2" drop on fir bench<br>4" drop on each edge |        |          | -36 5                   | 780 to $2.5 \times 10^{-13}$ | Thrust axis 5.6g<br>1.0g's normal to thrust axis | 5 min.   |
| LASER 3072H   | 5-30<br>30-2000                        | 0.2 DA<br>8.6                      | 5-30<br>30-700<br>700-900<br>900-2000                | .02-.61<br>.61<br>18db/oct<br>0.18   | 78g's  | 10 ms  | **S.T.   | 0* 50*                  | $10^{-5}$                    | 10g's<br>20g's                                   | 3 min.   |

\* Minimum and maximum temperature can be changed to the specific mission requirement, but the deviation ( $\Delta$ ) must not exceed 50°C to maintain specified performance.

\*\* Sawtooth

TABLE 1  
TEST SEQUENCE

ENVIRONMENTAL QUALIFICATION TESTS

|                              | <u>TESTING MODE</u> |
|------------------------------|---------------------|
| 1. Complete Functional Test  |                     |
| 2. Sinusoidal Vibration      | Non-Operational     |
| 3. Complete Functional Test  |                     |
| 4. Random Vibration          | Non-Operational     |
| 5. Complete Functional       |                     |
| 6. Shock                     | Non-Operational     |
| 7. Complete Functional       |                     |
| 8. Temperature Cycling       | Non-Operational     |
| 9. Complete Functional Test  |                     |
| 10. Acceleration Test        | Non-Operational     |
| 11. Complete Functional Test | _____               |

RELIABILITY LIFE TESTS

|  |                      |
|--|----------------------|
| 1. Thermal-Vacuum Test (60 days)   | ON-OFF Cycle         |
| 2. Complete Functional Test  |                      |
| 3. Life Test for 16 Months   | Continuous-Operation |
| 4. Perform Daily Visual Test on Normal Days  |                      |
| 5. Perform Complete Functional Test at<br>500 ± 50 hours intervals and record data |                      |

|   |      |               |                    |
|---|------|---------------|--------------------|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;">HUGHES</div> <div style="display: inline-block; vertical-align: middle;"> <b>ELECTRON DYNAMICS DIVISION</b> </div> | SIZE | CODE IDENT NO | ARTP-151479-III-77 |
|   | A    | 73293         |                    |
| DATE OF ISSUE   |      | REV           | SHEET 4 OF 8       |

3.4 The electrical and environmental requirements are described in Sections 4.0 and 5.0 respectively. The qualification tests shall be performed in accordance with the applicable paragraphs of a Qualification Test Procedure, and in the sequence of tests as listed in Table I whenever possible. Environmental tests may be performed in any sequence if availability of environmental test equipment is a determining factor.

#### 4.0 ELECTRICAL REQUIREMENTS

4.1 The integrated laser and power supply shall meet the electrical requirements applicable to the 3072H Laser. The following is a tabulation of the electrical parameters for the 3072H Laser:

| <u>OPERATIONAL MODE</u>                          | <u>TELEMETRY OUTPUTS</u>    |
|--|-----------------------------|
| Input Voltage, 24 to 32 VDC                      | Temperature 0-5 VDC         |
| Turn-on Time, 6 seconds                          | Pressure 0-5 VDC            |
| Command-ON, 4 to 8v pulse                        | No. 1 Anode Voltage 0-5 VDC |
| Output Power, 5mw minimum, CW, TEM <sub>00</sub> | No. 2 Anode Voltage 0-5 VDC |
| Frequency, 6328°A                                | Output Power 0-5 VDC        |
| Input Power to be Specified.                     | No. 1 Anode Current 0-5 VDC |
| Polarization, .001                               | No. 2 Anode Current 0-5 VDC |
| Beam Diameter, 2mm Maximum                       |                             |
| Divergence — to be Specified                     |                             |
| Angular Deviation — to be specified              |                             |

The complete functional test shall include a verification.

these specified parameters. Other tests shall be added if additional information is needed to optimize design and performance.

#### 5.0 ENVIRONMENTAL REQUIREMENTS

5.1 The environmental tests are designed to qualify the laser for the most prevalent space environments. These environmental tests are similar to those required on other space programs. A Qualification Test Procedure shall be employed to provide orderly methods of testing the laser.

|   |      |               |                    |
|---|------|---------------|--------------------|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;">HUGHES</div> <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | ARTP-151479-III-77 |
|   | A    | 73293         |                    |
| DATE OF ISSUE   |      | REV           | SHEET 5 OF 8       |



5.1.1 Vibration shall be in each of three mutually perpendicular axes as follows:

5.1.1.1 Sinusoidal Vibration

0.2" D.A. from 5-30 cps

8.6 G's peak from 30-2000 cps

Sweep the frequency range up and back once at a sweep rate of one octave per minute. Resonance frequencies shall be noted, dwell at the four main resonance peaks for two minutes.

5.1.1.2 Random Vibration

5-30 cps from 0.02 to 0.61  $g^2/cps$

30-700 cps -- 0.61  $g^2/cps$

700-900 cps -18 db/octave

900-2000 cps -- 0.18  $g^2/cps$

Duration - five minutes per axis.

5.1.2 Shock shall be in each of three mutually perpendicular axes.

5.1.2.1 The shock pulse shall be a terminal peak sawtooth of 78 G's  $\pm 10\%$  for a duration of  $10^{+5}_{-0}$  milliseconds. The decay rate shall be not more than 10% of the total duration.

5.1.3 Temperature cycling shall be from -40°C to 74°C.

5.1.3.1 The temperature cycle shall be as follows:

25°C to -40°C remain for one hour

-40°C to 74°C remain for one hour

74°C to 25°C

Repeat the above temperature cycle three times.

5.1.4 Acceleration shall be in each of three mutually perpendicular axes for a duration of three minutes each.

5.1.4.1 Acceleration shall be 10 G's  $\pm 10\%$  in each axis, followed 20 G's  $\pm 10\%$  in each axis.

|   |                                   |      |               |                    |
|---|-----------------------------------|------|---------------|--------------------|
| <b>HUGHES</b><br><small>DESIGNED • BUILT • TESTED</small> | <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | ARTP-151479-III-77 |
|   |                                   | A    | 73293         |                    |
| DATE OF ISSUE   |                                   | REV  | SHEET 6 OF 8  |                    |

## 6.0 RELIABILITY LIFE TESTS

- 6.1 The reliability life test will consist of a two month thermal-vacuum test and a sixteen month continuous operational test. After the thermal-vacuum test, this laser will also be placed on continuous life test for sixteen months.
- 6.2 The thermal-vacuum tests shall be performed at a pressure of  $10^{-5}$  torr or below. The temperature shall be raised to  $50^{\circ}\text{C}$  and then reduced to  $0^{\circ}\text{C}$  in forty-five minutes and back to  $50^{\circ}\text{C}$  in another forty-five minutes. This cycle (ninety minute cycle) shall be performed six times prior to beginning the sixty day thermal-vacuum test.

The laser will operate within specification limits given in Section 4.0. Input power, voltage, current and TM outputs will be recorded at  $200 \pm 20$  hours intervals during this test.

Table III shows the OFF-ON cycle to be performed during sixty day thermal-vacuum test.

TABLE III  
THERMAL-VACUUM CYCLE

| OFF | ON | DAYS | TEMPERATURE          | PRESSURE       |
|-----|----|------|----------------------|----------------|
| X   |    | 5    | $0^{\circ}\text{C}$  | $10^{-5}$ torr |
|     | X  | 10   | $0^{\circ}\text{C}$  | $10^{-5}$ torr |
| X   |    | 5    | $50^{\circ}\text{C}$ | $10^{-5}$ torr |
|     | X  | 10   | $50^{\circ}\text{C}$ | $10^{-5}$ torr |
| X   |    | 5    | $0^{\circ}\text{C}$  | $10^{-5}$ torr |
|     | X  | 10   | $0^{\circ}\text{C}$  | $10^{-5}$ torr |
| X   |    | 5    | $50^{\circ}\text{C}$ | $10^{-5}$ torr |
|     | X  | 10   | $50^{\circ}\text{C}$ | $10^{-5}$ torr |

|   |           |                        |                    |
|---|-----------|------------------------|--------------------|
| HUGHES<br>ELECTRON DYNAMICS DIVISION<br>DATE OF ISSUE | SIZE<br>A | CODE IDENT NO<br>73293 | ARTP-151479-III-77 |
|   |           | REV                    | SHEET 7 OF 8       |

- 6.3 At the completion of the sixty day thermal-vacuum test, the laser and power supply shall be placed on a sixteen months continuous life test. The laser and power supply shall be operated within the limits of the electrical requirements of this specification. The laser performance shall not decline below the following limits:

| <u>Reliability Test Hours</u> | <u>Output Power</u> |
|-------------------------------|---------------------|
| 0                             | 5 mw or above       |
|                               | 3 mw or above       |
| 10000                         | 2 mw or above       |

The laser will be operated under normal room conditions without any coolant or external fans. The voltages applied to the laser for

cycling shall be those of the ON or OFF command signal. The input power, voltage, current, TM outputs, and other pertaining parameters will be measured at  $500 \pm 50$  hours intervals. The other voltages will be maintained and checked periodically during the life test program.

## 7.0 DOCUMENTATION

- 7.1 Functional test data will be recorded from initial tests through life test. This data will be included as a part of the laser-log book. The log book will consist of a complete history of the laser and power supply. Any variation in test will be noted in the log book.
- 7.2 Any failure occurring during Phase II of the program will be documented on EDD Failure Report forms. Failure reporting and analysis will be under the direction of Hughes Electron Dynamics Division Reliability Manager. This organization will assure implementation of established procedures which will require reporting through a closed-loop system with documented analysis of each part or component failure or malfunction occurrence.
- 7.3 Progress reports will be released periodically documenting the results achieved during the qualification and reliability test program.

|   |      |               |                    |
|---|------|---------------|--------------------|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;">HUGHES</div> <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | ARTP-151479-III-77 |
|   | A    | 73293         |                    |
| DATE OF ISSUE   | REV  |               | SHEET 8 OF 8       |

| REVISIONS |     |             | APPROVED |     |     |     |
|-----------|-----|-------------|----------|-----|-----|-----|
| DATE      | LTR | DESCRIPTION | QC       | R&D | MFG | REL |
|           |     |             |          |     |     |     |

# APPENDIX B

|               |                         |  |               |                  |
|---------------|-------------------------|--|---------------|------------------|
| END USE       | NASA/ERC                | <div>HUGHES</div> <div>ELECTRON DYNAMICS DIVISION</div>      |               |                  |
| PREP BY       | RELIABILITY ENGINEERING | <div>HUGHES AIRCRAFT COMPANY</div>                           |               |                  |
| QC            |                         | RELIABILITY PROGRAM, PHASE II<br>3072H SPACE QUALIFIED LASER |               |                  |
| R&D           |                         |  |               |                  |
| MFG           |                         |  |               |                  |
| REL           | <i>RAD</i>              | SIZE   | CODE IDENT NO | RP-151479-III-77 |
| DATE OF ISSUE | 15 January 1968         | A  | 73293         |                  |
|               |                         | REV  |               | SHEET 1 OF 11    |

## I. INTRODUCTION

This plan describes a proposed reliability program to be conducted during Phase II of the Space Qualified Laser Program. The plan establishes an integrated reliability effort which is intended to conform to the program objectives.

The program described herein is designed to provide (1) effective planning and management of the reliability effort, (2) assurance through a well designed monitoring and evaluation program, and (3) definition of major reliability engineering tasks time-phased to the engineering effort.

Section II describes the Hughes Aircraft Company reliability management plan with the organization structure and program interfaces.

Section III outlines the reliability program tasks to be undertaken. Emphasis during Phase II is placed upon an analytical evaluation of the laser design reliability and lifetime characteristics. This effort is aimed at assessment of reliability status and the elimination of failure modes and mechanisms.

Section IV describes the techniques used to monitor, evaluate and report reliability status. These techniques allow implementation of timely corrective action when potential problem areas are discovered. The specific items discussed are reliability assessment; parts program; program reviews; supplier monitoring and control; test monitoring and evaluation; failure reporting; and reliability documentation.

|   |                                   |      |               |                 |
|---|-----------------------------------|------|---------------|-----------------|
| <b>HUGHES</b><br><small>HUGHES AIRCRAFT COMPANY</small> | <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP151479-III-77 |
|   |                                   | A    | 73293         |                 |
| DATE OF ISSUE   |                                   | REV  | SHEET 2 OF 11 |                 |

## II. RELIABILITY MANAGEMENT

The laser program management team includes personnel from functional departments who have direct line access to top division management. The development of the Space Qualified Laser is assigned to a program manager within the Hughes Electron Dynamics Division. Functional organizations provide technical, reliability and quality assurance support for the program. The organizational structure and program interfaces for this program are shown in Figure 1.


The basic reliability philosophy is to design the optimum reliability level into the laser during the developmental and design program phases. These reliability objectives are achieved through close working relationships between the design engineers and the cognizant reliability engineer.

The reliability manager shall direct the overall reliability effort in an effective manner by time-phasing his area's activities with those of the design engineers. He has direct line access to top division management. This type of organization is keyed to the National Aeronautics and Space Administration's space programs in exerting a strong reliability assurance program.

Reliability objectives will be met through continuous evaluation of the laser package from conceptual design to a fully qualified laser unit. Reliability assessment will be performed on all major components to optimize reliability. This and other assessments are part of reliability responsibility in uncovering potential problem areas. Special emphasis is being placed on components stress levels and laser construction to localize early in the program critical areas of marginal performance and reliability. Through a close working relationship between the designers and reliability specialists, proper application of parts and materials will be ensured.

|  |                                   |      |               |                  |
|--|-----------------------------------|------|---------------|------------------|
| <b>HUGHES</b><br><small>DESIGNING THE FUTURE</small> | <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP-151479-III-77 |
|  |                                   | A    | 73293         |                  |
| DATE OF ISSUE  |                                   | REV  |               | SHEET 3 OF 11    |

## RESEARCH LABORATORIES

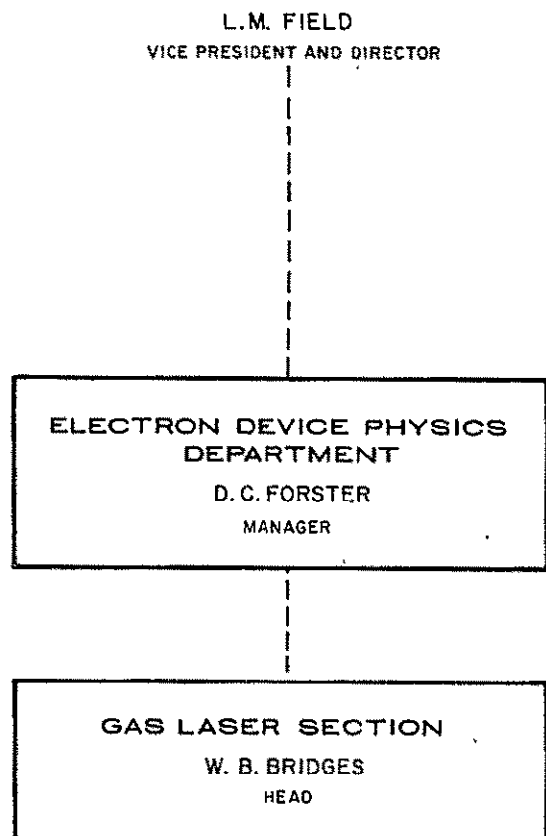

## ELECTRON DYNAMICS DIVISION

E835-10R1

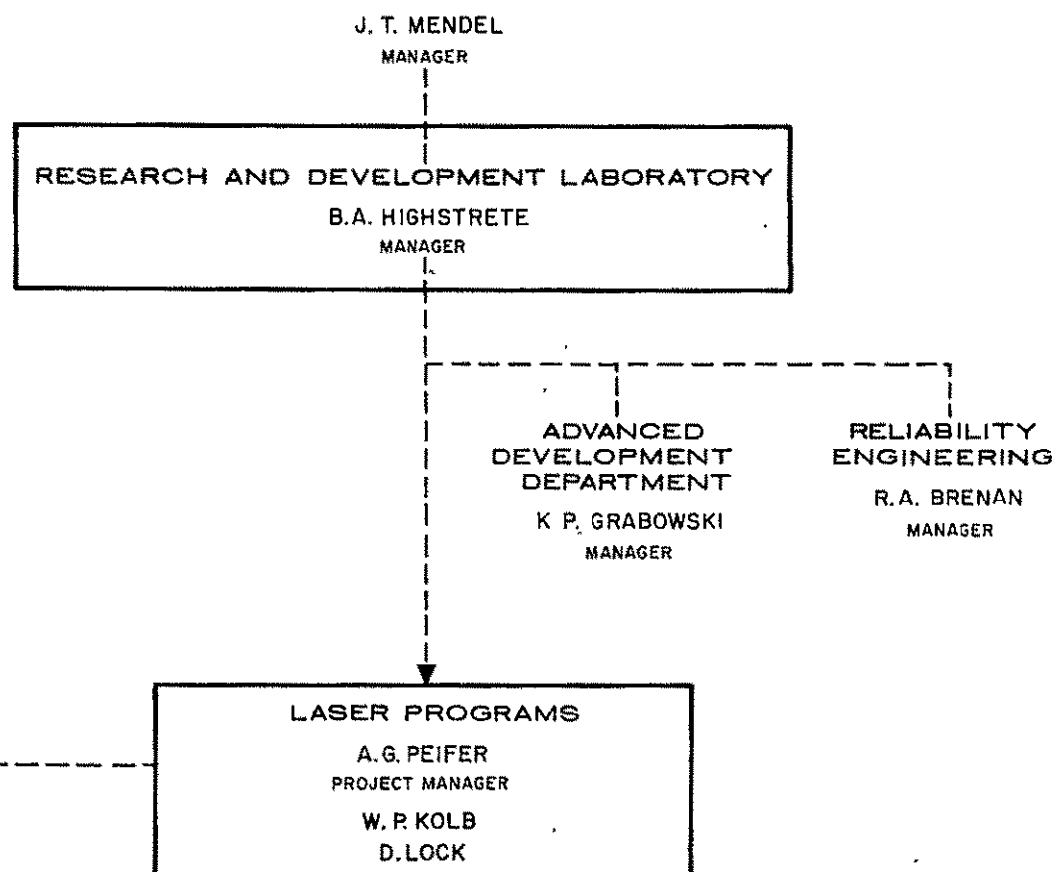


Fig. 1. Abbreviated organizational chart showing line responsibilities of personnel anticipated to be involved with this program, as well as program organization.

### III. RELIABILITY PROGRAM TASKS

The following are the major reliability engineering tasks to be performed during the Phase II Space Qualified Laser Program:

1. Prepare failure modes, effects and criticality analysis based upon the evaluation of functional failure modes and mechanisms, wearout characteristics and determine their effect upon laser reliability and life.
2. Prepare reliability assessment report including a reliability prediction, and operational lifetime discussion, based upon data gathered from Phases I and II.
3. Investigate materials and processes selected for consistency with established experience.
4. Plan and monitor qualification-reliability test program.
5. Review and evaluate results obtained from qualification and reliability tests for a positive or negative effect upon reliability achievement.
6. Monitor, collect, process, analyze, and recommend corrective action on any malfunction which may occur during qualification of the integrated laser package.
7. Participate in informal HAC/ERC Program Reviews as required to support the program.

The tasks listed are integral to the program activity and constitute a basis for reliability assessment by the project engineer and reliability engineer. This effort further provides a timely means for guiding performance, reliability and environmental tradeoffs. The procedures and assessment techniques used are outlined in Section IV.

|  |                                   |      |               |                  |
|--|-----------------------------------|------|---------------|------------------|
| <b>HUGHES</b><br><small>SPACE PROGRAMS</small> | <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP-151479-III-77 |
|  |                                   | A    | 73293         |                  |
| DATE OF ISSUE                                  |                                   | REV  | SHEET 5 OF 11 |                  |



#### IV. RELIABILITY PROGRAM

This section further details the reliability program tasks for the Space Qualified Laser Program. The primary objective is to assess reliability status and to effect program and design improvements which will ensure attainment of the reliability and lifetime objectives.

##### RELIABILITY ASSESSMENT

Reliability assessment will be initiated at contract go-ahead and continue throughout the Phase II program. Scheduled milestones will occur at key points in the program. The primary reliability assessment activities include the preparation of a reliability prediction, a failure modes, effects and criticality analysis, evaluation of operational lifetime characteristics, evaluation of materials and processes, and assessment of test results. Reliability experience and achievement of similar lasers will be used whenever practical. The result of these studies will be a reliability assessment report.

Reliability assessments will be made for the laser tube, its power supplies and the integrated laser unit. During Phase I of the program, the initial reliability assessments have been based upon the conceptual design with results presented at the final Phase I Program Review.

Reliability estimates will continue through the Phase II development cycle to optimize reliability through the use of high reliability (or mil spec) parts, circuit and part derating, and to make design tradeoffs. Reliability predictions will be finalized for the qualified design configuration utilizing mean-time-between-failure histories, actual stress and duty factors and environmental stress levels.

As an important part of the early system design analysis, the project reliability engineer will develop projected analyses of the laser to determine the possible failure modes and the effects of such failures on mission success. This analysis will utilize reliability logic diagrams

|   |                                   |      |               |                  |
|---|-----------------------------------|------|---------------|------------------|
| <b>HUGHES</b><br><small>SPACE QUALITY CONTROL</small> | <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP-151479-III-77 |
|   |                                   | A    | 73293         |                  |
| DATE OF ISSUE   |                                   | REV  |               | SHEET 6 OF 11    |

to analyze the effects of various failure modes. Conceivable failures, which the designer or development engineer most familiar with the design believes could occur, will be listed on design reliability analysis forms. Accompanying the conceivable failures will be the anticipated causes, the severity and effect on performance of each type of failure, its anticipated frequency or probability of occurrence and the design and manufacturing techniques incorporated to minimize the failure occurrence probability. Such analyses will provide the means whereby an objective look may be taken at the integrated laser and its true failure possibilities and their effects evaluated. Wearout characteristics will be a natural outgrowth of this analysis.

An electrical stress analysis will determine the stress level on each electronic component in the power supply. The reliability engineer will use MIL-HDBK-217A, "Reliability Stress and Failure Rate Data for Electronic Equipment," as a guide for reliability modeling and methods for determining operating stress levels. The stress level will be used in determining the failure rate of each component. The summation of these failure rates of all components will determine the power supply reliability level. This analysis will be part of the reliability documentation package.

Reliability assessments will be revised as required by evaluation of each design change, and as data from the tests becomes available indicating a positive or negative effect upon predicted reliability.

#### PARTS PROGRAM

A program covering the selection, specification and application review of parts and materials will be implemented during the laser development.

Hughes places emphasis upon the procurement of parts consistent with the design requirements and to maintenance of stringent controls over all parts fabricated and procured. In this program, maximum emphasis is placed upon approved and space qualified parts and materials with circuit and part

|   |                                   |      |               |                  |
|---|-----------------------------------|------|---------------|------------------|
| <b>HUGHES</b><br><small>MEMBER OF HUGHESS &amp; COMPANY</small> | <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP-151479-III-77 |
|   |                                   | A    | 73293         |                  |
| DATE OF ISSUE   |                                   | REV  |               | SHEET 7 OF 11    |

derating, and minimum practicable styles of generic component types. In addition, it is proposed that mil-spec electronic parts incorporated into the Phase II lasers be processed through Level II receiving-inspection (Reference Table I). Additional pre-conditioning and parameter screening methods, Level I, may be employed for space flight production units in order to achieve ultra high reliability. It may be noted that Hughes has a large number of high reliability parts specifications which are approved by NASA and other agencies for several space programs (Surveyor, ATS, Syncom, Intelsat, etc.). Parts for the laser will be selected from the Hughes list of proven space qualified parts as far as practical. This will allow substitution of high reliability screened parts for mil-spec parts in flight production hardware.

The use of non-standard parts will be discouraged; however, when a suitable part cannot be found among the Hughes preferred parts lists, a non-standard part will be selected. All data accumulated on the part will be reviewed for applicability to the design and environment prior to application approval. Space qualification data will be collected from the NASA Data Center and other satellite contractors.

Parts selection will be governed by Hughes Electron Dynamics Division Preferred Parts List which will be issued to detail for all program personnel the ground rules, as specified in the Phase II contract, for the selection of electrical and mechanical parts. This PPL will be issued by HAC/EDD Reliability Engineering at the beginning of Phase II and will be included as a requirement for all procurement documents.

Hughes Electron Dynamics Division Reliability Engineering will be directly responsible for the implementation and control of the parts program. It will maintain an up-to-date approved and qualified parts and materials list to be distributed to all design and fabrication activities. In the event that a part or material not on this list is required, a request for approval will be submitted to Hughes Reliability Engineering. Reliability Engineering will then review and approve all parts, both standard and non-standard. This

|  |      |               |                  |
|--|------|---------------|------------------|
| <b>HUGHES</b><br>ELECTRON DYNAMICS DIVISION<br>DATE OF ISSUE | SIZE | CODE IDENT NO | RP-151479-III-77 |
|  | A    | 73293         |                  |
|  | REV  | SHEET 8 OF 11 |                  |

TABLE I

TESTING LEVELS FOR SPACE QUALIFIED LASER

|             | <u>LEVEL I</u><br><u>HIGH RELIABILITY</u>  | <u>LEVEL II</u><br><u>MIL-SPEC. PARTS</u>  |
|-------------|--|--|
| Resistors   | Condition with 5 temperature cycles and 168 power burn-in. Screen on degradation criteria of $\Delta R$ .  | DGR Resistance at 25°C.  |
| Capacitors  | Condition with 5 temperature cycles and high temperature bias for 168 hours. Screen on degradation criteria of $\Delta C$ , $D_f$ and $\Delta I_L$ or $\Delta I_R$ .   | Measure capacitance, dissipation factor and leakage current or insulation resistance all at 25°C.  |
| Diodes      | <u>Conditioning</u> <ul style="list-style-type: none"> <li>- Seal Test</li> <li>- Accelerate</li> <li>- High Temp Storage</li> <li>- High Temp Reverse Bias</li> <li>- 168 Hrs. Power Burn-in</li> </ul> Screen in degradation criteria $V_f$ and $I_R$ and special device parameters such as $T_{rr}$ , $C_j$ , $V_z$ , $Z_z$ , etc.                                    | Measure $B_V$ , $I_R$ and $V_f$ at 25°C and perhaps high temperature $I_R$ and special device parameter $V_z$ , $Z_z$ , $T_{rr}$ , $C_g$ |
| Transistors | <u>Conditioning</u> <ul style="list-style-type: none"> <li>- Seal Test</li> <li>- Acceleration</li> <li>- High Temp Reverse Bias for 48 hours collector base</li> <li>- 168 hours of power burn-in at elevated temperature.</li> </ul> Screen on degradation criteria for $I_{CBO}$ , $I_{EBO}$ , $H_{FE}$ , $V_{CE(Sat.)}$ , $V_{BE(Sat.)}$ , $BV_{CEO}$ , $BV_{CBO}$ . | Measure $I_{CBO}$ , $I_{EBO}$ , $H_{FE}$ , $V_{CE(Sat.)}$ , $V_{BE(sat.)}$ , $BV_{CEO}$ , $BV_{CBO}$ , and special device parameters.    |

HUGHES

ELECTRON DYNAMICS DIVISION

SIZE CODE IDENT NO

A

73293

RP-151479-III-77

DATE OF ISSUE

REV

SHEET 9 OF 11

EDD-1047C / EDD / 8-67 REV.

107

107

will assure maximum use of qualified parts and will allow Reliability Engineering to make recommendations for a substitute part and/or vendor of the part.

#### PROGRAM REVIEWS

Informal program reviews will be held periodically by the project manager to evaluate program status and resolve problem areas. Personnel from technical areas such as design, fabrication, processes, materials, reliability and quality are invited to participate. The project engineer provides an up-to-date synopsis of the performance of the laser and reviews program tasks. These reviews assure cognizance of the total program and timely achievement of the overall specification requirements.

In addition, Reliability Engineering will participate in program reviews which are held with NASA as required to resolve interface problems and provide program visibility.


#### SUPPLIER MONITORING AND CONTROL

To assure maximum reliability and quality of purchased parts and materials, Hughes' comprehensive program of vendor and subcontractor selection, surveillance and inspection will be implemented. As in all space programs, the quality history of every supplier is evaluated by reliability and quality representatives of the Electron Dynamics Division prior to selection.

In this program, suppliers will be required to provide Electron Dynamics Division with parts, manufacturing and process visibility to ensure maintenance or reliability and quality standards. The vendor control program will be implemented and supported by the quality assurance organization at Hughes.

#### TEST MONITORING AND EVALUATION

Reliability Engineering is directly responsible for the overall reliability evaluation program and for ensuring that the integrated test program adequately contributes to reliability assessment and improvement. The responsibilities designated to reliability personnel in the integrated test program encompass the following tasks:

|   |      |               |                  |
|---|------|---------------|------------------|
|  <b>HUGHES</b><br><b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP-151479-III-77 |
|   | A.   | 73293         |                  |
| DATE OF ISSUE   | REV. |               | SHEET 10 OF 11   |

1. Incorporation of reliability requirements into the overall test program.
2. Analysis of test results to determine capabilities of meeting reliability goals, and to identify failure modes and mechanisms.
3. Prepare Qualification-Reliability Test Program Plan.
4. Schedule and Monitor Qualification and Reliability Tests.
5. Review and follow-up of failure analyses and corrective actions for their effect on the reliability status.

The qualification-reliability test program is designed to evaluate the performance capability of the laser and is directed toward identification of problem areas which may not be revealed in the design phase or reliability evaluations. A test report will be prepared and submitted to NASA at the conclusion of the program.

#### FAILURE REPORTING

The effectiveness of the reliability and quality effort will be enhanced by implementation of the Hughes failure reporting system encompassing recording, collection, analysis, reporting, and corrective action with monitoring to ensure follow through.

Failure reporting will be under the direction of the Hughes Electron Dynamics Division Reliability Manager. He will assure implementation of established procedures which will require failure reporting through a closed loop system with documented analysis of each part or component failure or malfunction occurrence.

#### RELIABILITY DOCUMENTATION

Reliability documentation will be in accordance with the requirements of the purchase specification. Specific reliability documentation proposed includes:

1. Reliability Assessment Report
2. Qualification-Reliability Test Plan
3. Qualification-Reliability Test Report

Progress will be reported periodically as applicable to the particular program phase as part of the regular engineering progress reports.

|   |      |               |                  |
|---|------|---------------|------------------|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;">HUGHES</div> <b>ELECTRON DYNAMICS DIVISION</b> | SIZE | CODE IDENT NO | RP-151479-III-77 |
|   | A    | 73293         |                  |
| DATE OF ISSUE   |      | REV           | SHEET 11 OF 11   |

PRECEDING PAGE BLANK NOT FILMED 57

| REVISIONS |     |             | APPROVED |     |     |     |
|-----------|-----|-------------|----------|-----|-----|-----|
| DATE      | LTR | DESCRIPTION | QC       | R&D | MFG | REL |
|           |     |             |          |     |     |     |

APPENDIX C

|                               |                                  |                         |                   |                            |  |
|-------------------------------|----------------------------------|-------------------------|-------------------|----------------------------|--|
| END USE                       |                                  | HUGHES                  |                   | ELECTRON DYNAMICS DIVISION |  |
| PREP BY J. J. Haupt           |                                  | HUGHES AIRCRAFT COMPANY |                   |                            |  |
| QC                            | HAC/EDD QUALITY ASSURANCE SYSTEM |                         |                   |                            |  |
| R&D                           |                                  |                         |                   |                            |  |
| MFG                           |                                  |                         |                   |                            |  |
| REL                           | SIZE                             | CODE IDENT NO           | QAS-151479-III-77 |                            |  |
| DATE OF ISSUE 23 January 1968 | A                                | 73293                   |                   |                            |  |
|                               | REV                              |                         | SHEET 1 OF 5      |                            |  |

## 1.0 INTRODUCTION

### 1.1 General

The provisions herein are the basic operating methods and disciplines used by Hughes Electron Dynamics Division (EDD) which are compatible with NPC 200-3.

## 2.0 BASIC REQUIREMENTS

### 2.1 General

Quality Assurance activities are planned and performed in conjunction with engineering, fabrication, and other functions in a manner that will assure the continuous maintenance of quality requirements throughout all phases of development and fabrication.

### 2.2 Change Control

- 2.2.1 Prints - Engineering will control the release and changes to engineering requirements in accordance with Division Operation Procedures. Print release will be through the Engineering Change Control Center and will include distribution to appropriate points available to fabrication stations, inspection stations, and the control point distribution list. Obsolete data will be destroyed at the point of change effectivity by holders of controlled prints. Quality Assurance will revise quality instructions to include the changes prior to their effectivity, and assure compliance with changes.
- 2.2.2 Effectivity - New part numbers will be assigned when engineering changes affect interchangeability.

Quality Assurance will assure incorporation of changes at the specific effectivity points.

## 3.0 DESIGN AND DEVELOPMENT

### 3.1 Drawing and Specification Review

- 3.1.1 Quality Assurance shall participate at regularly scheduled program reviews. Of primary concern will be those items which determine or control the quality of purchased or HAC/EDD produced

|                                      |      |               |              |
|--------------------------------------|------|---------------|--------------|
| HUGHES<br>ELECTRON DYNAMICS DIVISION | SIZE | CODE IDENT NO |              |
|                                      | A    | 73293         |              |
| DATE OF ISSUE                        |      | REV           | SHEET 2 OF 5 |



material such as: a) Reliability; b) Critical quality characteristics; c) Peculiar test or inspection methods; and d) Tolerances.

#### 4.0 PROCURED MATERIAL

##### 4.1 Procurement Documents

All purchase orders issued will be screened by the Quality Engineering section to assure compliance with specification requirements. Procurement will be from those sources on the approved supplier list.

##### 4.2 Selection of Procurement Sources

4.2.1. General - Quality Assurance Engineering will participate during supplier survey operations. Surveys will be conducted for those suppliers that are not already approved.

4.2.2 Records - Quality Assurance will maintain records necessary for establishing and maintaining a quality history for each subcontractor and supplier in accordance with standard evaluation and rating procedure.

##### 4.3 HAC/EDD Source Inspection

When it is not feasible to determine Quality conformance upon receipt, HAC/EDD will utilize source inspection.

##### 4.4 Government Source Inspection

Government Source Inspection for those items specified in the contract shall be required on HAC/EDD procurement documents where the requirement is applicable.

#### 5.0 INSPECTION AND TEST

##### 5.1 Receiving Inspection

Receiving Inspection will have all the necessary inspection and test equipment, drawings, specifications, catalogs, processes, etc., available in order to perform its operation upon receipt of the item.

5.1.1. Characteristics inspected will be verified in accordance with applicable drawings, specifications, EDD processes, or procedures. Items not conforming are to be referred to the Materials Review Board.

5.1.2 Raw material will be chemically and physically analyzed as required.

|                                      |      |               |              |
|--------------------------------------|------|---------------|--------------|
| HUGHES<br>ELECTRON DYNAMICS DIVISION | SIZE | CODE IDENT NO |              |
|                                      | A    | 73293         |              |
| DATE OF ISSUE                        |      | REV           | SHEET 3 OF 5 |

- 5.1.3 Adequate methods and facilities for controlling the handling and storage of raw and fabricated material will be utilized.
- 5.2 Engineering drawings and specifications will be utilized as primary criteria for determining product conformance. Additional written inspection and test procedures will be provided for determining product conformance. These documents and standards shall be available to all personnel responsible for fabrication, assembly, inspection and test.

5.3 Qualification Test Procedure

A qualification test procedure will be prepared and include the following:

- A. Article identification
- B. Test equipment block diagrams
- C. Special environmental conditions that must be maintained
- D. Criteria for determining conformance or rejection

6.0 NONCONFORMING MATERIAL

6.1 Material Review

Articles and/or materials which do not conform to drawings, specifications or contractual requirements, shall be submitted to a formal Material Review Board for consideration and disposition.

6.2 Control of Nonconforming Material

Quality Assurance will provide for the segregation and identification of defective articles. Dispositions by the MRB shall be clearly documented, one copy retained on file and one shall accompany the article.

7.0 INSPECTION, MEASURING AND TEST EQUIPMENT

7.1 General

The EDD system for the calibration, maintenance, and control of inspection and test measuring equipment used to determine conformance with specifications and contract requirements meets the requirements of MIL-C-45662A.

8.0 INSPECTION STAMPS

8.1 General

The EDD quality stamp control system provides for control, issuance, traceability and usage of inspection stamps.

|                                      |      |               |              |
|--------------------------------------|------|---------------|--------------|
| HUGHES<br>ELECTRON DYNAMICS DIVISION | SIZE | CODE IDENT NO |              |
|                                      | A    | 73293         |              |
| DATE OF ISSUE                        |      | REV           | SHEET 4 OF 5 |

9.0 PRESERVATION, PACKAGING AND SHIPPING

9.1 Packaging and Shipping

9.1.1 Packaging - Packaging requirements will be defined in a manner which will assure the prevention of damage, deterioration or corrosion of the item during the packaged state. The method of packaging shall be as defined by engineering specification.

9.1.2 Shipping - Packaged articles will be identified and marked in accordance with applicable procedures and specifications. In the absence of packaging and marking requirements in the contract, packing and marking shall comply with ICC rules and regulations and shall ensure safe arrival and ready identification at destination.

10.0 SAMPLING INSPECTION

10.1 Sampling Inspection Plans

Sampling Inspection shall be in accordance with Military Sampling Plans.

11.0 QUALITY DATA AND CORRECTIVE ACTION

11.1 Quality Data

Quality data is maintained through the use of records of inspections and tests performed during the fabrication and assembly processes. The records will provide evidence that the required inspections and tests have been performed. These records will indicate part or article identification, the inspection or test involved, quantity of items conforming and nonconforming, and the nature and disposition of defects.

11.2 Corrective Action

Quality data will be continually analyzed and investigations conducted as necessary to correct discrepancies. Corrective action will be timely to prevent recurrence of the discrepancies.

12.0 AUDIT OF QUALITY PERFORMANCE

12.1 Performance of Audits

Audits of the adequacy of quality procedures, inspection, tests and process controls will be performed on a scheduled basis by an impartial team of quality supervisors and/or quality engineers.

|                                      |      |               |              |
|--------------------------------------|------|---------------|--------------|
| HUGHES<br>ELECTRON DYNAMICS DIVISION | SIZE | CODE IDENT NO |              |
|                                      | A    | 73293         |              |
| DATE OF ISSUE                        |      | REV           | SHEET 5 OF 5 |